SEPTEMBER 11, 1959

electronics

A McGRAW-HILL PUBLICATION VOL. 32, No. 37 PRICE SEVENTY-FIVE CENTS

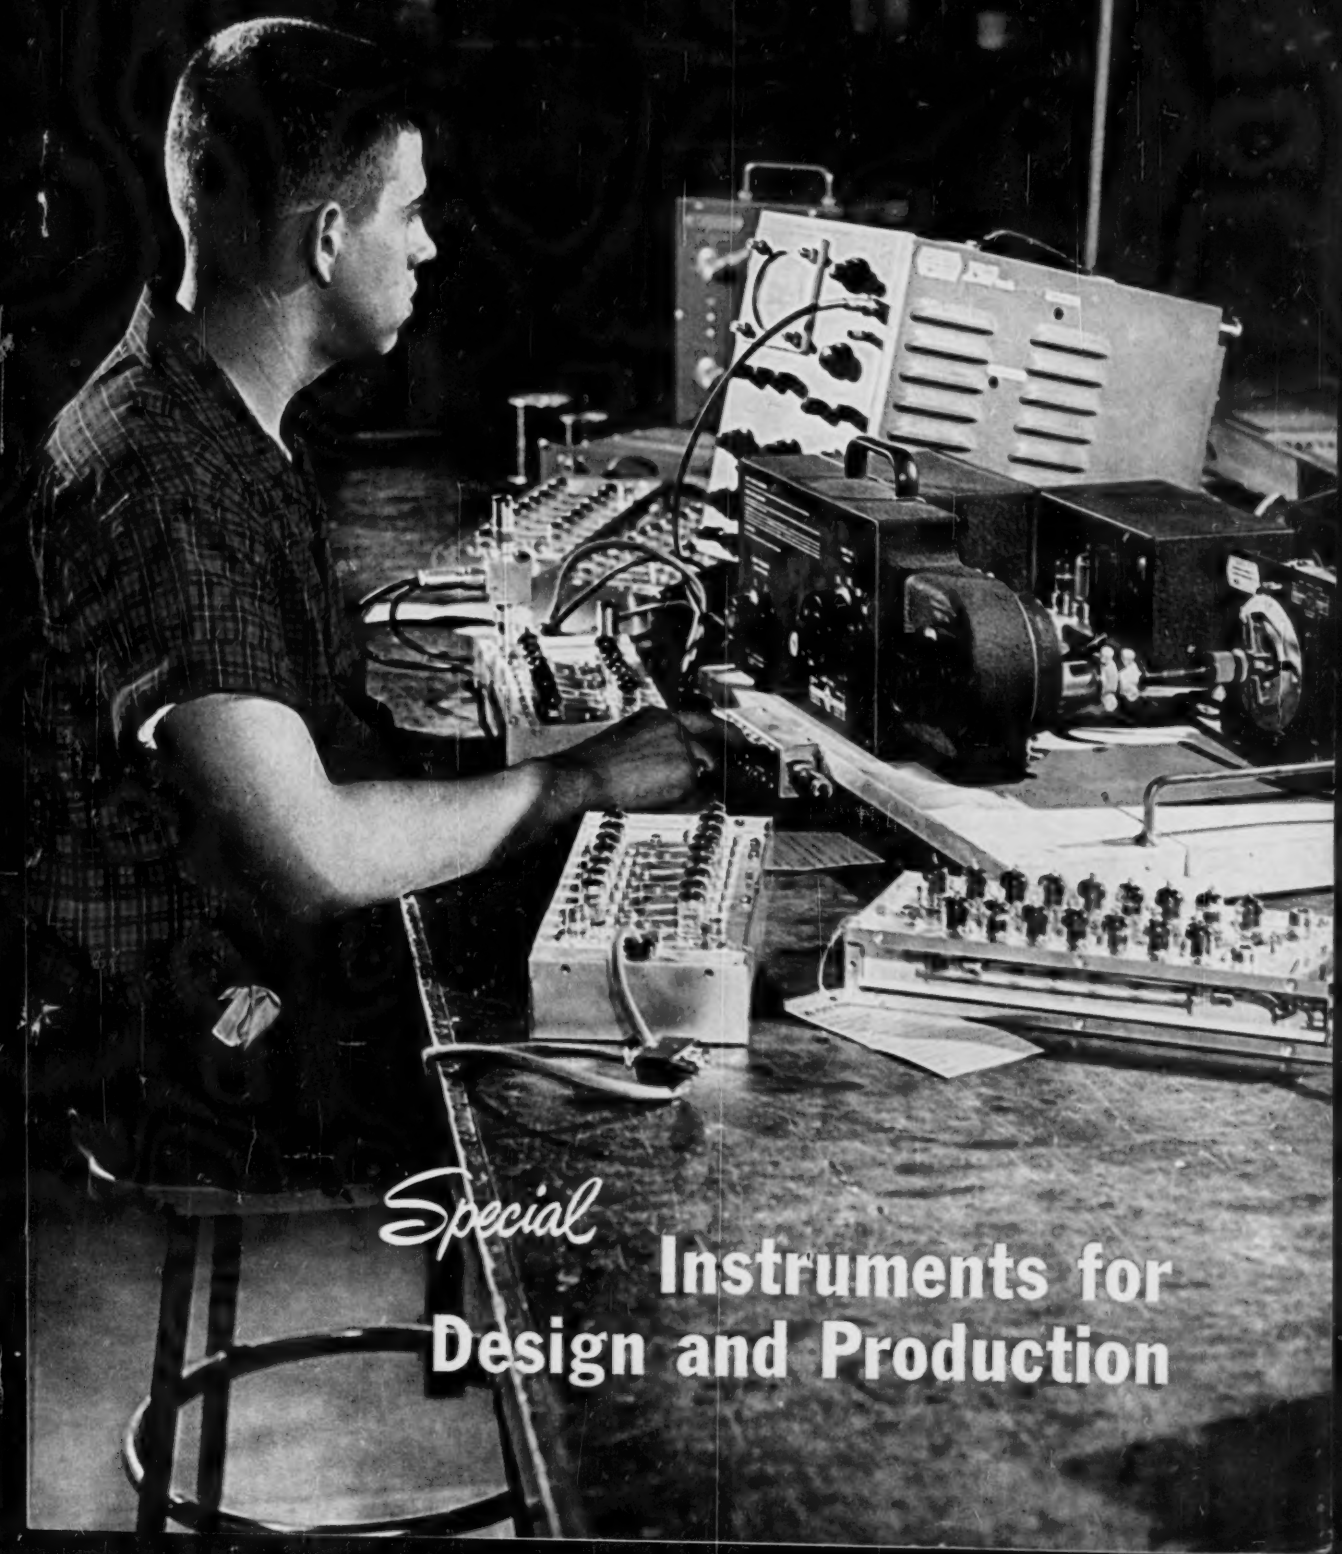

Special Instruments for Design and Production

High-Q Inductors.... FROM STOCK

As largest producers in this field for over two decades, UTC inductors cover virtually every need for both fixed and variable units of exceptional stability. Hermetic units have been proved to MIL-T-27A, eliminating costs and delays of initial MIL-T-27A testing.



For complete listing of our 700 stock items (300 hermetic) write for catalog.

HVC Hermetic Variable Inductors

A step forward from our long established VIC series. Hermetically sealed to MIL-T-27A...extremely compact...wider inductance range...higher Q...lower and higher frequencies...superior voltage and temperature stability. Case 25/32 x 1⅛ x 1 7/32, 2 oz.



Type No.	Min. Hys.	Mean Hys.	Max. Hys.
HVC-1	.002	.006	.02
HVC-2	.005	.015	.05
HVC-3	.011	.040	.11
HVC-4	.03	.1	.3
HVC-5	.07	.25	.7
HVC-6	2	.6	2
HVC-7	.5	1.5	5
HVC-8	1.1	4.0	11
HVC-9	3.0	10	30
HVC-10	7.0	25	70
HVC-11	20	60	200
HVC-12	50	150	500

HVC

MQ drawn case structure

	Length	Width	Height	Oz.
MQE	1/2	1-1/16	1-7/32	1.5
MQA, MQB	11/16	1-9/32	1-23/32	4
MQ5	1-5/16	2-9/16	2-13/16	14



MQA
19 stock values from 7 Mhy. to 22 Hy.



MQE
15 stock values from 7 Mhy. to 2.8 Hy.

MQB
12 stock values from 10 Mhy. to 25 Hy.



MQD

New extreme stability inductors for 12KC to 130KC range. Typical Q is 170 @ 50KC. 6 stock values from 2 mhy. to 20 mhy.

MQ Series Compact Hermetic Toroid Inductors

The MQ permalloy dust toroids combine the highest Q in their class with minimum size. Stability is excellent under varying voltage, temperature, frequency and vibration conditions. High permeability case plus uniform winding affords shielding of approximately 80 db.

MQL Low Frequency High Q Coils

The MQL series of high Q coils employ special laminated Hipermalloy cores to provide very high Q at low frequencies with exceptional stability for changes of voltage, frequency and temperature. Two identical windings permit series, parallel, or transformer type conections. 1-13/16 dia. x 2½" H.

MQL-0	.25/1 Hys.
MQL-1	2.5/10 Hys.
MQL-2	5/20 Hys.
MQL-3	50/200 Hys.
MQL-4	100/400 Hys.
MQL-5	625/2500 Hys.



DI Inductance Decades

These decades set new standards of Q, stability, frequency range and convenience. Inductance values laboratory adjusted to better than 1%. Units housed in a compact die cast case with sloping panel ideal for laboratory use ... 4½ x 4⅜ x 2⅜ high.



DI-1 Ten 10 Mhy. steps.
DI-2 Ten 100 Mhy. steps.
DI-3 Ten 1 Hy. steps.
DI-4 Ten 10 Hy. steps.



VIC case structure

Length	Width	Height	Oz.
1-1/4	1-11/32	1-7/16	5-1/2



Type	Mean Hys.	Type	Mean Hys.
VIC-1	.0085	VIC-12	1.3
VIC-2	.013	VIC-13	2.2
VIC-3	.021	VIC-14	3.4
VIC-4	.034	VIC-15	5.4
VIC-5	.053	VIC-16	8.5
VIC-6	.084	VIC-17	13.
VIC-7	.13	VIC-18	21.
VIC-8	.21	VIC-19	33.
VIC-9	.34	VIC-20	52.
VIC-10	.54	VIC-21	83.
VIC-11	.85	VIC-22	130.

VIC Variable Inductors

The VIC Inductors have represented an ideal solution to the problem of tuned audio circuits. A set screw in the side of the case permits adjustment of the inductance from +85% to −45% of the mean value. Setting is positive.

Curves shown indicate effective Q and L with varying frequency and applied AC voltage.

SPECIAL UNITS TO YOUR NEEDS
Send your specifications for prices.

UNITED TRANSFORMER CORPORATION
150 Varick Street, New York 13, N. Y.
PACIFIC MFG. DIVISION: 4008 W. JEFFERSON BLVD., LOS ANGELES 16, CALIF.
EXPORT DIVISION: 13 EAST 40th STREET, NEW YORK 16, N. Y. CABLES: "ARLAB"

electronics

SEPTEMBER 11, 1959

A McGRAW-HILL PUBLICATION
Vol. 32 No. 37

JAMES GIRDWOOD, *Publisher*

W. W. MacDONALD, *Editor*

JOHN M. CARROLL, *Managing Editor*

Associate Editors: Frank Leary, Michael F. Tomaino, Howard K. Janis, Sylvester P. Carter, Roland J. Charest, William P. O'Brien, George Sideris, John F. Mason, William E. Bushor, Thomas Emma, Samuel Weber, Sy Vogel, Leslie Solomon, M. M. Perugini.

Pacific Coast Editor (Los Angeles) Harold C. Hood; *Midwestern Editor* (Chicago) Harold Harris; *New England Editor* (Boston) Thomas Maguire.

Art Director, Harry Phillips, Roy Thompsen.

Production Editor, John C. Wright, Jr., Bernice Duffy.

Market Research, Edward DeJongh.

Editorial Assistants, Gloria J. Filippone, Arlene Schilp, Patricia Landers, Eleanor Schaefer, Carol Weaver.

BRUCE A. WINNER, *Advertising Sales Manager.* R. S. Quint, *Assistant Advertising Sales Manager and Buyers' Guide Manager.* Fred Stewart, *Promotion Manager.* Frank H. Ward, *Business Manager.* George E. Pomeroy, *Classified Manager.* Hugh J. Quinn, *Circulation Manager.*

New York: Donald H. Miller, Henry M. Shaw, William J. Boyle. *Boston:* Wm. S. Hodgkinson. *Philadelphia:* Warren H. Gardner. *Chicago:* Harvey W. Wernecke, Martin J. Gallay. *Cleveland:* P. T. Fegley. *San Francisco:* T. H. Carmody, R. C. Alcorn. *Los Angeles:* Carl W. Dysinger, D. A. McMillan. *Denver:* J. Patten. *Atlanta:* M. Miller. *Dallas:* Gordon L. Jones, Robert T. Wood. *London:* E. E. Schirmer. *Frankfurt:* Michael R. Zeynel.

Issue at a Glance

Business

Army to Beef Up Sky Watch. Exclusive look at a tracking center....40

Training Men for Overseas. Here's what companies do.....47

Industry Grows In Northwest. Report from Portland, Ore., area....52

Explorer VI Transmitting Well. Finding many low-energy particles..59

Shoptalk 4
Electronics Newsletter 11
Washington Outlook 14
Financial Roundup 23
25 Most Active Stocks..... 23
Market Research 28
Current Figures 28
Meetings Ahead 62

Engineering

Worker tests ultrawide-band chain amplifiers on Spencer-Kennedy Labs' production line, using General Radio's automatic sweep drive and other instruments. See p 89.....COVER

Instruments for Design and Production. Trends, including design and packaging concepts for tomorrow's instruments. By W. E. Bushor 89

Survey of Japanese Electronic Devices. Covers home entertainment devices, components and industrial equipment....By L. Solomon 109

Increasing Counting System Reliability. Transistors drive glow-tube scaler.....By H. A. Kampf 112

Electroforming of Intricate Electronic Components. Flexible tool for electronics engineers.....By E. B. Murphy 114

Low-Distortion Transistor Amplifier. Power transistors are used in a 10-w high-fidelity amplifier.....By H. J. Paz 118

Miniature Photocell Measures Blood Volume. Plethysmograph assists diagnosis.....By H. E. Guttmann 122

Departments

Research and Development. Ultrasonic Camera Supplements X-rays.124

Components and Materials. Developments in Composite Laminates..128

Production Techniques. Mechanized Transistor Assembly.....132

On the Market..... 136
Literature of the Week.... 222
Plants and People..... 224
News of Reps..... 227
Comment 228
Index to Advertisers..... 243

Low cost, versatile DIGITAL SYSTEMS

for automatic testing of transistors resistors diodes and capacitors

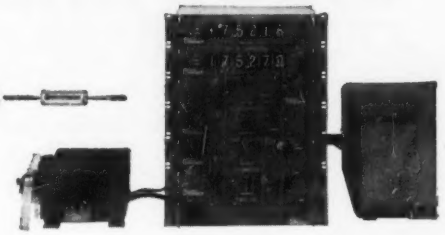

Small E-I automatic digital systems provide many advantages. First, they cost less. This is primarily the result of large-quantity manufacture of modules which make up the E-I system. Cost is almost a linear function of performance capabilities desired in the system.

Second, they are exceptionally versatile. The E-I system can be expanded simply by adding appropriate modules. Typical systems presently in use measure resistance, capacitance, DC and AC voltages, DC/DC ratios, AC/DC ratios, AC/AC ratios and combinations of these. Measurements to four or five digits can be visually displayed and printed out at rates up to five readings per second. Operation can be semi- or totally automatic with go/no go comparison of values and programmed readout at periodic intervals. Scanners can be provided for scanning thousands of single and multi-wire input channels. In brief, the E-I system has an extensive scope of operating capability.

Third, E-I systems provide unmatched reliability. Where practicable, circuits are totally transistorized. The use of etched, plug-in circuit boards, and modular internal construction make maintenance checks and in-plant repairs easy.

Typical E-I system for evaluating components—includes 100 channel input signal scanner. Can digitize DC voltage, resistance, AC voltage and DC/DC voltage ratio analogs. Digital equivalents are recorded on strip printer for "quick look" data and on punch paper tape for additional data reduction by digital computer.

Lower cost, maximum versatility and greater reliability—if you want these advantages in your component test system, contact your nearest E-I representative. He can give you complete information or answer any specific questions you may have.

Electro Instruments, Inc.

3540 AERO COURT
SAN DIEGO 11, CALIF.

The new Burnell & Co. MT 34 and MT 35 microminiature Kernel toroidal inductors are made to order for the engineer who isn't content with outer husk solutions but gets right to the core of second generation missile communication problems.

MT 34 microminiature Kernels can be supplied with inductances up to 500 mhys and the Kernel MT 35 is available in inductances up to 200 mhys. MT 34 Kernels are recommended for frequencies to 30 kcs and the MT 35 is applicable to frequencies up to 200 kcs depending on inductance values. Q for the MT 34 is greater than 55 at 25 kc and for the MT 35 more than 60 at 100 kcs.

Size of the MT 34 and MT 35 is .417" OD x .215", spacing between leads .3" x 1" L with a weight of .06 ounces.

The new microminiature Burnell MT 34 and MT 35 Kernels provide maximum reliability as well as considerable economy in printed circuit use. Completely encapsulated, the Kernels will withstand unusually high acceleration, shock and vibration environments.

Write for special filter bulletin MTF to help solve your circuit problems.

*missiles

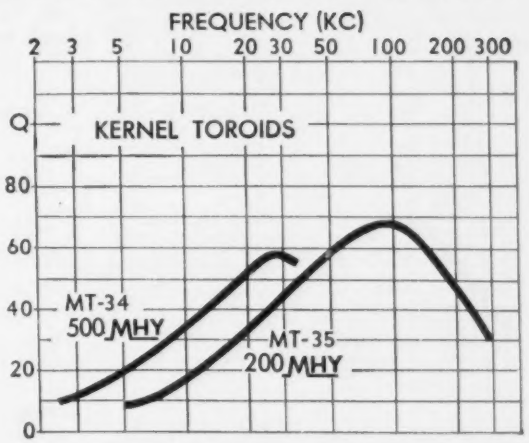

Burnell & Co., Inc.

PIONEERS IN microminiaturization OF
TOROIDS, FILTERS AND RELATED NETWORKS

EASTERN DIVISION
Dept. E-24
10 PELHAM PARKWAY
PELHAM, N. Y.
PELHAM 8-5000
TELETYPE PELHAM 3633

PACIFIC DIVISION
Dept. E-25
720 MISSION ST.
SOUTH PASADENA, CAL.
RYAN 1-2841
TELETYPE: PASACAL 7578

electronics
September 11, 1959, Vol. 32, No. 37

Published weekly, with an additional BUYERS' GUIDE and REFERENCE Issue in mid-June, by McGraw-Hill Publishing Company, Inc., James H. McGraw (1860-1948) Founder.

Executive, Editorial, Circulation and Advertising Offices: McGraw-Hill Building, 330 W. 42 St., New York 36, N. Y. Longacre 4-3000. Publication Office: 99-129 North Broadway, Albany 1, N. Y.

See panel below for directions regarding subscriptions or change of address. Donald C. McGraw, President; Joseph A. Gerardi, Executive Vice President; L. Keith Goodrich, Vice President and Treasurer; John J. Cooke, Secretary; Nelson L. Bond, President, Publications Division; Shelton Fisher, Senior Vice President; Ralph B. Smith, Vice President and Editorial Director; Joseph H. Allen, Vice President and Director of Advertising Sales; A. R. Venezian, Vice President and Circulation Coordinator.

Single copies in the United States, U. S. possessions & Canada 75¢; $1.50 for all other foreign countries. Buyers' Guide in the United States, U. S. possessions & Canada $3.00; all other foreign $10.00. Subscription rates—United States and possessions, $6.00 a year; $9.00 for two years; $12.00 for three years. Canada, $10.00 a year; $16.00 for two years; $20.00 for three years. All other countries, $20.00 a year; $30.00 for two years; $40.00 for three years. Second class postage paid at Albany, N. Y. Printed in U.S.A. Copyright 1959 by McGraw-Hill Publishing Co., Inc.—All Rights Reserved. Title registered in U. S. Patent Office. BRANCH OFFICES: 520 North Michigan Avenue, Chicago 11; 68 Post Street, San Francisco 4; McGraw-Hill House, London E. C. 4; 85, Westendstrasse, Frankfurt/Main; National Press Bldg., Washington 4, D. C.; Six Penn Center Plaza, Philadelphia 3; 1111 Henry W. Oliver Bldg., Pittsburgh 22; 55 Public Square, Cleveland 13; 856 Penobscot Bldg., Detroit 26; 3615 Olive St., St. Louis 8; 350 Park Square Bldg., Boston 16; 1301 Rhodes-Haverty Bldg., Atlanta 3; 1125 West Sixth St., Los Angeles 17; 1740 Broadway, Denver 2; 901 Vaughn Bldg., Dallas 1. ELECTRONICS is indexed regularly in The Engineering Index.

Subscription: Address correspondence to: Fulfillment Manager, Electronics, 330 W. 42nd St., New York 36, N. Y. Allow one month for change of address, stating old as well as new address, including postal zone if any. Subscriptions are solicited only from persons engaged in theory, research, design, production, management, maintenance and use of electronics and industrial control components, parts and products. POSITION and COMPANY CONNECTION must be indicated on subscription orders.

Postmaster: please send form 3579 to Electronics, 330 W. 42nd St., New York 36, N. Y.

Member ABP and ABC

SHOPTALK . . . editorial

BYLINES. In the publishing world, a "byline" is a line of type displayed at the beginning of an article telling who wrote the article. Most publications put bylines on articles written by full-time staff members only when the article has singular merit. Among editors and writers, bylines are important milestones in their professional progress.

Our special report, "Instruments for Design and Production," which appears on p 89, carries the byline of Associate Editor Bushor. The report has been in preparation for almost one year. It is one of the most comprehensive rundowns yet to appear on new developments and future trends in test instruments.

Although they get no bylines, this report could not have been written without the help of many of our friends in industry. Gathering material for this report, Bushor visited dozens of instrument manufacturers, contacted additional hundreds by mail. Manufacturers proudly gave details on the latest innovations in their products and freely discussed future design and marketing plans.

This close cooperation between ELECTRONICS magazine and the electronics industry at large enables us each week to bring you, the reader, the latest business and engineering news—accurately, in depth and detail, and in true order of importance. Such a job can only be done by a publication that is truly part of the industry it serves.

OFF THE BEATEN TRACK. Our editors frequently unearth important business news stories by diverging from the hard-pan trail followed by most industrial editors.

At a recent "Press Open House" held at Fort Monmouth by the Army Signal Corps, Associate Editor Mason's deeply probing questions to his hosts earned him a fast ride by staff car to Deal, N. J. There he got a peek at the Army's satellite tracking center.

The tracking center is America's eye on the sky. Unlike many other tracking centers, the Deal center is not restricted to one frequency band. It can, and does, monitor frequencies from 15 kc to 1,000 mc, switching between a half dozen high-gain antennas.

The center locked onto Sputnik I only two hours after it was launched, and has tracked every satellite launched since then. It is our first line of defense against any potentially hostile orbiting vehicles. For details on equipment now being installed at Deal, plus Mason's exclusive photographs, see p 40

Coming In Our September 18 Issue . . .

INDUCTIVE COMPUTER CIRCUITS. In designing any switching circuit which requires a passive time-measuring or storage device, most engineers instinctively turn to using a capacitance. According to William Carey of Minneapolis-Honeywell's Datamatic Division, inductance is at least as versatile a reactive parameter as is capacitance in time-measuring circuits when transistors are used for amplification. Carey proceeds to show a number of circuit configurations which back up his claim that inductive elements are deserving wider use in multivibrators, scalers and similar computer uses.

MORTAR POSITION PINPOINTER. In recent wars, one of the leading producers of casualties has been the deadly mortar. The modern army's answer to this is a new tactical radar system for pinpointing the location of enemy mortars and directing more accurate counterfire to knock them out. M. S. Yaffee, W. F. Smith and J. B. Skully of General Electric Co. describe the new mortar locator which detects the mortar shell in flight and computes the location of the enemy position. The system has a maximum range of 10,000 meters and presents the target data in a form which minimizes the time between location and counterfire.

SPRAGUE CUP TYPE

TANTALEX® CAPACITORS

now better than ever!

Sprague's NEW "Cup Type" Liquid-Electrolyte Sintered-Anode Tantalex Capacitors offer several major improvements in cup capacitor design: elimination of fluctuation in capacitance during operation; elimination of "early failures" from internal short-circuiting as sometimes occurs with other brands of cup capacitors; and large values of capacitance in small physical size. But there's more . . .

Rated for −55 C to +85 C operation without voltage derating (to +100 C with 15% derating), these capacitors provide equipment designers with long operating life, long shelf life, outstanding capacitance stability, and very low leakage currents.

Sprague "cup" capacitors are available in two series: Type 131D for industrial, communication, and general military equipment; Type 132D for the severe vibration requirements and close performance parameters of military aircraft and missiles. Type 131 D, moderately priced and furnished in the comparatively wide capacitance tolerance of −15, +75%, is especially suited for filter, coupling, and bypass applications where this wide tolerance is permissible. Type 132D is furnished as standard in the closer capacitance tolerances of −15, +20% and −15, +50%.

Complete data on Types 131D and 132D Capacitors is given in Engineering Bulletin 3710A. Write Technical Literature Section, Sprague Electric Company, 35 Marshall Street, North Adams, Massachusetts.

SPRAGUE®
THE MARK OF RELIABILITY

SPRAGUE COMPONENTS:

CAPACITORS • RESISTORS • MAGNETIC COMPONENTS • TRANSISTORS • INTERFERENCE FILTERS • PULSE NETWORKS
HIGH TEMPERATURE MAGNET WIRE • CERAMIC-BASE PRINTED NETWORKS • PACKAGED COMPONENT ASSEMBLIES

Now you can deep draw and bend molybdenum sheet at room temperature!

... with General Electric's new High-Ductility (HD) Molybdenum Sheet

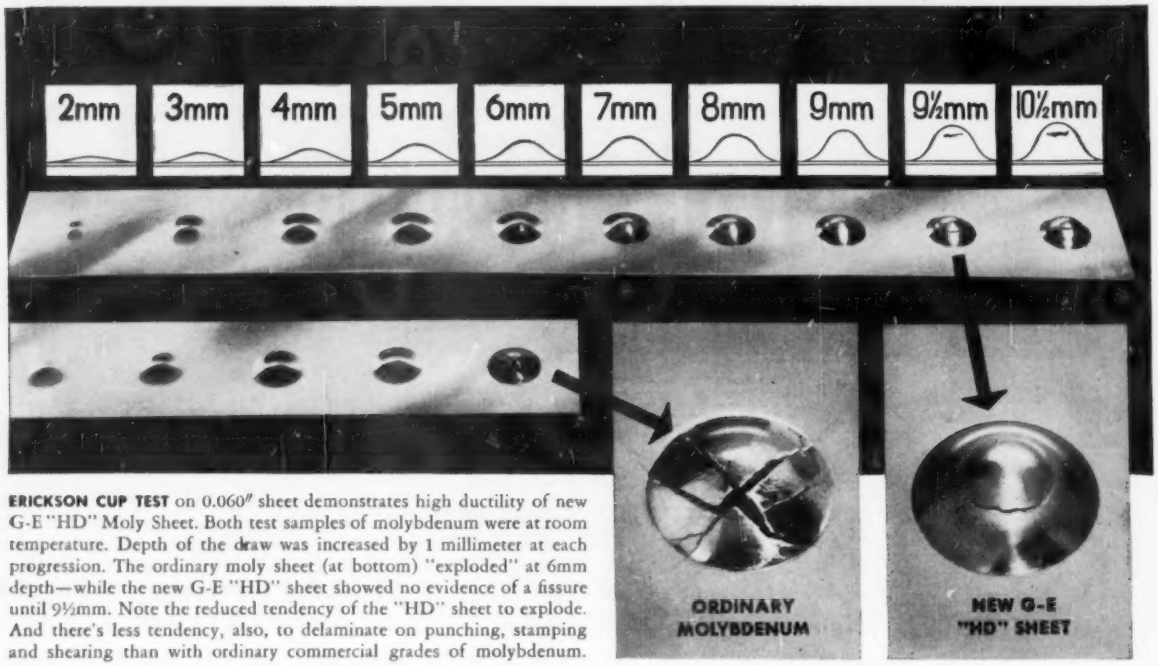

ERICKSON CUP TEST on 0.060″ sheet demonstrates high ductility of new G-E "HD" Moly Sheet. Both test samples of molybdenum were at room temperature. Depth of the draw was increased by 1 millimeter at each progression. The ordinary moly sheet (at bottom) "exploded" at 6mm depth—while the new G-E "HD" sheet showed no evidence of a fissure until 9½mm. Note the reduced tendency of the "HD" sheet to explode. And there's less tendency, also, to delaminate on punching, stamping and shearing than with ordinary commercial grades of molybdenum.

DRAW IT! FORM IT! PUNCH IT!—all without preheating! General Electric's new "HD" Moly Sheet can take it—and you can do all these operations in thicknesses previously impossible . . . or requiring up to 1000°F preheating. Even in cases where small amounts of heat may be needed, it's always less than with ordinary molybdenum sheet.

TIME SAVER, MONEY SAVER! The improved ductility of General Electric's new "HD" Molybdenum Sheet is of particular significance in sheet thicknesses of 0.020″ to 0.125″—as used in electronic tubes and semiconductor diodes, rectifiers and similar products. It has a high melting point (2622°C, 4752°F), low vapor pressure, and excellent strength at elevated temperatures. So it will be of great value to any company using refractory metals.

PLAN ON G-E "HD" SHEET Available in commercial quantities, so there's no better time than right now to get all the facts about this new kind of molybdenum. Write: General Electric Co., Lamp Metals and Components Dept. E-9, 21800 Tungsten Road, Cleveland 17, Ohio.

BENDS WITHOUT CRACKING . . . EVEN WITH NO PREHEATING!

Ordinary 0.060″ thick molybdenum broke at a 20° bend (see photo at left). The G-E "HD" sheet of same thickness shows no sign of cracking at 90°. Actually this new G-E Moly Sheet is so ductile you can bend it up to 180° without damage!

Progress Is Our Most Important Product

GENERAL ELECTRIC

READ

RADAR ECHO AUGMENTATION

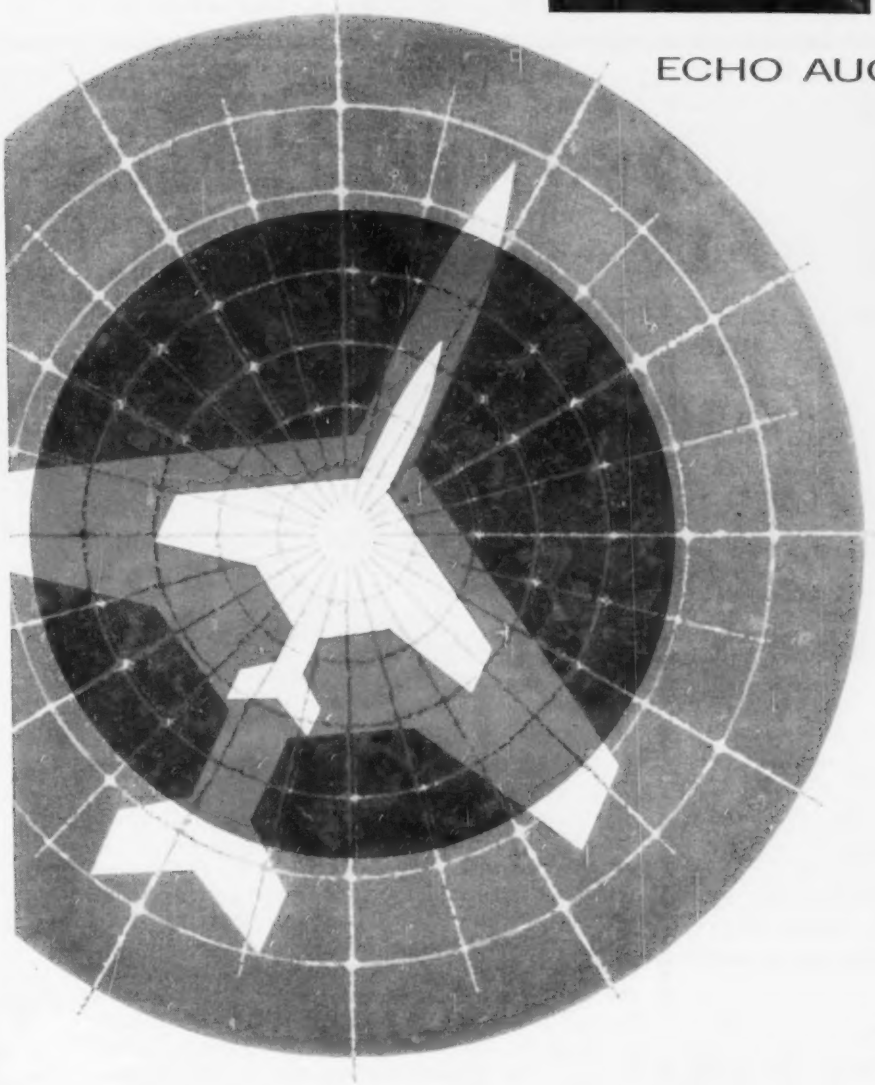

Small in size but large in application, READ was designed and developed by Temco Electronics. Used in small target drones, READ makes the craft appear as large as a potential enemy bomber. The greatly augmented image permits very accurate long range tracking of aircraft and missiles. As an aid in traffic control, READ reduces the possibility of mid-air collision. READ is another example of Temco Electronics development of its own proprietary products, in addition to its participation in weapons systems development.

Many excellent engineering and scientific positions are now open in this and other Temco programs. We invite your inquiry.

TEMCO ELECTRONICS

A division of TEMCO AIRCRAFT CORPORATION • DALLAS 22, TEXAS

BROAD

with these convenient, precision

NEW AMPLIFIER!

Just clamp on probe and read current instantly!

hp 154A Voltage/Current Dual Channel Amplifier

SPECIFICATIONS

(When plugged into -hp- 150A/AR Oscilloscope)

CURRENT CHANNEL

Band Pass:	50 cps to 8 MC.
Sensitivity:	10 calibrated ranges, 1 to 1,000 ma/cm, 1, 2, 5, 10 sequence. Accuracy ± 5%. Vernier between steps (extends 1,000 ma/cm range to at least 2,500 ma/cm).
Max ac Current:	10 amperes rms 20 KC and above. Below 20 KC core saturation reduces current capability proportional to frequency.
Max dc Current:	Direct current to ½ amp has no appreciable effect.
Input Impedance:	Approx. 0.01 ohm shunted by 0.8 uh.

VOLTAGE CHANNEL

Band Pass:	dc coupled: dc to 10 MC, 0.035 μsec rise time. ac coupled: 2 cps to 10 MC, 0.035 μsec rise time.
Sensitivity:	9 calibrated ranges, 0.05 to 20 v/cm; 1, 2, 5, 10 sequence. Accuracy ± 5%. Vernier between steps.
Input Impedance:	1 megohm (nominal), 30 uuf shunt.

GENERAL

Vertical Presentation:	(1) Either voltage or current signal continuously or (2) voltage and current signals sampled at 100 KC or on alternate traces.
Vertical Position:	Each channel individually adjustable.
Price:	$430.00 (includes current probe).

The new hp 154A's exclusive "clamp-around" probe permits fast, direct measurement of current from 50 cps to 8 MC, 1 ma to 15 amperes (peak-to-peak) *without breaking into the circuit, loading, or voltage drop due to resistor insertion.* Here is a time-saving convenience feature of real significance in the investigation of transistors, logic circuits and other measurements where current information is of prime importance.

In addition, the 154A — actually two instruments in one—makes possible swift, simple and direct comparison between voltage and current waveforms. In this comparison service, one section of the 154A reads current while the other reads voltage in a manner identical with other hp voltage indicating instruments. Comparison is achieved by electronic channel switching—through alternate sweeps or 100 KC chopping. Either of the 154A's dual channels may also be used individually.

hp now offers better-than-ever service

EN

the utility of your 150 A/AR oscilloscopes

amplifiers and accessories

152B Dual Trace Differential Amplifier. New plug-in amplifier providing differential input and dual traces electronically switched between A and B channels at either 100 KC or on alternate sweeps. Sensitivity range 0.05 v/cm to 50 v/cm, input attenuator with 9 calibrated ranges in 1, 2, 5, 10 sequence and vernier. $250.00.

153A Very High Gain Amplifier. New plug-in permitting 150A to be used for many direct measurements from transducer without *preamplification*. Pass band dc to 500 KC, sensitivity 1 mv/cm to 125 v/cm, balanced input on all ranges. 15 calibrated ranges in 1, 2, 5, 10 sequence, 1 mv/cm to 50 v/cm; plus vernier. $125.00.



151B High Gain Amplifier. For 150A high gain unit with 5.0 mv/cm sensitivity, frequency response dc to 10 MC. 12 calibrated ranges on 1, 2, 5, 10 sequence, 5 mv/cm to 20 v/cm; accuracy ± 5%. Vernier adjustment. 1 megohm input impedance with 31 uuf shunt. Pass band rise time 0.035 μsec. Has 2 BNC terminals. $200.00.



196A Oscilloscope Camera. All new, most useful scope camera ever. Full-size, distortion free pictures; full picture area may be scaled. Simple multiple exposures; with one hand move lens through 11 detented positions. Pictures sharp, clear, compare to CRT resolution. Professional bellows prevents light leaks; easy tab pulling; set f-stop and shutter without removing camera from scope; mount on scope with one hand. Employs Polaroid® Land Camera back, new *flat* Wollensak 3" f/1.9 lens. Wt. 9 lbs. $425.00.



AC-115A Oscilloscope Testmobile. For 150 series oscilloscopes but fits others. 4" rubber tired wheels, heavy chrome tube construction, tilts 'scope to 30° in 7½° increments, folds for storage, shipping. $80.00 AC-116A Storage Unit fastens to AC-115A, holds 150A plug-ins or AC-117A Accessory Drawers. AC-116A, $22.50. AC-117A, $10.00.

Data subject to change without notice. Prices f.o.b. factory

HEWLETT-PACKARD COMPANY

1002A Page Mill Road • Palo Alto, California, U.S.A.
Cable "HEWPACK" • DAvenport 5-4451
Hewlett-Packard S.A., Rue du Vieux Billard No. 1, Geneva, Switzerland
Cable "HEWPACKSA" • Tel. No. (022) 26.43.36

NOW! IN EUROPE!

In May, 1959, Hewlett-Packard S.A. was established in Geneva (a branch has since opened in Frankfurt am Main) offering technical sales and engineering help and information. Previously established relationships with representatives in other parts of Europe of course continue. In addition, there is a new - - warehouse in Basel stocking instruments and parts, and an - - factory near Stuttgart will soon be producing - - instruments for customers throughout Europe.

to our customers in Europe!

NATO SELECTS EIMAC KLYSTRONS TO POWER EUROPE'S LARGEST TROPO-SCATTER NETWORK

One and ten kilowatt amplifiers in NATO's continent-spanning tropo-scatter system will be Eimac Amplifier Klystrons. Since Eimac Klystrons first made large-scale tropospheric communications possible in 1954, they've become famous for reliability in all major tropo-scatter networks: Pole Vault, Dew Line, Texas Towers, White Alice, Florida-Cuba TV. Individual Eimac Klystrons have logged more than 35,000 hours continuous air time in tropo-scatter service.

Exclusive design features make Eimac Klystrons outstanding for tropo-scatter. Extra-wide frequency tuning is achieved with one set of tuning cavities. Inductive tuning achieves uniform bandwidth plus greater broad-banding by external cavity loading. Eimac's external cavity design lowers original cost, and replacement cost is lower since tuning circuitry is purchased just once.

One wide range load coupler covers the entire frequency range. Eimac's series connected body magnets permit use of one power supply, one control for body magnets.

Eimac Klystrons will be used in NATO installations. Proved Eimac reliability will aid in safeguarding the security of all free European nations.

EITEL-McCULLOUGH, INC.

Eimac®

San Carlos • California

ELECTRONICS NEWSLETTER

INSTRUMENT MAKERS in both military and commercial markets are making more and more of their own small components. Reason: They need better electrical characteristics plus reliability in quantities often too small for component manufacturers to produce at a low unit cost. Plant visits reveal that such specially made units include capacitors, wire-wound resistors and transformers. Meanwhile, GE disclosed that it is undertaking a two-year million-dollar effort, including an addition to its Columbia, S. C. plant, to produce a new family of capacitors for missile use that will have a failure rate of only one in 100,000. Current failure rate is about one in 1,000.

MIDAS SATELLITE will have infrared detectors to detect rockets or missiles at takeoff, says Herbert York, Pentagon director of research and engineering. DOD feels that this would be an improvement over ground-based detection system. York also said DOD is breaking down systems approach to military space programs, separating booster work from payload development. Such separation gives greater recognition to the work of electronics companies. Idea is to package what's best from electronics point of view and still get better integration with booster program.

Thermoelectric generators hold great promise as primary sources of power for aircraft and rockets of the future. This statement was not news when it was made recently to ELECTRONICS. But what was noteworthy was the fact that it came from a top engineer with an aircraft company who said his firm is pushing an R&D program.

TRANSISTORIZED SONAR TRAINING AID developed by ITT Laboratories teaches Navy sonar trainees to distinguish submarines from false targets. It reproduces exactly the echoes from different underwater objects. Gear records sonar searches by pulse amplitude modulation (pam) time division, f-m frequency division and a-m frequency division multiplexing onto 14-track magnetic tape. Stored data may be played back on 10 trainee-operated sets, each monitored by an instructor at master console. Equipment was produced under a $1.5-million contract from Naval Training Devices Center, Port Washington, N. Y., and has been installed at Key West, Fla., and San Diego, Calif., Navy training stations.

Minuteman guidance system is said by one source to involve 8,000 semiconductor diodes in the bird itself, 25,000 in ground-based gear.

NAVY THERMOELECTRIC EXPERIMENTS will be carried out with a new three-purpose device to be built by Westinghouse for BuShips. A thermoelectric air conditioner, space heater and refrigerator-freezer will be combined into one system. Purpose: to test the suitability of thermoelectricity for shipboard air conditioning and refrigeration. System's three components will be built up of identical thermoelectric elements, or modules; these can be individually removed and replaced, and can serve as building blocks for a larger system. Westinghouse research v-p S. W. Herwald says the Navy contract is "indicative of the rapid progress now being made in the whole broad field of thermoelectricity, both for refrigeration and for electric power generation."

Nearly 190 presentations have been scheduled for 60 sessions of the 14th and biggest Annual Instrument-Automation Conference and Exhibit of the Instrument Society of America in Chicago, Sept. 21-25.

ELECTRONIC CONTROLS for machine tools are already important in the planning of European industry (ELECTRONICS, p 13, Oct. 31, '58). Now comes word that Britain's EMI Electronics, one of many firms in the growing market, this fall is taking a 25-ft trailer fitted out as a modern workshop to France, Belgium, Holland, West Germany, Switzerland and Italy, and hopes to take it to Moscow next year. Exhibit includes a Kearney and Trecker milling machine which can, with punched tapes, produce items from a two-dimensional template to a three-dimensional die. Meanwhile, Britain's Board of Trade released figures that indicate British automation progress: Deliveries by makers of instruments and industrial control gear increased 9 percent between 1956 and 1958. In the first five months of 1959 deliveries of control equipment, including computers, were up 5 percent over the previous year.

Third International Conference on Medical Electronics is being planned for late next year in London by the British Institution of Electrical Engineers. Exhibition is planned simultaneously.

SAGE-CONTROLLED AIR TRAFFIC is under study by The Mitre Corp., air defense engineering systems adviser. Idea is that Sage centers might be used simultaneously for military purposes and in civilian air traffic control, saving the cost of an entirely separate system. Technical feasibility of using CHARM (CAA High Altitude Remote Monitors) will soon be reported to government agencies. Second phase, dubbed Project SATIN (Sage Air Traffic Integration), used New England experimental Sage facilities for evaluation of air traffic control application. Meanwhile, Mitre's Boston area facilities are being augmented with an IBM 7090 and a solid-state experimental Sage computer.

SILICONE NEWS from Dow Corning

As Environments Grow Tougher

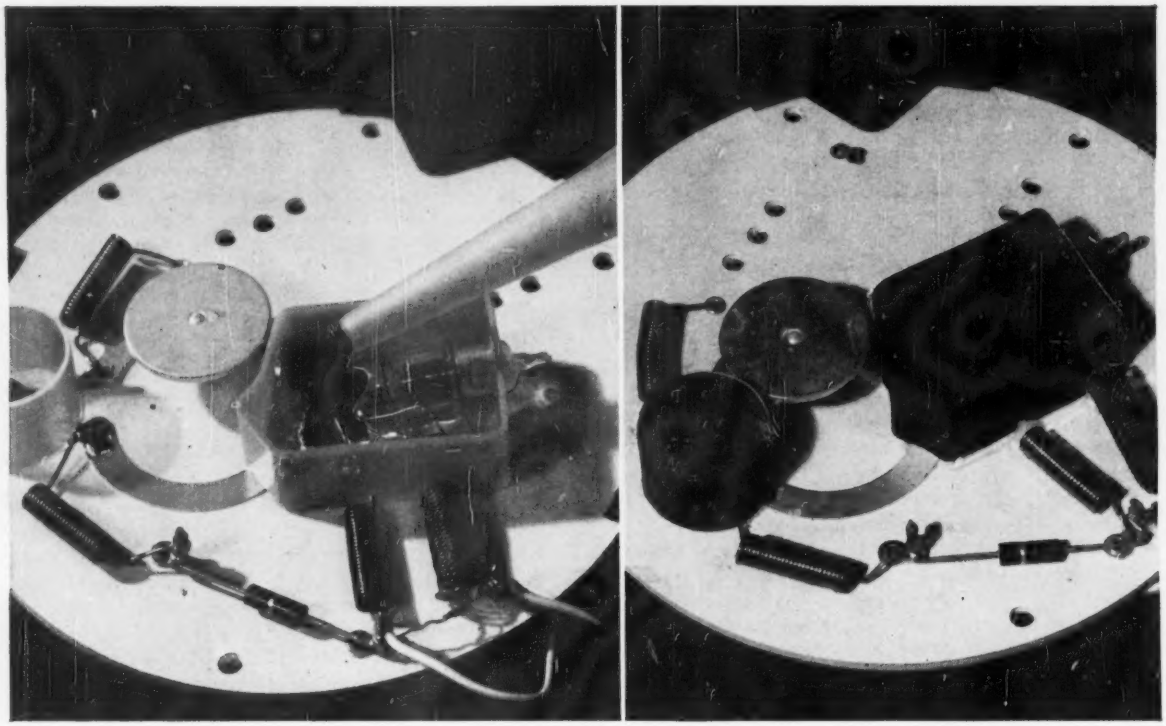

SILASTIC RTV Supplies Both Physical and Electrical Protection

The ideal encapsulating material should prevent mechanical damage to sub-assemblies and at the same time improve electrical properties. It should retain these protective qualities in all operating environments and put no stress on delicate parts. Just such a material is Silastic® RTV, the Dow Corning silicone rubber that vulcanizes at room temperature.

Take the case of the Radio Sondes manufactured by the General Instrument Corporation, Newark, N.J. These meteorological instruments linked to integral transmitters are designed to be launched from aircraft at altitudes up to 60,000 feet and speeds up to 565 knots. This means reduced air pressure and a definite hazard of arcing and corona due to the high potentials involved. It also means slipstream shock and vibration at launch.

As shown in the photos, critical areas of these Radio Sondes are encapsulated with Silastic RTV, applied with a calking gun into reusable retainer rings. By encapsulating the most vulnerable areas with Silastic RTV, excellent protection is achieved with no degradation of power factor.

Silastic RTV is easy to apply, has good dielectric and physical properties, and resists moisture, arcing, corona, and ozone. Rapidly changing ambients will not cause Silastic RTV to put excessive stress on fragile parts . . . it remains resilient and soaks up shock. Silastic RTV is available in different consistencies, set-up time can be varied from minutes to hours, depending upon the RTV system.

Typical Properties of Silastic RTV

- Temperature range . .(—70 to 260 C) —100 to 500 F
- Dielectric strength, volts/mil ..... 300 to 500
- Surface resistivity at 50% relative humidity, ohms ..... 2.8×10^{13}
- Dielectric constant, 10^6 cycles per second 2.96
- Dissipation factor, 10^6 cycles per second ... 0.003
- Moisture absorption after 7 days at room temperature, % ..... +3 to +5

CIRCLE NO. 247 READER SERVICE CARD

Your nearest Dow Corning office is the number one source for information and technical service on silicones.

first in silicones

Dow Corning

...silicones provide required service

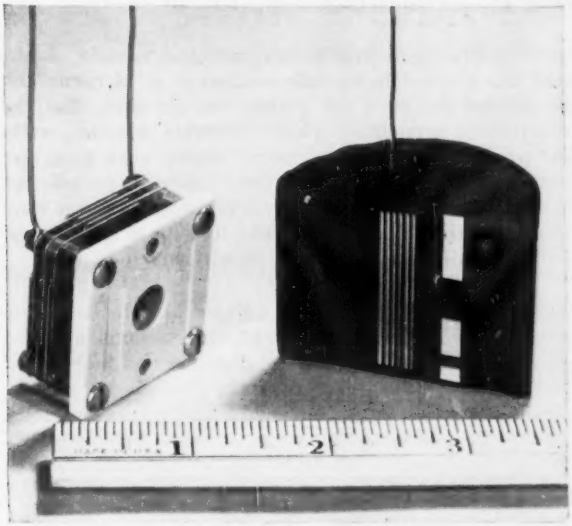

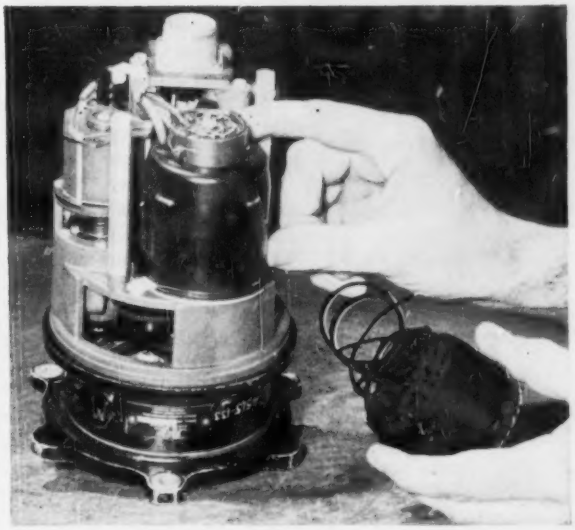

Solventless Resin For Top Heat Stability

When you need a rigid potting or encapsulating material, make sure the resin you choose is one that will keep its properties under adverse conditions. Dow Corning solventless silicone resins will withstand temperatures above 260 C (500 F). With no solvent to evaporate, they set up to a continuous bubble-free mass. The capacitor in the picture is a good example. After potting with one of these thermoset materials, it was sawed in half . . . notice the excellent void-free fill between plates. Solventless silicone resins form clear, tough solids; they accept a variety of fillers. Catalyzed pot life is over 6 months.

CIRCLE NO. 248 READER SERVICE CARD

A Varnish With Greater Heat-Resistance

Dow Corning 997 Varnish permits operation at temperatures up to 250 C . . . gives electronic and electrical equipment protection against overloads, moisture, many chemicals, corrosive atmospheres and other hazards.

The unit pictured is a servo motor that actuates controls in aircraft automatic pilots. Insulated throughout with high temperature materials, and dipped in 997 Varnish, such motors have proven much more reliable operation in United Airlines planes . . . running as long as 5 years without need for replacement, as against scheduled replacement after 1000 hours for Class A insulated motors.

CIRCLE NO. 249 READER SERVICE CARD

Highly Stable Diffusion Pump Fluids

Dow Corning silicone diffusion pump fluids resist oxidation even when exposed to air *at operating temperatures*. They won't decompose into gums and tars . . . can be cycled countless times. They recover far faster than organics and have very short pump-down times.

Silicone fluids produce vacua in the range of 10^{-5} to 10^{-7} mm. of mercury, are chemically inert, non-corrosive, non-toxic, free from impurities.

Shown are vacuum pump jet assemblies that were tested to breakdown on various pump fluids. The pump operating on Dow Corning fluids still had not broken down after 1,100 cycles, with exposure to air between cycles!

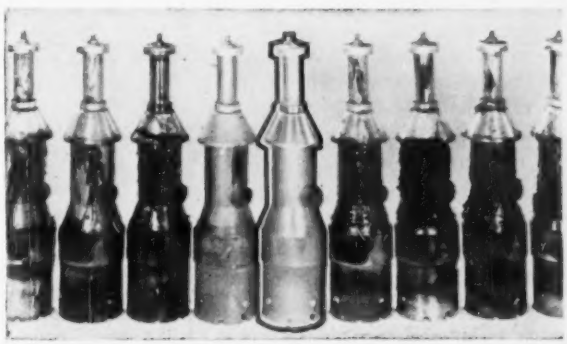

CIRCLE NO. 250 READER SERVICE CARD

CORPORATION MIDLAND, MICHIGAN

branches: ATLANTA BOSTON CHICAGO CLEVELAND DALLAS LOS ANGELES NEW YORK WASHINGTON, D.C.

COMPLETE LINE + FAST SERVICE = HIPERSIL CORES

Westinghouse stocks all types and sizes of Hipersil cores in three locations to serve you better

COMPLETE LINE includes the new EIA, RS-217 standard sizes.

- Type C: 12,4,2 and 1 mil sizes, in single- and 3-phase, from a fraction of an ounce to 300 pounds.
- Ring Cores: with new polyclad treatment—assure best magnetic performance of any Epoxy resin-coated core ready to receive windings.
- Special Cores: to any specification and shape requirement—rectangular, triangular and others.

FAST SERVICE is assured by complete stocks at Greenville, Pa.; Boston, Mass.; and Los Angeles, Calif.

Performance of Hipersil® cores in "iron-core" components is guaranteed to meet or exceed specifications.

For more facts, write for Price List 44-520 and Descriptive Bulletin 44-550 to Westinghouse Electric Corporation, P.O. Box 868, Pittsburgh 30, Pa. J-70920

YOU CAN BE SURE...IF IT'S
Westinghouse

WATCH "WESTINGHOUSE LUCILLE BALL-DESI ARNAZ SHOW" CBS TV FRIDAYS

WASHINGTON OUTLOOK

WASHINGTON—THE ELECTRONICS INDUSTRY has won the first round in its battle against the aircraft industry's petition to the Labor Dept. that all electronics companies with missile and plane contracts be required to pay the same Walsh-Healey Act minimum wage as the aircraft makers.

In an upcoming survey of wages paid in aircraft and missile plants, the Labor Department has decided to exclude producers of airborne and ground electronic equipment designed for planes and missiles. But the survey will cover electronics companies which assemble missiles, build missile airframes and produce missile nose cones. Among such firms are Sperry, Hughes, Raytheon, Philco, GE and Avco. Labor Dept. officials stress that inclusion of such companies in the survey doesn't mean electronics firms with prime contracts for missile end-items will be covered by the same Walsh-Healey minimum wage as the aircraft industry.

The survey will be made under the aircraft unions' plea to boost the industry's nine-year-old $1.05 minimum pay rate. The unions and the Aerospace Industries Assn. had petitioned the department to include all electronics companies in missile and aircraft production in the survey.

Electronics Industries Assn., in opposing the AIA and aircraft unions, petition, claimed a wage differential of at least 50 cents between electronics plants and the higher-wage aircraft industry. The estimate included all types of electronics manufacturing. EIA conceded that the same differential does not prevail when nondefense electronics workers are excluded, argued that a "substantial wage differential" nevertheless exists between the two industries.

- **A separate Walsh-Healey minimum wage determination**—the first one ever—for the electronics industry as a whole will be considered in the near future. If electronics companies with prime contracts for missile end-items eventually escape Walsh-Healey coverage under the aircraft industry's wage rate, they will be covered by this survey.

  It will be at least another year before the missile wage rate issue is settled. The wage survey, which will begin shortly, must be followed by a public hearing at which AIA, EIA and the industries' unions will be heard prior to the final official decision.

  Meanwhile, the Labor Dept. is planning to meet with industry and union officials next month to discuss the makeup of the questionnaire to be sent to plants in the aircraft-missile wage survey.

- **Washington is making a reassessment** of the ambitious space exploration plans set up by NASA during its first year of existence. The purpose is to scale down the plans in view of what NASA administrator T. Keith Glennan calls "a full realization of the complexity of the technological problems facing us." The result is an indefinite postponement of the some 30 percent of the space-launching attempts scheduled for the year—notably interplanetary probes.

  From here on, the space agency will stress lunar probes. Glennan says NASA has "learned that we are not nearly as far advanced in space technology as we had thought or hoped." The ratio of successful launches to unsuccessful ones has not improved much in the past year.

  Major problem of the space explorers is still reliability. NASA is especially concerned about shortcomings in guidance, thrust control, telemetry and sensors of all types, will push hard on research in these fields.

OHMITE®
RHEOSTATS
WITH SPECIAL FEATURES
solve many difficult control problems

Ohmite offers not only industry's most complete line of *standard* rheostats but also rheostats with a wide variety of *special features*. Illustrated are only a few. All have the distinctive Ohmite design features: smoothly gliding metal-graphite brush; all-ceramic construction; insulated shaft and mounting; windings permanently locked in place by vitreous enamel. You will find the special rheostat feature you need in the dependable Ohmite line.

Two groups of four Ohmite taper-wound rheostats mounted in tandem, controlled by a single knob through a chain drive.

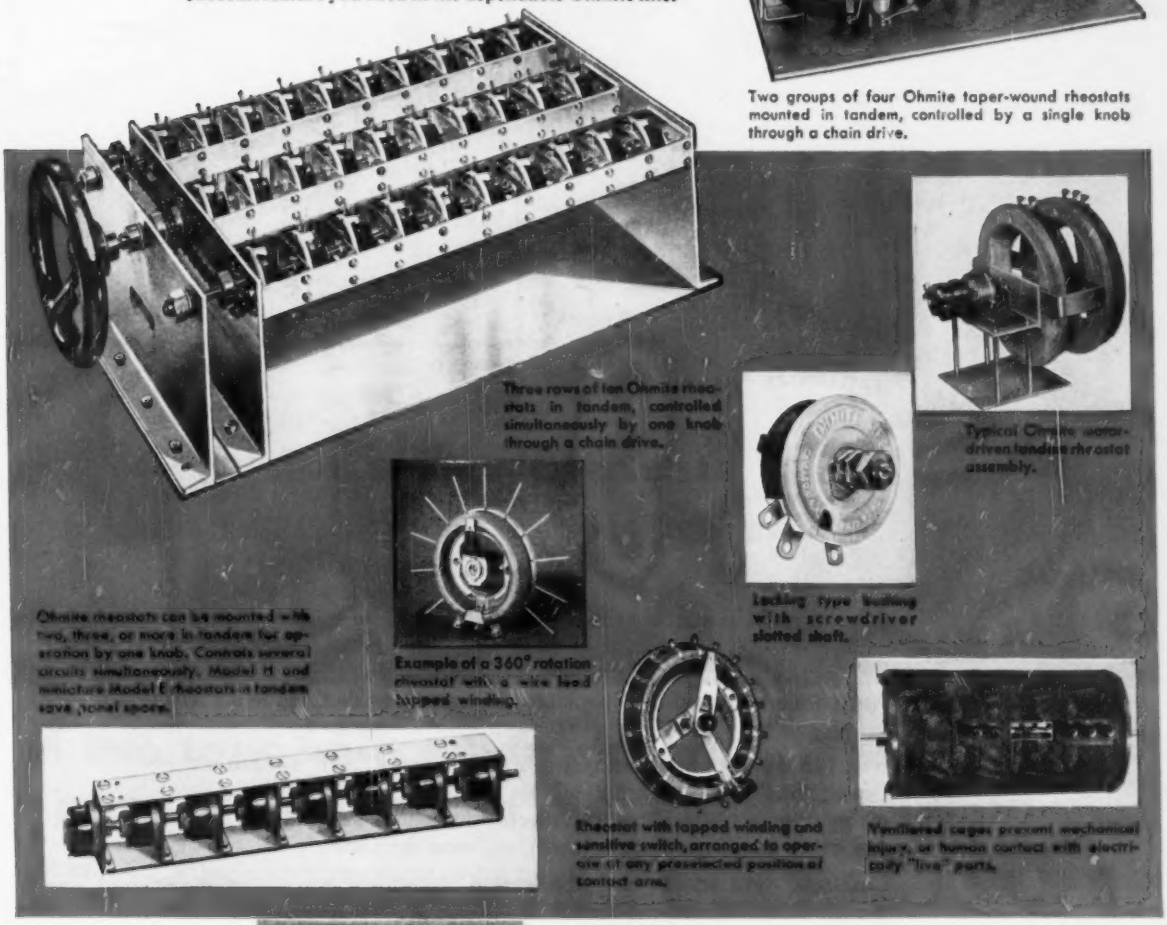

Three rows of ten Ohmite rheostats in tandem, controlled simultaneously by one knob through a chain drive.

Typical Ohmite worm-driven tandem rheostat assembly.

Locking type bushing with screwdriver slotted shaft.

Ohmite rheostats can be mounted with two, three, or more in tandem for operation by one knob. Controls several circuits simultaneously. Model H and miniature Model E rheostats in tandem save panel space.

Example of a 360° rotation rheostat with a wire lead tapped winding.

Rheostat with tapped winding and sensitive switch, arranged to operate at any preselected position of control arm.

Ventilated cages prevent mechanical injury, or human contact with electrically "live" parts.

Call on Ohmite for APPLICATION ENGINEERING SERVICE

Save valuable engineering time. Team up with Ohmite to solve your resistance problems. Ohmite engineers are resistance specialists. They can quickly analyze your needs and recommend the correct rheostat to fit your application.

Write on Company Letterhead for Catalog 58

OHMITE® Manufacturing Company
3610 Howard Street, Skokie, Illinois

Quality Components

RHEOSTATS RESISTORS TAP SWITCHES
RELAYS VARIABLE TRANSFORMERS DIODES
TANTALUM CAPACITORS R. F. CHOKES

New subminiature switch has bifurcated contacts

Now, for the first time, bifurcated contacts are available in a subminiature snap-action precision switch. Two points of contact provide increased reliability of milli-volt, milli-amp circuit control. Contacts are gold. Resistance is constant for the life of the switch. Switches are individually packaged in sealed double thickness plastic envelopes.

The 12SM4 is an addition to the MICRO SWITCH "SM" subminiature series. "SM" switches are available in 260 variations, with hundreds of different actuators and enclosures. For more information on this and other small snap-action switches, send for Catalog 63.

Catalogs, data sheets and application assistance are available on request from the MICRO SWITCH branch office near you. Consult the Yellow Pages.

MICRO SWITCH . . . FREEPORT, ILLINOIS
A division of Honeywell
In Canada: Honeywell Controls Limited, Toronto 17, Ontario

Honeywell
MICRO SWITCH Precision Switches

CIRCLE NO. 17 READER SERVICE CARD→

DU PONT

ENGINEERING FACTS ABOUT

TEFLON®

FLUOROCARBON RESINS

NUMBER E-5 IN A SERIES:
ELECTRICAL DESIGN
Component Insulation

In the toughest environments, TFE resins offer the utmost in electrical insulation

To meet the stringent requirements imposed on electrical components in a variety of industrial and defense uses, TEFLON fluorocarbon resins offer an unmatched combination of electrical properties. In aircraft generators, for example, where weight and space savings are vital, insulation of TFE resins provides the high power and low weight necessary for extreme miniaturization. In motors and generators for use in locomotives, TFE resins provide superior resistance to arcing, as well as high dielectric strength and excellent heat resistance. In circuit breakers, interrupting orifices made of TFE resins have the necessary arcing resistance, plus chemical inertness and resistance to thermal shock. In capacitors, films of TFE resins offer excellent insulation resistance even at high ambient temperatures, exceptional stability of capacitance, and permit savings in space and weight. In computers, printed circuit laminates made of TEFLON fluorocarbon resins assure low dielectric losses over the broadest range of frequencies and temperatures.

On the next three pages you will find more detailed information on some of the properties of TEFLON fluorocarbon resins and examples of how these unusual properties have been used to meet the most exacting design requirements.

OVER

TEFLON is Du Pont's registered trademark for its family of fluorocarbon resins, including TFE (tetrafluoroethylene) resins and FEP (fluorinated ethylene propylene) resins.

DU PONT — REG. U.S. PAT. OFF.

Superior electrical and make possible design improvements

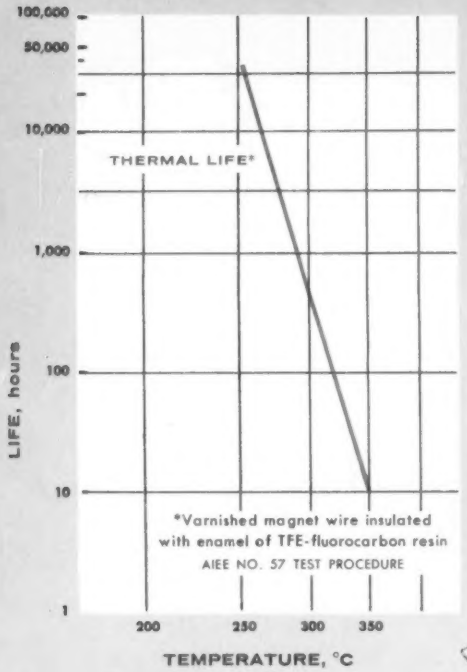

IN TRANSFORMERS

TFE resins offer exceptionally long insulation life at high temperatures

At their continuous service temperature of 260°C. (500°F.) the insulation life of TEFLON TFE resins is measured in years. The excellent heat-aging characteristics of TFE resins are the result of exceptionally low weight losses at elevated temperatures. Thermal-life tests on magnet wire (see chart at left) show that wire enameled with TFE resins had the highest thermal-stability rating of all insulation types tested. TFE resins can withstand elevated temperature conditions under which other plastic and elastomer insulations melt, char or disintegrate. The high thermal stability of TFE resins permits the construction of miniaturized components, with the resultant space and weight savings that are particularly important in air-borne applications.

(PHOTO COURTESY OF CHICAGO STANDARD TRANSFORMER CORP.)



The Class T transformer shown at left calls for 170°C. maximum operating temperature in an ambient of 100°C. To meet this requirement, layer insulation of TEFLON TFE resins and magnet wire enameled with TEFLON TFE resins are used. In addition, lead wire coated with TFE resins readily withstands the temperatures of encapsulation, eliminating costly rejects. The result is a reliable transformer for air-borne applications, small for its power rating.

Properties of capacitors using dielectrics of TFE resins

Dissipation Factor (−40° to 250°C.; 0 to 10,000 mc)	.0002
Dielectric Constant (−40° to 250°C.; 0 to 10,000 mc)	2.1
Dielectric Absorption (% charge reappearing 30 sec. after discharge)	0.02
Temperature Coefficient of Capacitance (Parts/million/°C.; 0-200°C.)	−300
Insulation Resistance at 100°C. (Megohms x microfarads)	100,000

(ROTATING ANTI-COLLISION LIGHT BY GRIMES MFG. CO., URBANA, OHIO)



(CAPACITOR BY POTTER COMPANY, CHICAGO, ILL.)

IN CAPACITORS

TFE resins used as high-temperature dielectrics provide outstanding stability...space, weight savings

Films of TFE resins used in capacitors offer unsurpassed insulation resistance at high temperatures, a low temperature coefficient of capacitance, a very low dissipation factor and outstanding capacitance stability on thermal cycling. The dielectric constant and dissipation factor of a TFE resin remain virtually unchanged over the broadest operating ranges of temperature and frequency (see table at left). Further, high-quality metalized films and flexible films of TFE resins as thin as ⅛ mil are now available, permitting a high degree of miniaturization . . . space and weight savings.

The motor of a rotating anti-collision landing light for the B-52 bomber required a phase-shifting capacitor (0.65 mfd. hermetically sealed), with a life of 500 hours at -65°F. followed by 500 hours at 300°F. ambient. Films of TEFLON TFE resins replaced another high-temperature dielectric with a resulting reduction of capacity drift from + 18% to -2%. At no increase in capacitor size, a 25°F. reduction in the mechanism operating temperature was thus achieved.

mechanical properties of TFE resins in wide variety of components

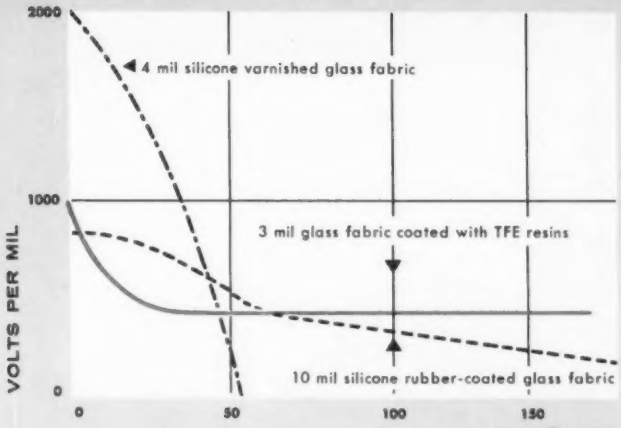

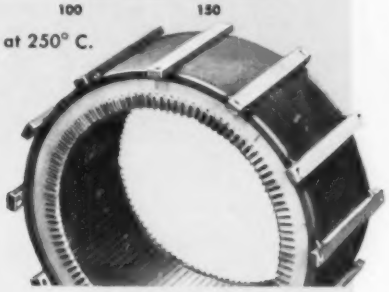

IN MOTORS AND GENERATORS

TFE resins provide mechanical ruggedness... maintain high dielectric strength after heat aging

Extreme miniaturization of aircraft alternators and generators, plus exposure to vibration and high temperatures, makes high demands on the insulation materials used. Slot liners of woven-glass fabric coated with TFE resins and magnet wire insulated with TFE resins offer the required mechanical ruggedness, heat resistance and dielectric properties after heat aging. The chart at left shows a comparison of dielectric strength vs. time aged at 250°C. (482°F.) for glass fabrics coated with TFE resins, against other commercially available Class H insulations. The low friction surface of slot liners made with TFE resins reduces rejects due to mechanical abuse of magnet wire in manufacturing and also reduces surface abrasion. The same properties—plus resistance to chlorinated cleaning solvents—are the reasons for the choice of TEFLON TFE-fluorocarbon resins for insulation in diesel electric generators.

The high-temperature aircraft alternator stator at left uses slot liners of glass fabric coated with TEFLON TFE resins. Superior dielectric and mechanical properties of TFE resins give windings maximum protection against vibration and the extreme heat generated at full load and high altitudes.

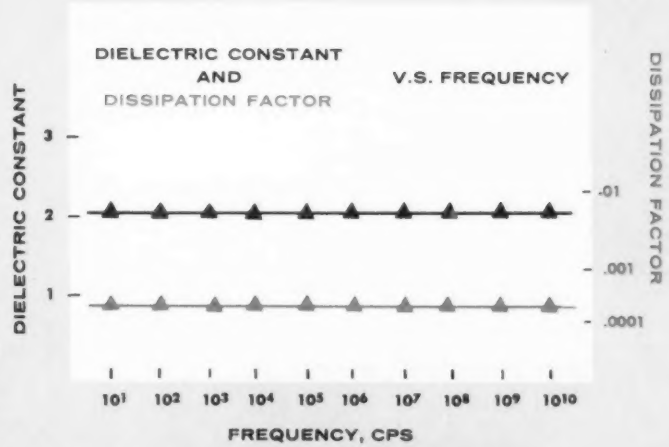

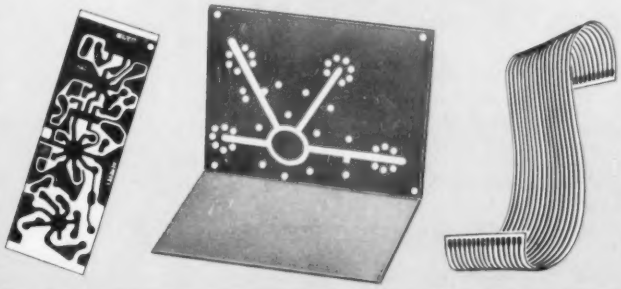

IN PRINTED CIRCUITS

TEFLON fluorocarbon resins provide exceptionally low attenuation at high frequencies

Printed circuit laminates of TEFLON fluorocarbon resins offer superior performance in applications where low dielectric losses at high frequencies and high temperatures are essential. Design problems are considerably simplified by the fact that the dielectric constant and dissipation factor do not vary with frequency (see chart at left), or with temperature. In fact, these electrical characteristics of TFE resins are essentially invariant from low audio frequencies to the highest microwave frequencies and from below -100°C. to above 260°C.

Additional design improvements are made possible by the use of TEFLON FEP-fluorocarbon resin as a bonding medium. For example, in a "strip-line" circuit a double sandwich is used to provide a ground plane on both sides of the circuit. The use of FEP resin as a bonding medium between the copper and TFE glass-fabric base laminate permits a two-fold reduction of attenuation at 5000 mc, plus much better surface-resistivity and moisture-resistance properties. Since TFE resins are unaffected by solder temperatures, printed circuits can be easily dip-soldered.

OVER

Insulation of TFE resins offers maximum reliability for reduced rejects... lower maintenance costs

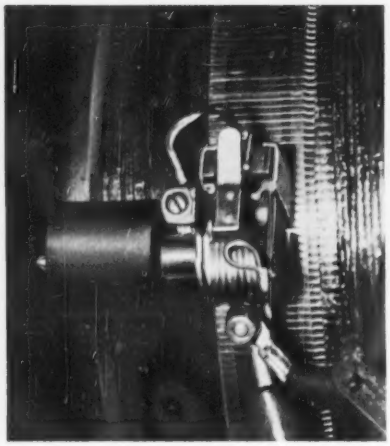

BRUSH-HOLDER SLEEVES of TEFLON TFE resins provide superior arcing resistance on railroad-type motor generators. Repeated flashovers, unavoidable in railroad service, have little effect on TFE resins, while former insulators blistered. Protective sleeves also tend to be self-cleaning. Easier handling of generators in the shop, together with longer service life of each sleeve of TFE resin, has made maintenance simpler and less costly.

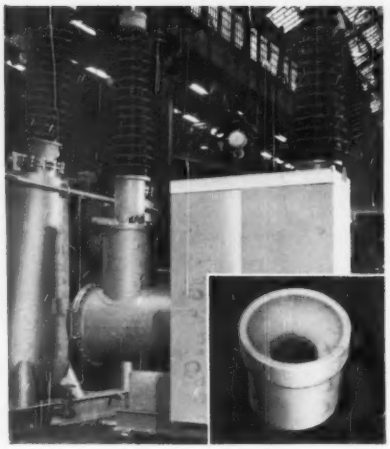

INTERRUPTING ORIFICES in this new 230-kv, 15,000 mva SF6 circuit breaker are made of a TEFLON TFE-fluorocarbon resin. Reasons for using this material involved a unique combination of properties offered by TFE-fluorocarbon resins; they are extremely resistant to arcing; produce negligible gas contamination; have high resistance to thermal shock; and are non-hygroscopic. (Photo courtesy of Westinghouse Electric Corporation)

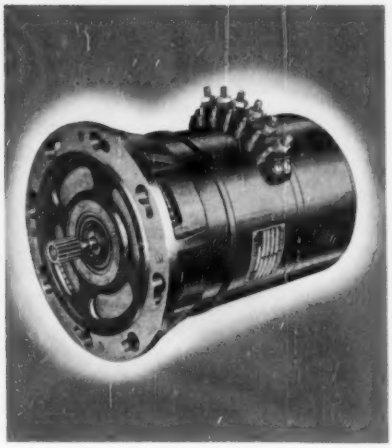

AIRCRAFT GENERATOR above is designed to operate continuously with winding temperature of 550°F. for 1,000 hours. Insulation of a TFE resin is used because it is regarded as the only available material with the required combination of properties: high dielectric strength in reasonably thin and flexible sections, heat-aging resistance to the thermal exposures encountered and excellent chemical stability. (Photo courtesy of Jack & Heintz, Inc.)

Whenever design specifications call for reduced size and weight, high stability, broad operating ranges of frequency, operation at extremes of temperature or other severe environmental conditions, insulation of TEFLON TFE-fluorocarbon resins is rapidly becoming a design standard. TFE resins offer an unmatched combination of high dielectric strength, exceptional resistance to heat aging, low power losses, resistance to arcing, mechanical ruggedness, chemical inertness and low-friction surface. In addition, a melt-processable TEFLON FEP-fluorocarbon resin is now available for greater flexibility of design.

The combination of properties offered by TEFLON resins makes possible savings during the manufacture of components, reduced inspection costs, fewer rejects, fewer service failures and lower maintenance costs. The advantage of increased *reliability* applies to all applications of TEFLON resins in electrical components. Even when ambient conditions are not extreme, the non-aging characteristics of TEFLON resins make possible longer service and storage life of equipment.

The preceding issues of "Engineering facts about TEFLON fluorocarbon resins" cover other aspects of electrical applications. They are available by writing to the address below at left. Please state the issues you wish to receive.

1. RF Properties
2. Wiring Reliability
3. High Temperatures
4. Printing and Potting

FOR MORE INFORMATION

If you would like further design and end-use information about Du Pont TEFLON resins, contact your supplier of TEFLON fluorocarbon resins (listed in the Yellow Pages under "Plastics—Du Pont"). For any unanswered technical questions about these resins, write to: E. I. du Pont de Nemours & Co. (Inc.), Advertising Dept., Room T-148, Nemours Bldg., Wilmington 98, Delaware.

In Canada: Du Pont of Canada Ltd., P.O. Box 660, Montreal Quebec.

TEFLON is Du Pont's registered trademark for its family of fluorocarbon resins, including TFE (tetrafluoroethylene) resins and FEP (fluorinated ethylene propylene) resins.

TEFLON®

FLUOROCARBON RESINS

DU PONT

REG. U. S. PAT. OFF.

BETTER THINGS FOR BETTER LIVING . . . *THROUGH CHEMISTRY*

The new concept of electronic equipment manufacture

*** A pleasant surprise:**

Made for everyday use

Wide range available

Modern techniques

Flow production

Automatic inspection

Easy servicing

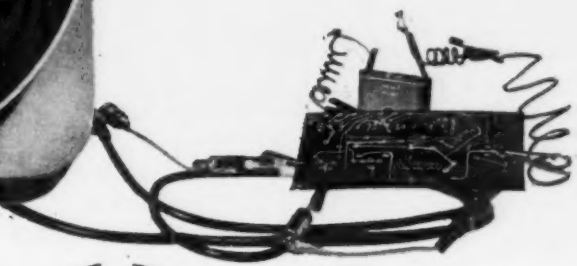

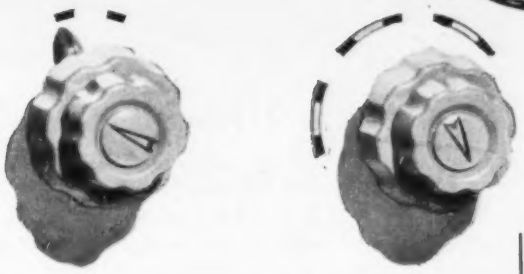

* Philips manufacturing plants have been completely retooled so as to produce a new, wide range of relatively inexpensive electronic measuring equipment.

Each instrument is in fact an electronic tool for everyday use in factory or laboratory: accurate, robust and reliable, easily serviced throughout the world.

It is not too much to say that Philips have applied a new philosophy to the production of this type of equipment.

For users now benefit from the marriage of a highly specialised knowledge of these instruments and their applications with an unequalled experience in flow-line production. Here in fact is another substantial contribution by Philips to industry and to research.

Broadband mV-Meter GM 6012

Measuring range: from 1 mV (full scale deflection) in 12 steps up to 300 V; dB scale −80 dB up to +52 dB (0 dB = 1 mW into 600 Ω)

Frequency range: 2 c/s – 1 Mc/s

Input impedance: 4 – 10 MΩ//20-10 pF

Overall accuracy from 20 c/s to 100 kc/s: 2.5%; elsewhere 5%

Mains supply: 110-245 V, 40-100 c/s

Built-in calibration voltages

Amplifier can be used separately; gain 35 dB

5" linear scale with mirror reading

The price – a pleasant surprise

Dependable **PHILIPS** *tools*

for the electronic industry

Sold and serviced by Philips Organizations all over the world

Further information will gladly be supplied by:

N.V. Philips Gloeilampenfabrieken, Eindhoven, the Netherlands

←CIRCLE NO. 20 READER SERVICE CARD

CIRCLE NO. 21 READER SERVICE CARD 21

How to get 55% over-all efficiency in transistorized 6-watt servo amplifier

HIGH-EFFICIENCY SERVO CIRCUIT REQUIRES . . .

- **no output transformer**
- **no center-tap motor winding**

Higher over-all efficiency than in a conventional Class-B push-pull amplifier is achieved in this servo by use of unfiltered rectified a-c for current supply voltage—with resulting reduction in size, weight and power supply requirements. This higher efficiency means greater transistor reliability, smaller heat sink and/or higher allowable ambient temperatures. Output will remain sinusoidal when amplifier is overdriven.



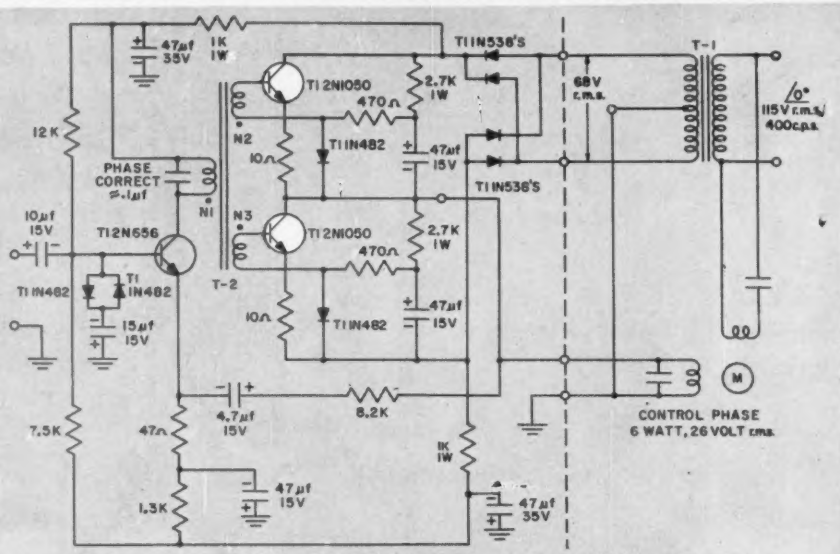

TRANSFORMERS

T-1 400 cps, 12-watt power transformer step-down 115 volt to 68 volt c.t.

T-2 400 cps, 65-mw driver transformer. Turns ratio N1: N2: N3 = 2: 1: 1
Primary Current = 10 ma d-c. Primary Inductance = 1.5 hy.

...with TI 2N1050 N-P-N silicon transistors!

Exclusive TI 2N1047 intermediate-power series now gives you maximum design flexibility plus high efficiency . . . all in a miniature package!

Consider the design flexibility made possible by the exclusive features of this series . . . 40 watts dissipation at 25°C case temperature . . . unique stud mounting for maximum thermal efficiency . . . 80- and 120-volt BV_{CEX} . . . 15-ohm R_{CS} . . . −65°C to +200°C operating and storage range . . . choice of beta spreads.

Apply TI's guaranteed specs to your design situations today. This use-proved series is available off-the-shelf — *at factory prices* — in 1-999 quantities from your nearby authorized TI distributor, and in production quantities from your TI sales office.

Write on your company letterhead for illustrated TI APPLICATION NOTES on the transistorized servo amplifier.

PARAMETER	TEST CONDITIONS	2N1047	2N1048	2N1049	2N1050	unit
		min. max.	min. max.	min. max.	min. max.	
BV_{CEX} Breakdown Voltage	$I_C = 250\ \mu a$ $V_{BE} = -1.5v$	80	120	80	120	v
BV_{EBO} Breakdown Voltage	$I_E = 250\ \mu a$ $I_C = 0$	10	10	10	10	v
I_{CBO} Collector Cutoff Current	$V_{CB} = 30v$ $I_E = 0$	15	15	15	15	μa
h_{FE} Current Transfer Ratio †	$V_{CE} = 10v$ $I_C = 200ma$	12 36	12 36	30 90	30 90	—
h_{IE} Input Impedance †	$V_{CE} = 10v$ $I_B = 8ma$	500	500	500	500	ohm
R_{CS} Saturation Resistance †	$I_C = 200\ ma$ $I_B = 40ma$	15	15	15	15	ohm
V_{BE} Base Voltage †	$V_{CE} = 15v$ $I_C = 500ma$	10	10	10	10	v

†Semiautomatic testing is facilitated by using pulse techniques to measure these parameters. A 300-microsecond pulse (approximately 2% duty cycle) is utilized. Thus, the unit can be tested under maximum current conditions without a significant increase in junction temperature, even though no heat sink is used. The parameter values obtained in this manner are particularly pertinent for switching circuit design and, in general, indicate the true capabilities of the device.

germanium and silicon transistors
silicon diodes and rectifiers
*tan*Ti*cap* solid tantalum capacitors
precision carbon film resistors
sensistor silicon resistors

TEXAS INSTRUMENTS
INCORPORATED
SEMICONDUCTOR-COMPONENTS DIVISION
13500 N. CENTRAL EXPRESSWAY
POST OFFICE BOX 312 • DALLAS, TEXAS

FINANCIAL ROUNDUP

Mass., N. J. Companies Merge

MERGER between **Robinson Technical Products,** Teterboro, N. J., and **High Vacuum Equipment Corp.**, Hingham, Mass., has been announced. Robinson has acquired all outstanding shares of HVEC through an exchange of stock. The Massachusetts company will be operated as a wholly-owned subsidiary of the New Jersey firm and all assets will be retained. Robinson manufactures metal mesh vibration mountings for electronic equipment as a proprietary product and holds several contracts with major manufacturers for this aspect of reliability. HVEC manufactures high-vacuum furnaces and associated equipment including electron beam welders, metallizers and vacuum pumps.

• **Telectro Industries Corp.,** Long Island City, N. Y., and its wholly-owned subsidiary, **Telectrosonic Corp.,** report combined sales rise of 70 percent for the first six months of this year as compared with the same period of 1958. Volume for the two companies totaled about $2,027,000 as compared with $1,290,000.

• **Ling-Altec Electronics, Inc.,** Culver City, Calif., announces acquisition of all the outstanding stock of **Continental Electronics Manufacturing Corp.,** Dallas, Tex. Purchase price was $3,600,000, of which $3,250,000 was in cash, with the remainder consisting of 10,000 shares of Ling-Altec common stock and $125,000 in 5-percent notes. Ling-Altec officials say the acquisition will add about $8 million to their consolidated sales volume for the remainder of the current year. Continental makes high-power transmission gear.

• **Hewlett-Packard Co.,** Palo Alto, Calif., announces acquisition of all of the outstanding stock of **Boonton Radio Corp.,** Boonton, N. J. Terms of the arrangement call for transfer of H-P stock for Boonton stock. Boonton Radio employs about 150 persons and has an annual sales volume of $2.5 million. The firm manufactures signal generators and similar instruments. No personnel or management changes are contemplated for the New Jersey firm.

• Popularity poll by **New York Stock Exchange** shows that among the fifty most-wanted stocks for monthly investment plan members, 11 are stocks of electronics firms. Highest of these (in the number two spot) is General Electric, with Sperry Rand following in sixth place. Eighth place is held by AT&T, followed by RCA in ninth place. General Telephone & Electric runs 16th, General Dynamics 17th. The 27th spot is held by Westinghouse, 41st by ITT, 45th by Texas Instruments, and 46th by Raytheon.

25 MOST ACTIVE STOCKS

WEEK ENDING AUGUST 28

	SHARES (IN 100's)	HIGH	LOW	CLOSE
Univ Control	974	19⅜	17⅝	18¼
Intl Tel & Tel	885	34⅝	32⅛	33⅝
Gen Dynamics	751	50⅜	46	50⅛
Avco Corp	598	13⅞	13⅛	13¾
Sperry Rand	573	23⅝	23	23
El-Tronics	462	1⅝	1⅜	1⅝
Raytheon	437	48¾	45⅛	48⅛
Gen Tel & Elec	406	73⅝	72½	72½
Gen Electric	384	82⅛	79⅞	82⅛
Elec & Mus Ind	316	7⅛	6¾	7
Texas Inst	286	142⅝	133⅛	142½
RCA	269	62¾	61⅝	62⅛
Zenith	259	109	100⅛	108¼
Admiral	255	21⅛	19⅛	20½
Gen Transistor	222	36½	33⅝	36
Barnes Eng	187	28⅛	23¼	27⅜
Philco Corp	184	25⅞	22⅛	25¼
Ampex	180	83¼	80½	82¼
Cons Elec Ind	166	50	44¾	50
Victoreen	164	15⅞	14¼	15⅛
Emerson	162	15⅜	14¾	15¼
Intl Bus Mach	151	428	422	424
Lear	147	15⅛	14¼	14⅞
Beckman Instr	141	57	53½	56¾
Cons Electrodnmcs	113	39¼	37⅛	39⅛

The above figures represent sales of electronics stocks on the New York and American Stock Exchanges. Listings are prepared exclusively for ELECTRONICS by Ira Haupt & Co.

NEW PUBLIC ISSUES

	No. of Shares	Issues Price
Acme Missiles	150,000	6
Electro-Sonic Labs	100,000	3
Electronic Data Process.	17,000	10
Entron Inc.	200,000	5
Navco Electronic Ind.	142,800	2

STOCK PRICE AVERAGES

(Standard & Poor's)	Aug. 26 1959	July 29 1959	Change From One Year Ago
Electronic mfrs.	89.05	98.56	+54.6%
Radio & tv mfrs.	108.67	116.42	+104.1%
Broadcasters	97.41	103.36	+44.5%

DEECO DELIVERS
TI SEMICONDUCTORS
OFF-THE-SHELF
AT
FACTORY PRICES

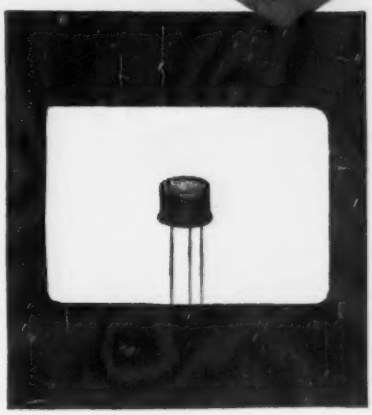

FOR FAST, SAME-DAY SHIPMENT of TI semiconductors, call DEECO, your authorized TI Distributor. The following are available in 1-999 quantities:

Silicon Transistors
Germanium Transistors
Silicon Diodes and Rectifiers
Carbon Film Resistors
sensistor Silicon Resistors: 1-499
tan-TI-*cap* Tantalum Capacitors: 1-99

FOR MAXIMUM RELIABILITY, specify *Texas Instruments* semiconductors — USE PROVED by thousands — GUARANTEED for one full year by TI.

DEECO Inc.
319 First Street N.W.
Cedar Rapids, Iowa
EMpire 4-2498

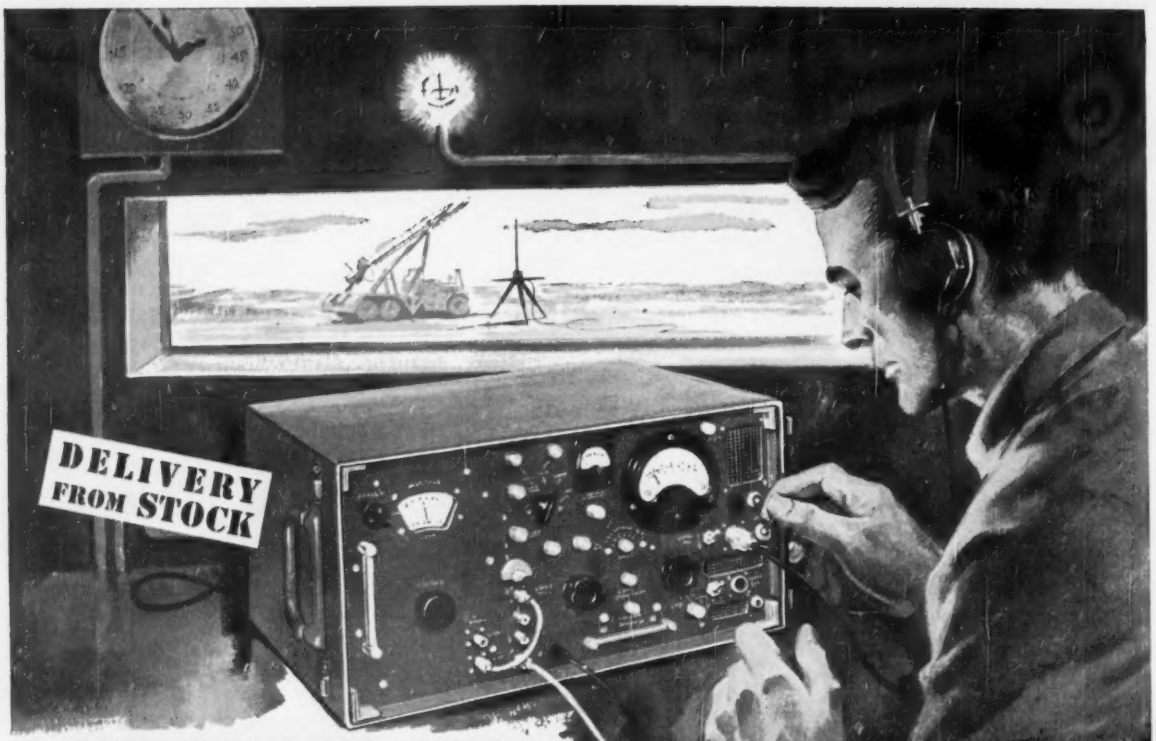

FLEXIBILITY IN THE FIELD...
just one of the many useful features of

EMPIRE'S NOISE & FIELD INTENSITY METER MODEL NF-105

Model NF-105 remotely located from its antenna, for personnel safety.

- Measures 150 kilocycles to 1000 megacycles accurately and quickly with only one meter.
- Approval status: MIL-I-6181B, Class 1, MIL-I-6181C, Category A; MIL-I-26600 (USAF).
- Direct substitution measurements by means of broadband impulse calibrator, without charts, assure repeatability.
- Self-calibrating, for reliability and speed of operation.
- True peak indication by direct meter reading or aural slideback.
- Four interchangeable plug-in tuning units for extreme flexibility.
- Economical . . . avoids duplication.
- Safeguards personnel . . . ALL antennas can be remotely located from the instrument without affecting performance.
- Compact, built-in regulated A and B power supply, for stability.
- Minimum of maintenance required, proven by years of field experience.

Only the Model NF-105 is so simple to operate that one technician can take readings over the entire frequency range in less time than required by three engineers manning any other three separate instruments.

Send for our Catalog No. N-358

edp

EMPIRE DEVICES PRODUCTS CORP.
AMSTERDAM, NEW YORK — VICTOR 2-8400

MANUFACTURERS OF:
FIELD INTENSITY METERS • DISTORTION ANALYZERS • IMPULSE GENERATORS • COAXIAL ATTENUATORS • CRYSTAL MIXERS

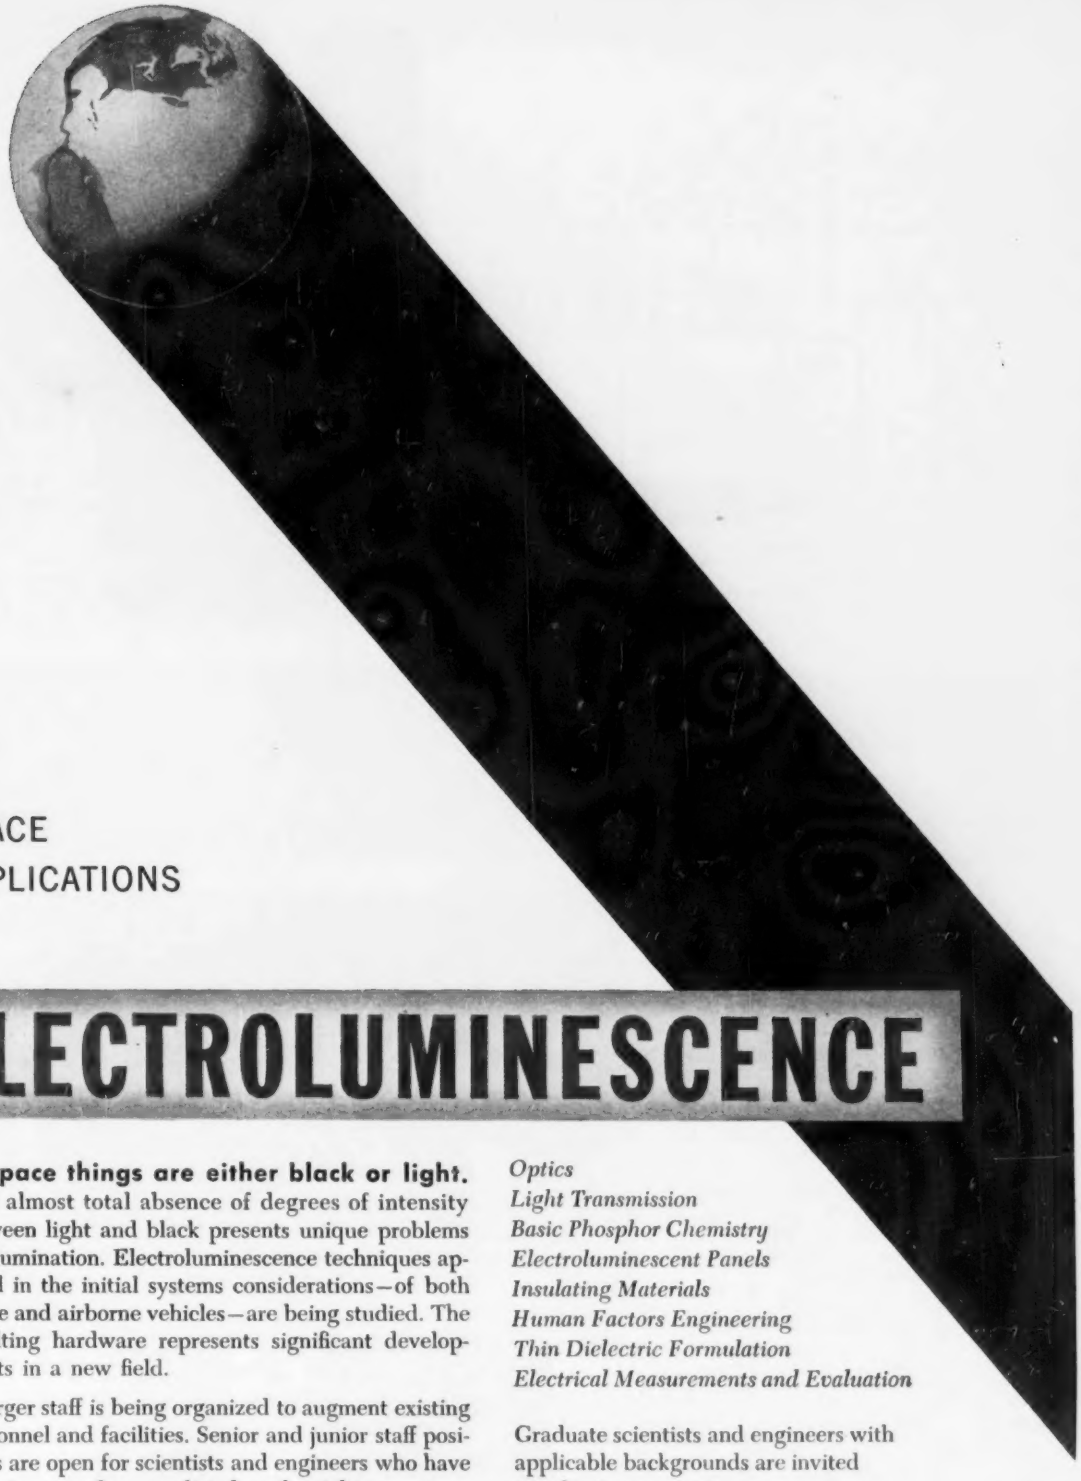

SPACE
APPLICATIONS
OF

ELECTROLUMINESCENCE

In space things are either black or light. This almost total absence of degrees of intensity between light and black presents unique problems in illumination. Electroluminescence techniques applied in the initial systems considerations—of both space and airborne vehicles—are being studied. The resulting hardware represents significant developments in a new field.

A larger staff is being organized to augment existing personnel and facilities. Senior and junior staff positions are open for scientists and engineers who have experience in the areas listed on the right.

Optics
Light Transmission
Basic Phosphor Chemistry
Electroluminescent Panels
Insulating Materials
Human Factors Engineering
Thin Dielectric Formulation
Electrical Measurements and Evaluation

Graduate scientists and engineers with applicable backgrounds are invited to submit a resume to:

Mr. R. A. Martin, Supervisor
Professional Placement Staff
HUGHES RESEARCH AND DEVELOPMENT LABORATORIES
Culver City 60, California

HUGHES

©1959, HUGHES AIRCRAFT COMPANY

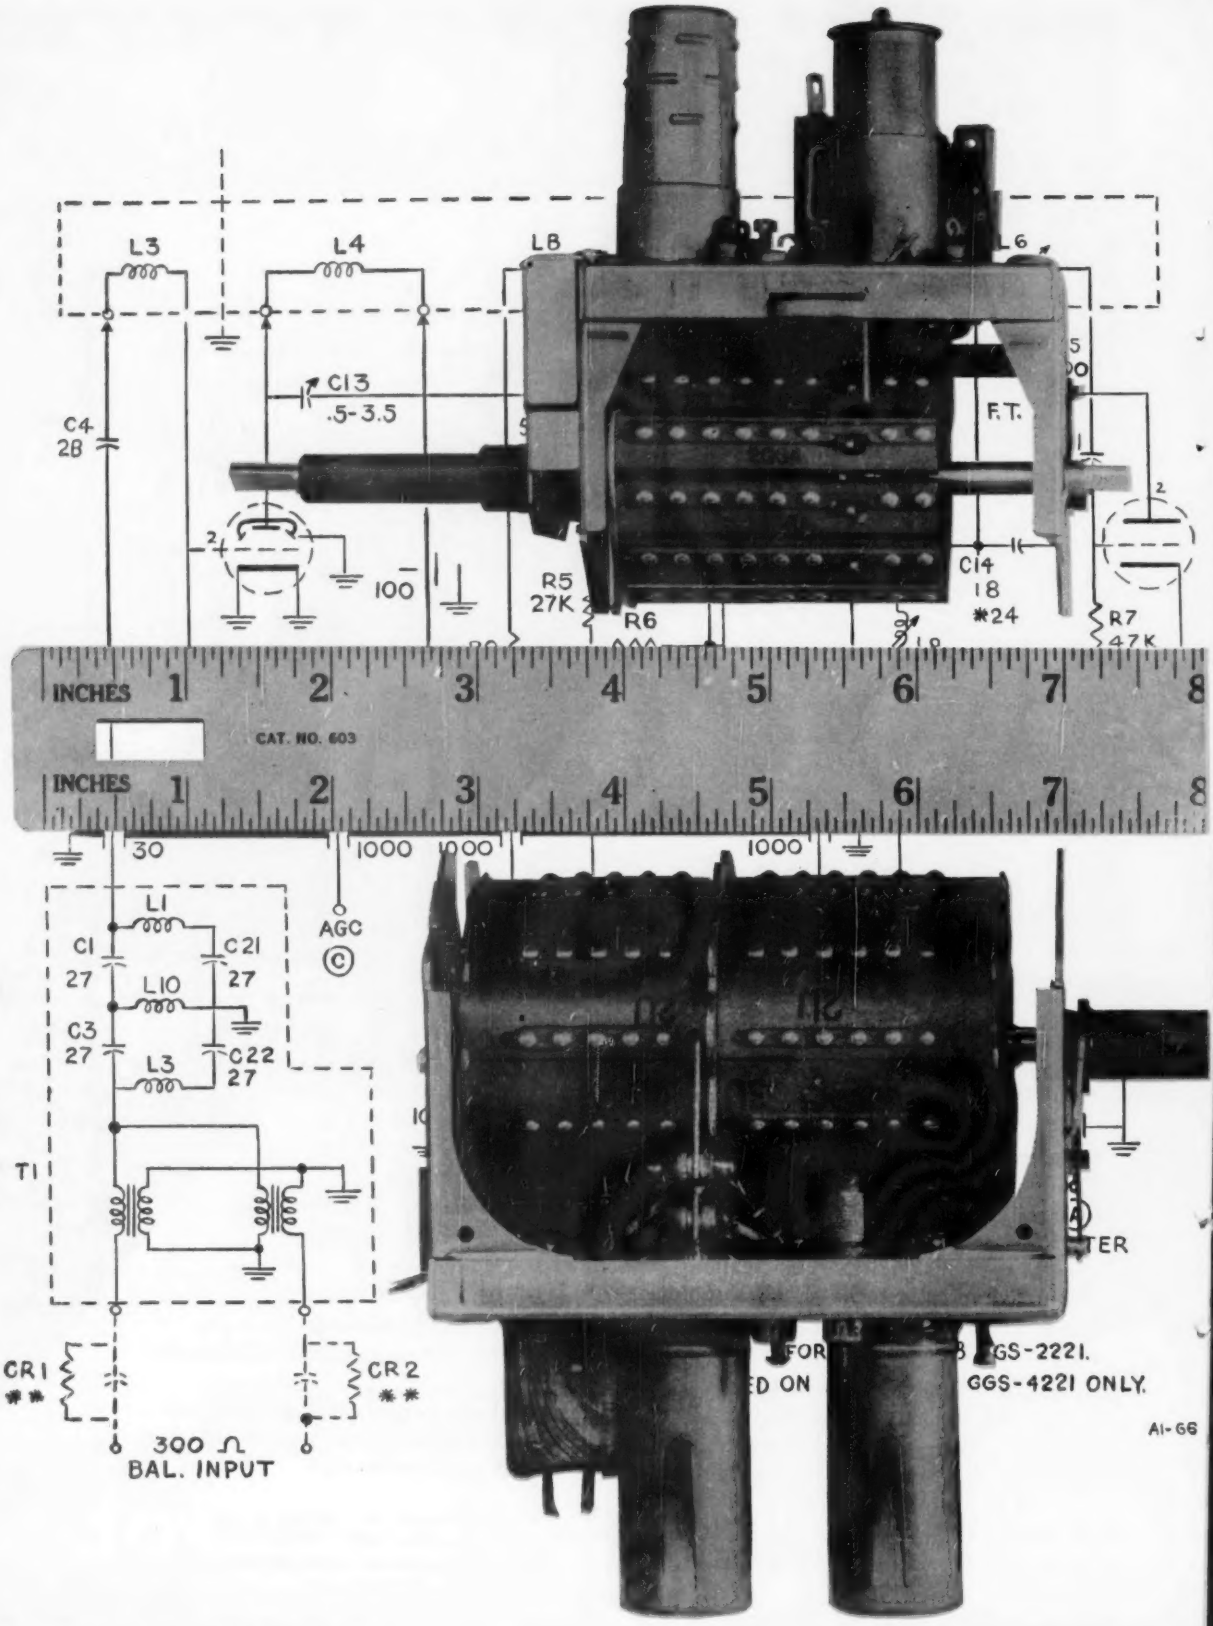
L3
L4
L8
L6
C13
.5-3.5
C4
28
F.T.
100
R5
27K
R6
C14
18
*24
R7
47K
INCHES 1 2 3 4 5 6 7 8
CAT. NO. 603
INCHES 1 2 3 4 5 6 7 8
30
1000
1000
1000
L1
C1
27
C21
27
L10
C3
27
L3
C22
27
T1
AGC
CR1
**
CR2
**
300 Ω
BAL. INPUT
FOR
GGS-2221.
GGS-4221 ONLY.
AI-66

Plaskon

ALKYD MAKES POSSIBLE SMALLER TV AUTOMATIC TUNER

Reliability of Alkyds permits miniaturization and improved performance

Automatic tuning for television that eliminates troublesome manual fine tuning has been achieved by Standard Coil Products in its new GG-4200 Automatic Tuner and Station Selector.

PLASKON Alkyd figured prominently in this development due to these *unusual electrical qualities:*

- Dielectric stability of tuner segments molded from PLASKON Alkyd gives a new high in VHF performance by reducing oscillator frequency drift.
- Changes in dielectric constant due to time and elevated temperatures are minimized.
- Dimensional stability of Alkyd maintains circuit constants. This prevents change in relationship between coils, contacts and other circuit elements—thus stabilizing circuit capacitance.

PLASKON Alkyd aided the molder Wilcox Plastics, with these *outstanding molding properties:*

- Rapid molding cycles at low molding pressure permits mass production of intricate pieces.
- Uniformity of this Alkyd molding material provides unvarying precision of each molded part.
- The high mechanical strength of PLASKON Alkyd molded parts helps to accelerate separate staking operation for insertion of small contacts.

PLASKON Alkyd is outstanding for the qualities most necessary in molded parts for electronic and electrical applications. Competent Plaskon representatives will be glad to discuss material recommendations and fabricating techniques to fit your performance requirements.

PLASTICS AND COAL CHEMICALS DIVISION
40 Rector Street, New York 6, N. Y.

Basic to America's Progress

Allied Chemical

CIRCLE NO. 27 READER SERVICE CARD

And here's how you can release the brakes on your career.

DOUGLAS AIRCRAFT COMPANY
MISSILES AND SPACE SYSTEMS

has immediate openings in the following fields—

Electrical and Electronics:
Control System Analysis & Design
Antenna & Radome Design
Radar System Analysis and Design
Instrumentation
Equipment Installation
Test Procedures
Logic Design
Power System Design

Mechanical Engineering—
Analysis and Design of the following:
Servo Units
Hydraulic Power Systems
Air Conditioning Systems
Missile Launcher Systems
Propulsion Units and Systems
Auxiliary Power Supplies

Aeronautical Engineering:
Aerodynamic Design
Advanced Aerodynamic Study
Aerodynamic Heating
Structural Analysis
Strength Testing
Dynamic Analysis of Flutter and Vibration
Aeroelasticity
Design of Complex Structure
Trajectory Analysis
Space Mechanics
Welding
Metallurgy

Physics and Mathematics:
Experimental Thermodynamics
General Advanced Analysis in all fields
Computer Application Analysis
Computer Programming and Analysis
Mathematical Analysis

For full information write to:

Mr. C. C. LaVene
Box F-620
Douglas Aircraft Company, Inc.
Santa Monica, Calif.

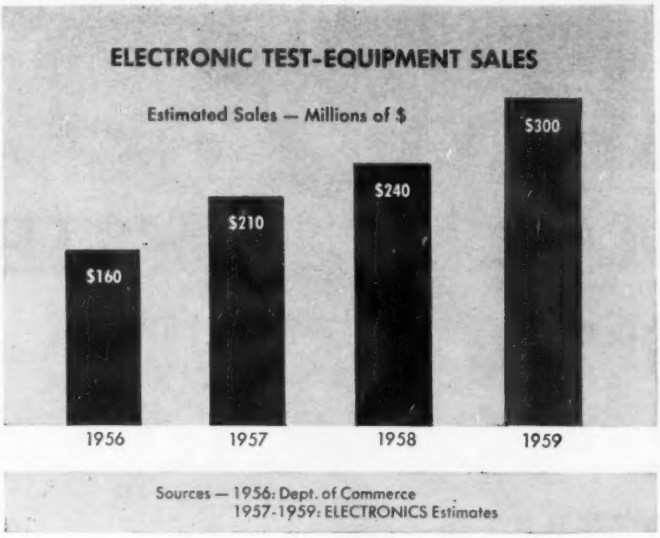

Test-Instrument Sales Growing

SMALL LEGION of new product developers and investigators are currently busy studying the market for electronic test instruments. Reason: the rapid rate at which the test-instrument business is growing and resulting profit opportunities.

Test-instrument sales have been rising at an average rate of better than 20 percent since 1956. By end of 1959, sales are expected to total some $300 million, compared with about $240 million in 1958 and $210 million in 1957.

Figures for 1957-1959 are rough estimates, based on opinions of leading manufacturers and estimates of trade groups.

Department of Commerce survey of electronic instruments in 1956 disclosed that sales of general-purpose electronic test instruments were running at rate of $160 million annually.

Items included in the estimates are general-purpose instruments for testing and measuring electronic properties, sold to both military and nonmilitary users. For example, radio-frequency signal generators, audio oscillators and cathode-ray oscilloscopes are included. Electrical quantity- and characteristic-measuring instruments like panel voltmeters, ammeters and megohmeters are excluded. Special-purpose test equipment, designed solely for use in one system, are excluded.

Main factors behind the growth of test equipment sales, according to the Scientific Apparatus Manufacturers Association, are the steadily rising levels of research and development spending and the increasing importance of electronics in the military fields.

• **General Transistor** adds its voice to those manufacturers who are saying that 1959 semiconductor sales will be much higher than many expect. Herman Fialkov, GT president, looks for a minimum semiconductor sales total this year of $350 million. But, he thinks chances are good that sales will hit $400 million.

Transistor share of 1959 semiconductor business will be about $200 million, estimates Jerome Fishel, GT's vice president of marketing. He looks for an increase of 35-40 percent in 1960.

FIGURES OF THE WEEK

LATEST WEEKLY PRODUCTION FIGURES

(Source: EIA)	Aug. 21, 1959	July 24, 1959	Change From One Year Ago
Television sets	138,758	98,447	+6.28%
Radio sets, total	274,526	240,644	−4.23%
Auto sets	83,041	77,827	+2.56%

LATEST MONTHLY SALES TOTALS

(Add 000)	June 1959	May 1959	Change From One Year Ago
Rec. tubes, value	$33,099	$25,904	+5.26%
Rec. tubes, units	37,421	30,612	+3.17%
Pic. tubes, value	$15,137	$12,746	+6.57%
Pic. tubes, units	767	667	+5.61%

Air brake for a spaceliner

The earth's atmosphere, one of the biggest obstacles to getting into outer space, can be one of our biggest assets coming back. At Douglas we are investigating how we can use its braking effects on rockets returning from deep space trips at far faster than ICBM speeds. Success will allow us to increase payloads by reducing the weight of soft landing systems. This technique also will aid us in pinpointing landing areas. Current reports show real progress. Douglas is engaged in intensive research on every aspect of space planning, from environmental conditions on other planets to the destroyer-sized space ships necessary to get there. We invite qualified engineers and scientists to join us. Some of our immediate needs are listed in the column on the facing page. Please read it.

Arthur Shef, Chief, Advanced Design Section, Missiles and Space Systems, irons out a problem with Arthur E. Raymond, Senior Engineering Vice President of DOUGLAS

MISSILE SYSTEMS ■ SPACE SYSTEMS ■ MILITARY AIRCRAFT ■ JETLINERS ■ CARGO TRANSPORTS ■ AIRCOMB ■ GROUND-HANDLING EQUIPMENT

New Simpson "Add-A-Testers"

Converts your 260* into seven different testers!

Think of it! A small investment turns your 260 VOM into a whole array of testers—equipment with a quality that is found only in individual pieces of test equipment at much higher prices. The secret lies in combining an adapter with the *top-notch meter and circuitry* of your 260.

Each combination of Add-A-Tester unit and 260 is self-contained, self-powered. Each adapter goes on and off in a jiffy. No gadgets, no complicated connections. Furthermore, Add-A-Tester units require only 1/2 to 1/3 the storage space of individual testers. By reducing bench clutter, this compactness makes jobs go faster, raises shop efficiency. Make your 260 do double duty. Stop in at your Electronics Parts Distributor or write the factory for further information.

*Trademark

TRANSISTOR TESTER, Model 650.....$26.95
Beta Ranges: 0-10, 0-50, 0-250, (F.S.)
Beta Accuracy: ±3%, with 260 ±5% nominal
Ico Range: 0-100 ua
Ico Accuracy: ±1%, with 260 ±3% (F.S.)

DC VTVM, Model 651.....$32.95
Voltage Ranges: 0-.5/1.0/2.5/5.0/10/25/50/100/250/500
Accuracy: ±1%, with 260 ±3% (F.S.)
Input Impedance: greater than 10 megs all ranges

TEMPERATURE TESTER, Model 652....$38.95
Temperature Ranges: −50°F to +100°F, +100°F to +250°F
Accuracy: with 260 ±2° (nominal)
Three lead positions provided
Sensing Element: thermistor

AC AMMETER, Model 653.....$18.95
Ranges: 0-0.25/1/2.5/12.5/25 amps
Accuracy: ±1%, with 260 ±3% nominal
Frequency Range: 50 cycles to 3000 cycles

AUDIO WATTMETER, Model 654.....$18.95
Load Ranges: 4,8,16,600 ohms
Wattage: Continuous 25 watts (8,600 ohms)
50 watts (4,16 ohms)
Intermittent 50 watts (8,600 ohms)
100 watts (4,16 ohms)
Accuracy: ±5%, with 260 ±10% nominal
Direct reading scale from 17 microwatts to 100 watts

MICROVOLT ATTENUATOR, Model 655..$18.95
Ranges: 2.5 microvolts to 250,000 microvolts continuously variable in decade steps
Frequency: DC to 20 KC
Accuracy: ±1db

BATTERY TESTER, Model 656.....$19.95
Checks all radio and hearing aid batteries up to 90 volts at the manufacturer's recommended load, or any external load.

Note: All Simpson 260 Adapters provide for normal 260 usage without disconnecting the adapter.



Simpson ELECTRIC COMPANY

5203 West Kinzie Street • Chicago 44, Illinois
Phone: EStebrook 9-1121
In Canada: Bach-Simpson Ltd., London, Ontario

WORLD'S LARGEST MANUFACTURER OF ELECTRONIC TEST EQUIPMENT

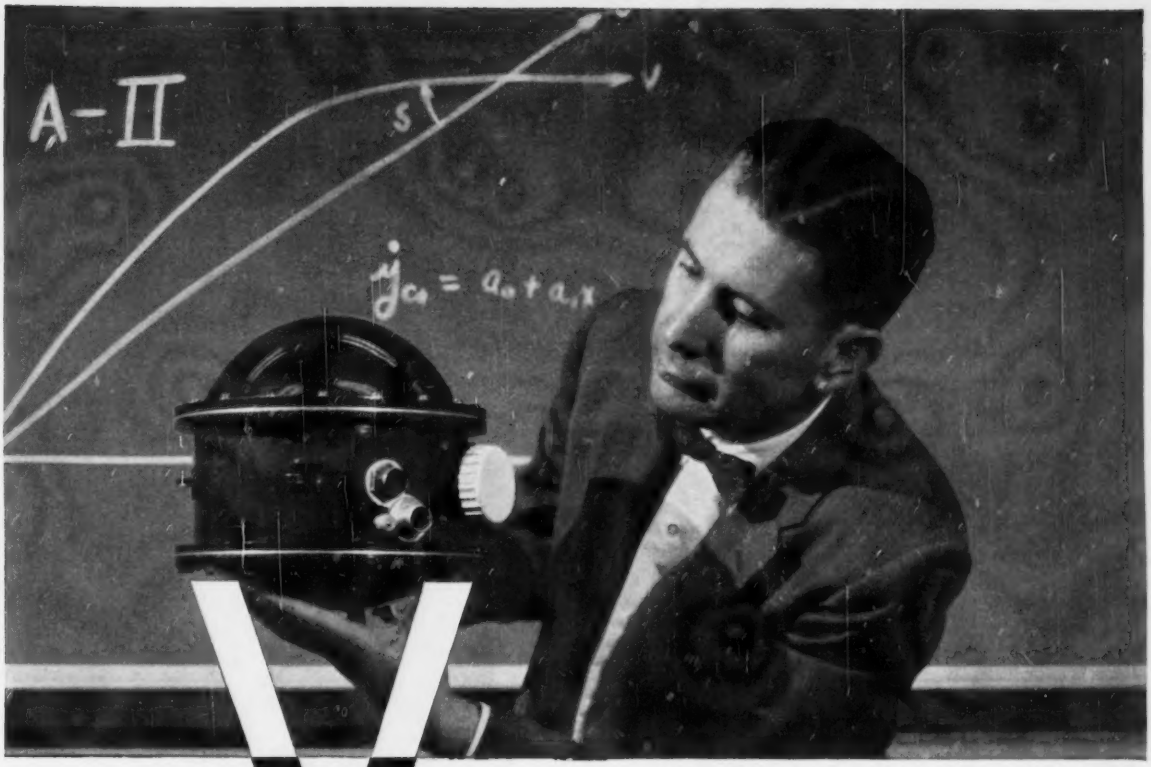

Edwin Felch, project director in charge of developing the Titan guidance system, holds the "voice" of the ICBM.

VOICE OF A GUIDED MISSILE

This is a missile-borne transmitter. It is the "voice" of a missile in flight . . . part of a new radio-inertial guidance system developed by Bell Telephone Laboratories for the Ballistic Missile Division of the Air Force.

This versatile system helped deliver the nose cone of a Thor-Able test missile precisely to its South Atlantic target area—5000 miles from Cape Canaveral, Florida. So accurately was the nose cone placed that a waiting group of ships and planes retrieved it in a matter of hours. It was the first nose cone ever to be recovered after so long a flight.

The command guidance system which made such accuracy possible combines precision tracking radar with a special Remington Rand Univac computer. Fed a steady stream of signals from the missile-borne transmitter, the ground-based equipment compares the missile's flight path with the preselected path. Corrective steering orders are computed and transmitted automatically to the missile. The ground station monitors the progress of the flight continuously and obtains immediate evaluation of mission success. And since the principal control equipment is kept on the ground, expendable hardware in the missile itself is minimized.

This radio-inertial guidance system is a product of the Bell Laboratories-Western Electric development-production team. It is in production at Western Electric for the first operational squadrons of the Titan intercontinental ballistic missile.

Bell Labs scientists and engineers developed the world's most versatile telephone network and much of our nation's radar. They have constantly pioneered in missile systems. From their storehouse of knowledge and experience comes this new achievement in missile guidance.

BELL TELEPHONE LABORATORIES

World center of communications research and development

BASIC REQUIREMENTS

for outer space

The space/missile era has made it essential for today's components and systems to function precisely in environments that are literally out-of-this-world. Such stringent requirements can only be met by companies long experienced in component design and with proved records of imaginative engineering. Kearfott, long the leader in servo component design and production, has consistently looked into the future to anticipate the increased performance characteristics missile components must supply. As a result, it has not only developed an entirely new generation of precision components but established the ability to create radically new concepts in sensors and control elements.

THE PROBLEM: **HIGH ACCURACY**
THE SOLUTION: Synchros with maximum error from electrical zero of 20 seconds. Tachometers with linearity .05% over the speed and temperature range.

THE PROBLEM: **HIGH AND LOW TEMPERATURE**
THE SOLUTION: Servomotors, synchros and tachometers are now available for the temperature range of −54° C to 200° C with new developments soon to increase the range to 400° C.

THE PROBLEM: **RADIATION RESISTANCE**
THE SOLUTION: Kearfott servomotors, synchros and tachometers operate at 200° C and can withstand radiation of 10^9 through 10^{10} roentgens.

THE PROBLEM: **SHOCK AND VIBRATION**
THE SOLUTION: All Kearfott components can be supplied to function as required during or after 20 g's shock or 2000 cps vibration.

THE PROBLEM: **MINIATURIZATION**
THE SOLUTION: Size 5 synchros and servomotors. Size 8 components are outstanding examples of Kearfott's ability to combine miniaturization with precise performance.

THE PROBLEM: **LONG LIFE**
THE SOLUTION: Components are being developed which will operate continuously for 12 months in a total vacuum, the environment of outer space.

Representative of Kearfott's ability to look ahead are such current areas of development as Solid State Transducers and Control System Components. **You can take advantage of Kearfott's long-established know how in developing precision components for today — and tomorrow — by writing for details concerning your specific requirements.**

Engineers: Kearfott offers challenging opportunities in advanced component and system development.

Kearfott | A GENERAL PRECISION COMPANY

KEARFOTT COMPANY, INC., LITTLE FALLS, N. J.
A subsidiary of General Precision Equipment Corporation
Sales and Engineering Offices: 1500 Main Avenue, Clifton, N. J.
Midwest Office: 23 W. Calendar Avenue, La Grange, Illinois
South Central Office: 6211 Denton Drive, Dallas, Texas
West Coast Office: 253 N. Vinedo Avenue, Pasadena, California

From Detroit, Camden, or L. A.

TEXAS INSTRUMENTS SEMICONDUCTORS

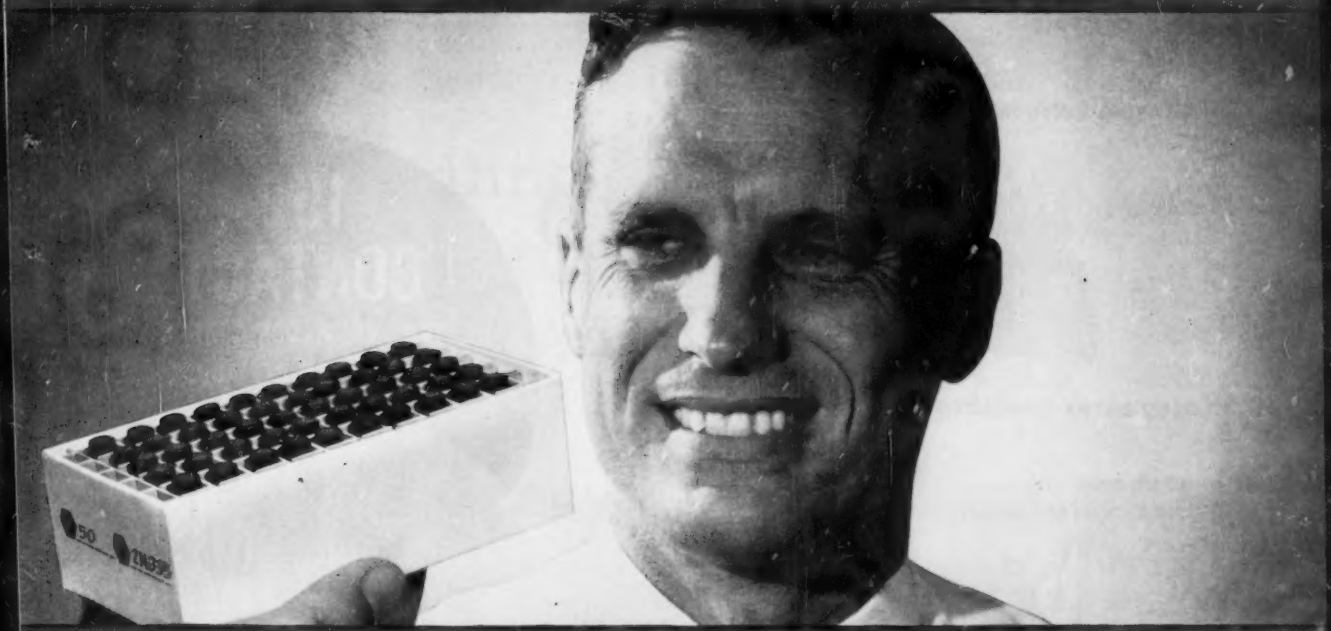

DELIVERED OFF-THE-SHELF OVERNIGHT

RADIO PRODUCTS SALES	FERGUSON ELECTRONIC SUPPLY CO.	GENERAL RADIO SUPPLY CO.
LOS ANGELES	DETROIT	CAMDEN

Ready to give you fast, time saving local service, these three authorized TI distributors are backed by the pioneering leader with the greatest semiconductor experience — Texas Instruments — to deliver to you the most advanced, dependable semiconductor and component products available anywhere.
If you have an electronic component requirement, contact one of these three listed distributors for overnight delivery at factory prices from his complete line of TI stock.

Order today in the following quantities:

1-999:

silicon transistors, germanium transistors, silicon diodes and rectifiers, carbon film resistors

1-499:

***sensistor* silicon resistors**

1-99:

***tan*-TI-*cap* tantalum capacitors**

Your Authorized TI Distributor

RADIO PRODUCTS SALES INC.
1501 South Hill Street
Los Angeles 15, California
Richmond 9-7471

Ferguson *Company*
Electronic Supply
2306 Puritan · Detroit 38, Michigan
UNiversity 1-6700

GENERAL RADIO
SUPPLY COMPANY, Inc.
600 Penn Street · Camden 2, New Jersey
WOodlawn 4-8560

new!.. ...from Continental Connector

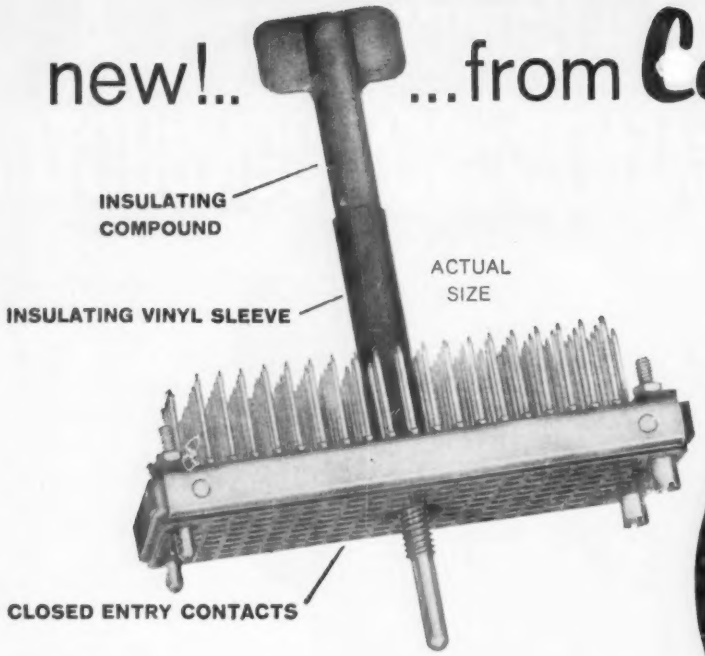

152 CONTACT

CENTER SCREWLOCK CONNECTOR WITH PROVEN RELIABILITY

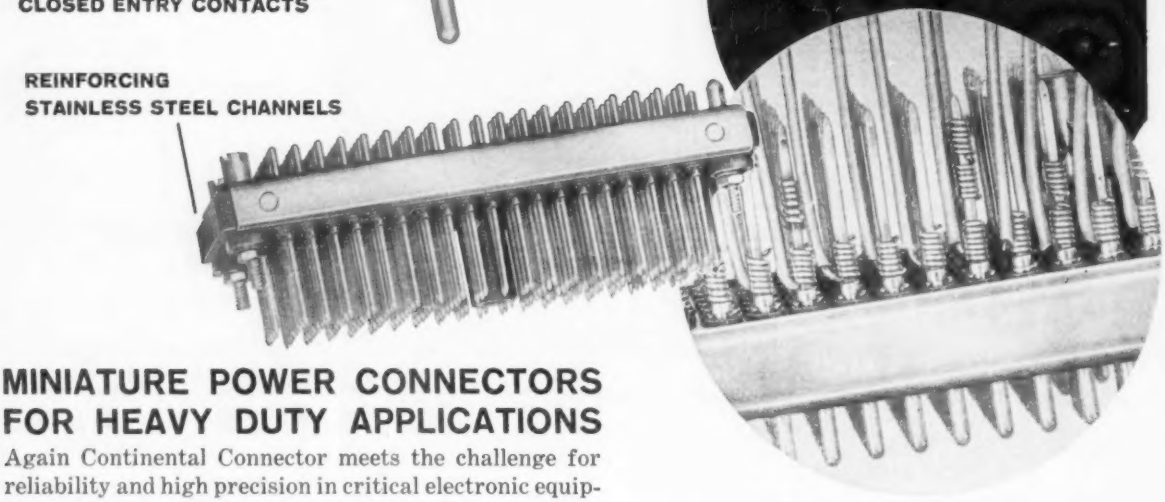

ILLUSTRATION SHOWS WIRE WRAP TERMINALS WITH ONE, TWO AND THREE WIRE CONNECTIONS

MINIATURE POWER CONNECTORS FOR HEAVY DUTY APPLICATIONS

Again Continental Connector meets the challenge for reliability and high precision in critical electronic equipment with these new center screwlock plug and socket connectors. They are designed for heavy duty applications requiring high dielectric and mechanical strength, partially achieved by the use of a body material molded from glass filled Diallyl Phthalate (MIL-M-19833, Type GDI-30, green). The double lead thread action center screwlock and stainless steel channels are extra features that contribute to the rugged construction and performance-proven reliability.

CLOSED ENTRY CONTACTS provide increased reliability and maintain a low millivolt drop under constant and uniform insertion pressure. Positive polarization is assured with reversed male and female guide pins and guide sockets. In addition to the wire wrap termination illustrated, solderless taper pin or solder cup terminals can also be supplied.

also available with 104, 78 or 34 contacts

ENLARGED VIEW
CLOSED ENTRY CONTACT

For complete specifications on Continental Connector's new Series 1900, write to Electronic Sales Division, DeJUR-AMSCO CORPORATION, 45-01 NORTHERN BOULEVARD, L. I. C. 1, N. Y. (Exclusive Sales Agents)

MANUFACTURED BY CONTINENTAL CONNECTOR CORPORATION, AMERICA'S FASTEST GROWING LINE OF PRECISION CONNECTORS

POWER

handling capacity of the new Westinghouse Silicon

POWER

transistor!

Greater than 99% efficiency when used to handle 1.5 kw of power in a low-frequency DC switch! Power loss is only 10-15 watts when handling 1.5 kw. That's just one of the impressive specifications established by a remarkable new semiconductor device—the Westinghouse Silicon Power Transistor.

This Power Transistor is remarkable in other ways, too . . .

- It is the first power transistor available in voltage ranges above 100 volts.
- It has power dissipation capability of 150 watts made possible by the low thermal resistance of .7°C/watt.
- It can operate at higher temperatures than germanium (150°C., compared to 85°C).
- It has astonishingly low saturation resistance—less than .5 ohms at 5 amperes and .75 ohms at 2 amperes, an achievement made possible through extensive research and development of hyper-pure Siemens-Westinghouse Silicon.
- It is 100% power-tested under actual maximum rated specifications before leaving the plant.
- It is encapsulated in a rugged, all-welded case.

HERE ARE A FEW OF THE APPLICATIONS . . .

• Inverters and converters • Data processing circuits • Servo output circuits • Series regulated power supplies • As a low frequency switch • In class A amplifiers.

Available in 2 and 5 ampere collector ratings in production quantities now. For complete specifications and details, contact your local Westinghouse representative.

YOU CAN BE SURE... IF IT'S Westinghouse

Westinghouse Electric Corporation, Semiconductor Department, Youngwood, Pa.

CIRCLE NO. 35 READER SERVICE CARD

puts design to work ... fast!



Speeds office paper work, too Table-model Ozamatic has 16″ width, turns out up to 1000 copies an hour. Used widely for "one-writing" business systems, general copying. Send for folder No. L-9-11 to Ozalid Division, General Aniline & Film Corp., Johnson City, N. Y.

OZALID DIRECT-COPYING saves time—for the engineer, architect, draftsman—through fast, dependable reproduction of prints. Slashes retracing time when design changes are made. Safeguards valuable originals. Cost? Less per copy than any other copying process! The new Printmaster 1000 (shown above) offers more *useful* speed than any other whiteprinter—up to 100 f.p.m.—gives clear, dry copies in seconds. There's an Ozalid product for every copying need, every budget! Call your local Ozalid representative, or write: Ozalid Division, General Aniline & Film Corp., Johnson City, N. Y.

WHITEPRINT MACHINES • MICROFILM EQUIPMENT • AUDIO-VISUAL PRODUCTS
SENSITIZED MATERIALS • PRODUCTS FOR DESIGN • LITHOGRAPHIC PRODUCTS

OZALID

Division of General Aniline & Film Corp., In Canada: Hughes-Owens Co., Ltd., Montreal

CIRCLE NO. 37 READER SERVICE CARD→

introducing the new Fansteel

GOLD-CAP

TRADE MARK

TANTALUM CAPACITOR

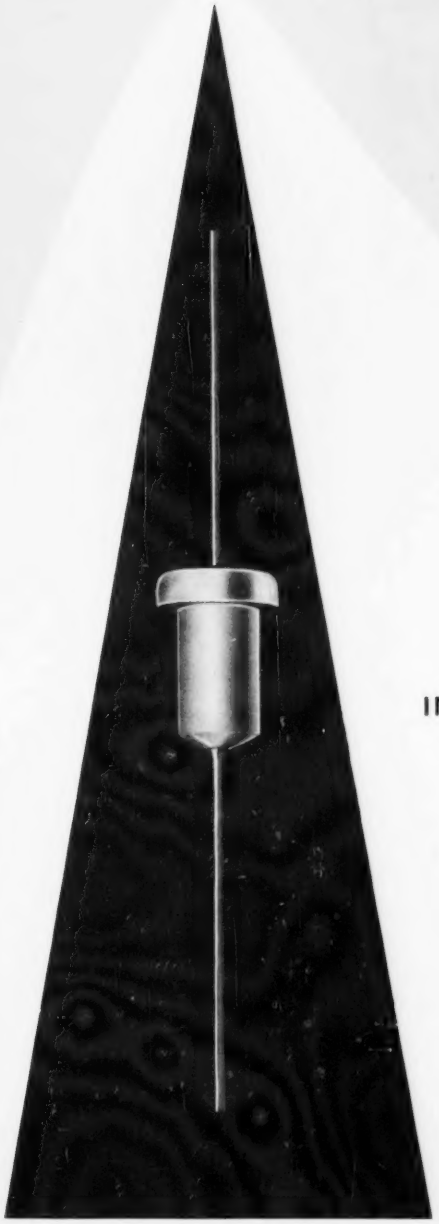

the world's most reliable capacitor

INDIVIDUALLY TESTED

INDIVIDUALLY NUMBERED and REGISTERED

INDIVIDUALLY CERTIFIED

each conforming to the most complete and rigid specifications ever prescribed for any production component.

FANSTEEL RELIABILITY

only Fansteel dares offer

PROOF

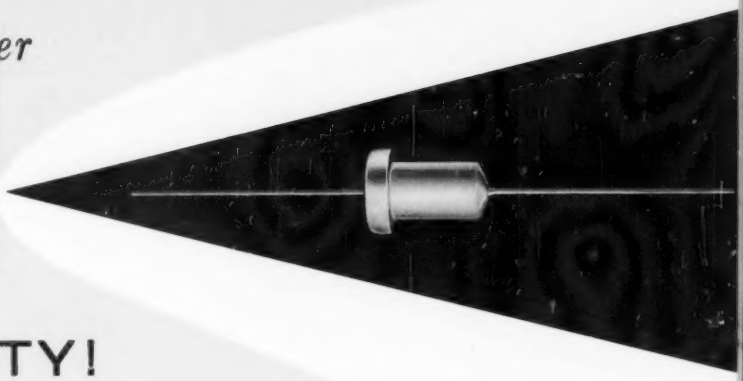

OF RELIABILITY!

The Gold-Cap Tantalum Capacitor is Fansteel's solution to one of today's really critical problems—the urgent need for a tantalum capacitor of absolute, unquestioned reliability. It is the first capacitor ever to be offered with *proof in writing* of pre-tested reliability.

This proof is based upon a series of the most uncompromising tests ever devised for checking reliability in a tantalum capacitor. Each Gold-Cap is assigned a registered serial number and all test results are recorded by this individual number.

Thus, every Gold-Cap shipped to you has gone through exhaustive testing . . . meets the Gold-Cap Specification No. 6CA-101 . . . and is accompanied by its own certified record of test results—written proof of its pretested reliability.

Only Fansteel dares take the responsibility of pretesting for you . . . *and certifying the results!*

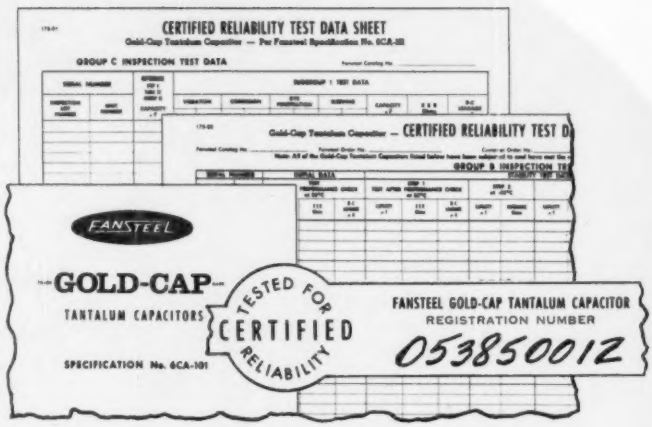

THE FANSTEEL CERTIFICATION OF RELIABILITY
makes any further inspecting or testing for reliability unnecessary.

THE GOLD-CAP TESTS FOR CERTIFIED RELIABILITY

GROUP A TESTS

Sample Lot Inspection:

Material / Dimensions / Marking / Workmanship

Design and Construction

Note: All Group A Tests shall be in accordance with MIL-STD-105.

GROUP B TESTS

100% Inspection:

Performance check

Stability Tests at reduced and high temperatures (25°C. to –55°C. to 25°C. to 125°C. and back to 25°C.) for:

1. Capacitance
2. DC Leakage
3. Equivalent Series Resistance (ESR)
4. Impedance

GROUP C TESTS

Sample Lot Inspection:

Reduced Barometric Pressure (tested to equivalent of 100,000 feet). / Lead Tensile Test / Vibration / Shock / Salt Spray / Temperature and Immersion Cycling / Surge Voltage / Moisture Resistance / Lead Bend Test

Sample units selected from those meeting Group A and B Test requirements.
Continuing 2000-Hour Life Test

FANSTEEL RELIABILITY

If you want to learn more about what makes the Fansteel Gold-Cap the world's most reliable tantalum capacitor, write to the Publications Department, Fansteel Metallurgical Corporation, North Chicago, Illinois and ask for Gold-Cap Tantalum Capacitor Specification No 6CA-101

C-599

FANSTEEL METALLURGICAL CORPORATION / North Chicago, Illinois, U.S.A.

Now! CIC COMPUTER INSTRUMENTS CORPORATION FIRST AGAIN!

MINIATURE MULTI-TURN PRECISION FILM POTS

MODEL 7810

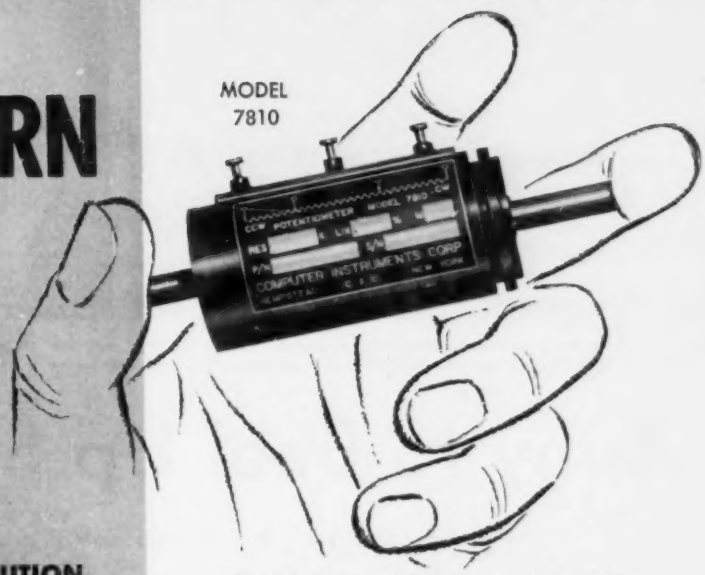

FEATURING:

- **VIRTUALLY INFINITE RESOLUTION**
  Eliminates servo hunting
- **LONG LIFE AT HIGH SPEEDS**
  10,000,000 revolutions—500 rpm

EXCLUSIVE FEATURES:

- **NON-LINEAR OUTPUTS**
  No Tapping and Shunting
- **DUAL GANG—SINGLE GANG**
  SAME CASE SIZE!
  SAME STARTING TORQUE!
  SAME INERTIA!
- **ONE PIECE THROUGH SHAFT**
  Pot fits *anywhere* in your gear train
- **ONE PIECE, ALL METAL CASE**
  Machined-In, Stay-Put Accuracy

This miniature multi-turn precision film pot is not just better than wire-wound types—it brings a new dimension of performance and flexibility to your system. With SuperCon Film pots you can forget about the obsolete concepts of wire resolution, clumsy tapping and shunting to produce non-linear outputs, bulkiness in ganging, and loose-wire, glued-assembly construction. The ball-bearing supported, one-piece through shaft permits you to locate your pot *anywhere* in the gear train, freeing you to select the optimum ratios with the minimum components, to transmit torque through the pot, to miniaturize even more. SuperCon Film pots have the inherent accuracy and reliability to easily meet your requirements.

CIC is the largest manufacturer of Precision Film Potentiometers, having pioneered in their development, with a 10-year record of supply to all branches of the Armed Services and throughout industry. Our staff of technical specialists is ready to assist you with your potentiometer needs.

Write for our catalog.

92 Madison Avenue, Hempstead, L. I., N. Y.

CIC COMPUTER INSTRUMENTS CORPORATION

FIRST IN FILM POTS

SINGLE TURN POTS | SINE-COSINE POTS | LINEAR MOTION POTS | PRESSURE TRANSDUCERS | COMMUTATORS

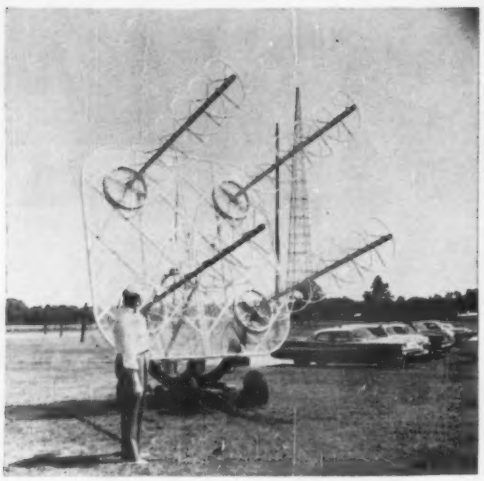

At Army Satelite Tracking Center near Ft. Monmouth, N. J., director Lloyd H. Manamon shows new Radiquad 4-helix tracking and telemetry antenna (left) and Dymec's digital data system, part of new gear enabling . . .

Army to Beef Up Sky Watch

New equipment going into Signal Corps' east coast satellite tracking center will make the station unique in range and flexibility

DEAL, N. J.—Our eastern seaboard sentry, Army's satellite tracking center here, listens 24 hours a day for radio signals from potentially hostile satellites or other orbiting vehicles—and is now completing an impressive buildup in its capabilities, ELECTRONICS learns.

With the old equipment, housed in one small room, the satellite tracking center was able to lock on to Sputnik I two hours after launch. New equipment now being installed will vastly increase the center's operational hearing range in distance as well as bandwidth.

Range is increased by switching from one to another of the six large conical-helix antennas in the facility. Wide band range—Doppler measurements can be made on any emission from 15 kc to 1,000 mc—will make the station unique in its flexibility, says center director Lloyd H. Manamon. Maximum frequency may be 3,000 mc next year.

Capabilities, Projects

Basic capabilities include routine recording of signal levels on 20, 40 and 108 mc, and monitoring of any frequency between 15 kc and 50 mc, 107 to 109 mc, 225 to 400 mc and 800 to 1,000 mc.

As part of U. S. Army Signal Research and Development Laboratory (USASRDL) at Fort Monmouth, N. J., the satellite tracking center here is engaged in several important projects:

About 80 percent of the effort involves satellite tracking and radio propagation studies. Remaining 20 percent goes into R&D of the center's long-range point-to-point communications receiving system, operating from 2 mc to 20 mc.

Satellite tracking work is broken down into two functions: operational tracking and use of the data obtained for R&D work on new tracking systems and space communication equipment.

Received signals are recorded and analyzed for frequency and signal characteristics. Doppler determines satellite's position and velocity.

Information is passed on by commercial wire to Army Ballistic Missile Agency (ABMA) in Huntsville, Ala., Jet Propulsion Laboratory, Pasadena, Calif., and the National Aeronautics and Space Administration's SpaceComm in Washington, D. C. A direct wire also sends data to Cape Canaveral, Fla.

Northeast launchings from Canaveral are picked up almost at once here and by the center's two portable tracking units in Maine and at Cape Hatteras, N. C. Called Operation Quick Look, this pre-orbital monitoring records signals 30 seconds before the third stage firing until 30 seconds afterwards. The Doppler equipment turns out information at the rate of 750 words a minute. This raw data is sent by wire to ABMA Evaluation Center where it is processed by computers.

Constantly Improving

Air Force launchings from Vandenberg, Calif.—usually toward the south—are not picked up here until about their 10th hour. Once detected, they, as well as Russian satellites, get the same thorough treatment as Army shots.

Deal has never missed a satellite—to date totaling 14. Three are currently transmitting; Vanguard I, Sputnik III, and Discoverer VI.

Constantly improving the system are new techniques, including new types of antennas, improved receiv-

ing equipment and faster and better ways of transmitting raw data to Army, Navy and Air Force computing centers.

In this connection, an entirely new digital data system has been developed as a result of the experience gained in monitoring techniques. This unit is known as the Dymec Digital Data System.

This automatic Doppler shift count-out mechanism provides high speed tape punch readout. It permits readout of real time versus Doppler shift frequency in steps of one second readout rates. The equipment is built by Dymec div. of Hewlett-Packard.

Equipment, Studies

The Radiquad antennas (see photo) built by Radiation, Inc., which are capable of rotating horizontally 360 degrees and vertically from 0 to 90 degrees, are used for tracking and taking telemetry data. American Electronics Laboratories' 60-ft tower antenna operates with VSWR (voltage standing wave ratio) no worse than three to one. Average gain is 5 db over the system's 50 mc to 1,000 mc range.

Other equipment includes Hallamore's 10-channel telemetry system, Sanborn's chart recorders, a 7-channel Ampex tape recorder, Nems-Clark receivers for general coverage (55 mc to 900 mc), and Nems-Clark telemetry receivers (225 mc to 260 mc). Interstate Electronics' tracking filters are used for taking Doppler information. The Yagi high-gain antenna is built by Telrex.

Studies being carried out include: effects of polarization and phase-front relationships of various types of tracking antenna arrays, including high-gain Yagis, stacked conical arrays and rotatable helices.

One as yet unexplainable phenomenon that occurred last December may be cleared up this December if it happens again. Vanguard I, Navy's grapefruit, still transmitting due to its solar converters which were designed and built at Ft. Monmouth, underwent a sudden decrease in the decay rate of its spin. One possible explanation: the particular angle of the earth's axis at this time may affect the earth's gravitational field.

Excellent career opportunities. Send resume to The Chief Engineer

7 benefits for you with trio labs' **BUILD-IN** *concept*

By *designing-in* **trio** miniature panel-mounting instruments into operating and testing equipment, you . . .

- customize both your test set-up and instruments
- save space (average **trio** model is 4" x 4" x 4")
- save time: at-a-glance sequential or continuous monitoring
- save money: exclude unnecessary instrument functions, ranges
- make monitoring foolproof: read "go/no-go" by switching
- improve testing efficiency and system reliability
- increase overall design freedom



BEFORE . . . 3 external instruments were used to measure AC and DC voltages . . . cluttered, tedious, wasteful, subject to error.



AFTER . . . 3 **trio** VTVMs integrally built-in now are always on hand to measure just the parameters you designate.

3 ways you can use Trio Labs' pioneer know-how . . .

1. choose from **trio's** complete line of "standard" models.
2. select a "special" already produced—and you save the engineering time and money that went into it.
3. consult us for design specific to your own needs.

Write for free "how to" Engineering Guide to Dept. E-9 *Trio Laboratories, Inc., New York. When ordinary instruments are too big or inadequate*

PLAINVIEW, LONG ISLAND

trio

NEW YORK

GOOD-ALL CAPACITORS ASSURE

Circuit Stability

in ELECTRONIC ORGANS

GOOD-ALL 600UE, one of the types specified by leading manufacturers, excels in capacitance stability with life and has extremely high humidity resistance.

For these same reasons the 600UE has rapidly gained an excellent reputation for use in a wide range of fine instruments including oscilloscopes, professional quality recorders and closed circuit TV chains.

This premium capacitor costs surprisingly little more than conventional paper dielectric types.

SPECIFICATIONS

Construction . . . Mylar* dielectric molded in Epon** epoxy. Extended foil winding.

Stability with life . . . . . Less than 1% change after 10,000 hours under full rated conditions.

Insulation Resistance . . . Greater than 60,000 meg. x mfd. at 25°C, but need not exceed 180,000 megohms.

Temperature Range . . . Full rating —55°C to +85°C; to 125°C with 50% derating.

Voltage Ranges . . . 100, 200, 400 and 600 V.D.C.

Capacitance Tolerances . . . Standard tolerances ±20%; also available in ±10% and ±5%.

* DuPont's trade name for their space-saving polyester film.

** Shell's trade name for their epoxy resin plastic molding compound.

Write for detailed specifications.

Some of the well known Electronic and Electric Organ manufacturers who specify Good-All Capacitors.

ALLEN

Allen organs

CONN

CONN ORGAN

LOWREY

WURLITZER

WURLITZER

The 600UE and other popular Good-All Capacitors are now available at AUTHORIZED DISTRIBUTORS

Good-All CAPACITORS

Good-All is a leading Manufacturer of Tubular, Subminiature Electrolytic and Ceramic Disc Capacitors.

GOOD-ALL ELECTRIC MFG. CO. OGALLALA, NEBRASKA

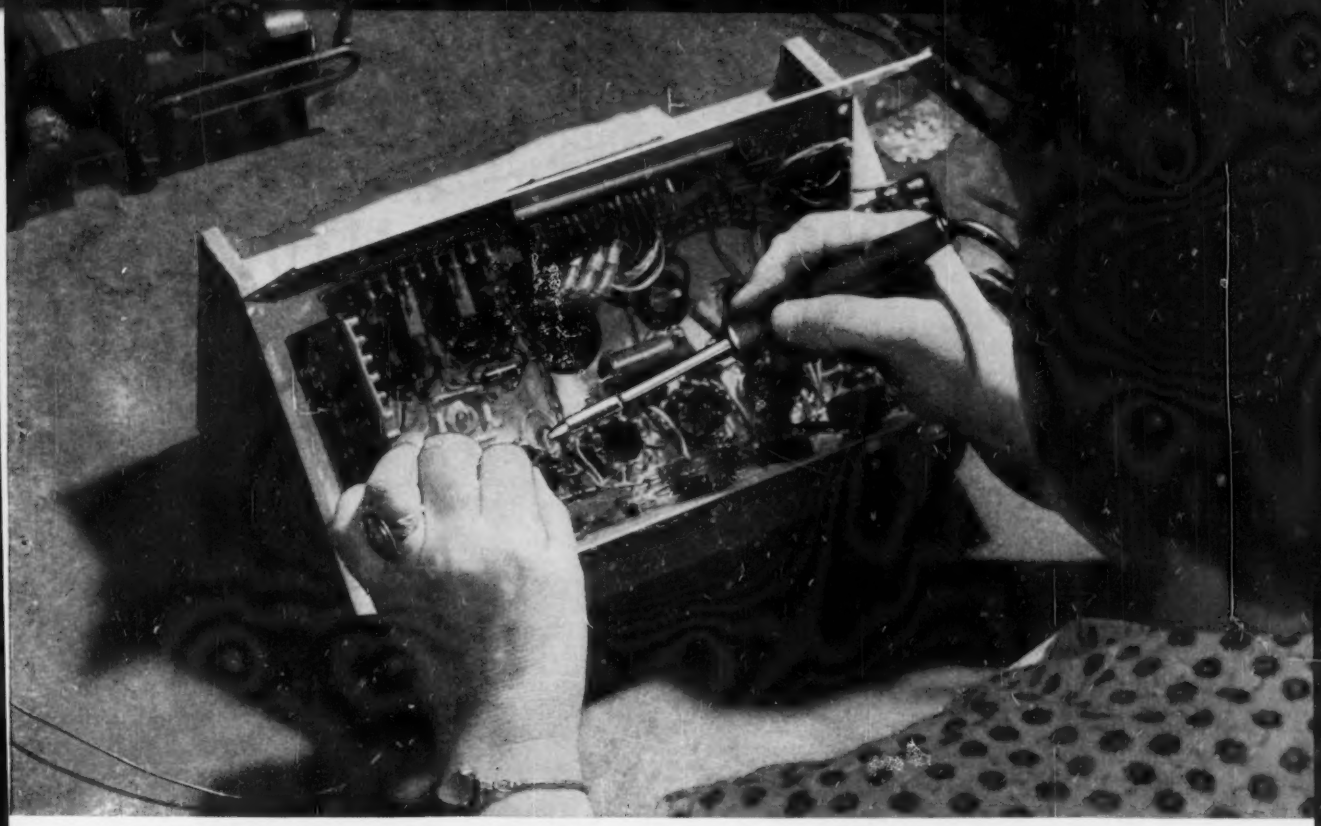

HARD-TO-REACH JOINTS in Sanborn Co.'s electro-cardiographs are soldered quickly with the fine-point G-E Midget iron—with no damage to adjacent parts. Weight of iron—less than 3 ounces—helped increase output by reducing operator fatigue. The Midget's ironclad-copper tip saves Sanborn ½ hour cleaning and tinning time daily, per operator station.

Sanborn speeds assembly 13% with G-E Midget iron, a small soldering iron with big-iron efficiency

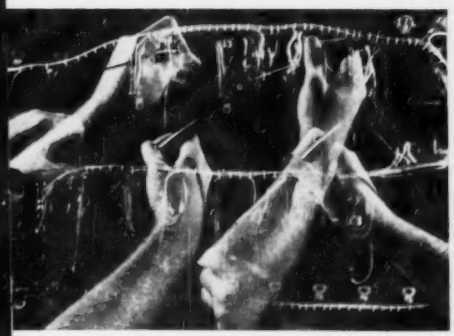

FASTER HEAT RECOVERY and lower maintenance of G-E soldering irons have been proved by many manufacturers under their own production conditions—along with competitive soldering irons. If you would like to compare General Electric irons with the irons you are now using, call your G-E distributor.

DELIVERY TODAY is now possible on popular soldering irons and other General Electric heaters and devices from a local distributor near your plant. Your replacement inventory may be reduced. For the name of your nearest stocking distributor for G-E heaters and devices, call your General Electric Apparatus Sales Office.

SAVINGS ACHIEVED by several users and information about the construction features of General Electric soldering irons are included in a new bulletin, "Save While You Solder," GED-3553. For a copy, call your G-E distributor or write Section 724-9, General Electric Company, Schenectady 5, New York.

GENERAL ELECTRIC

CIRCLE NO. 43 READER SERVICE CARD

New from Superior Tube . . .

ALL-PURPOSE CATHODE ALLOY

. . . for pulse application

. . . or continuous signal

THIS IS X-3012* . . . first cathode alloy to do every job well. Use it where you want a passive alloy. It has greater emission capacity. Use it where you want an active alloy. It gives longer life. And look at these other characteristics:

1. Both sublimation and interface impedance reduced practically to the vanishing point
2. Has twice the hot strength of ordinary nickel alloys
3. Longer sustained life even under high current conditions and with overvoltage abuse
4. Good cathode coating adherence
5. Cathodes available from both air-melted and vacuum-melted material

Alloy X-3012 was developed in the electronic laboratories of Superior Tube. It is a combination of nickel, tungsten and zirconium . . . selected from a wide range of different heats as having the most effective proportions of these three metals. Available now in lockseam, lapseam, and Seamless/Weldrawn® cathodes. Write for a detailed technical report. Superior Tube Company, 2500 Germantown Ave., Norristown, Pa.

**U.S. Patent No. 2, 833, 647 (Superior Tube Co.)*

Superior Tube

The big name in small tubing

NORRISTOWN, PA.

Johnson & Hoffman Mfg. Corp., Mineola, N.Y.—an affiliated company making precision metal stampings and deep-drawn parts

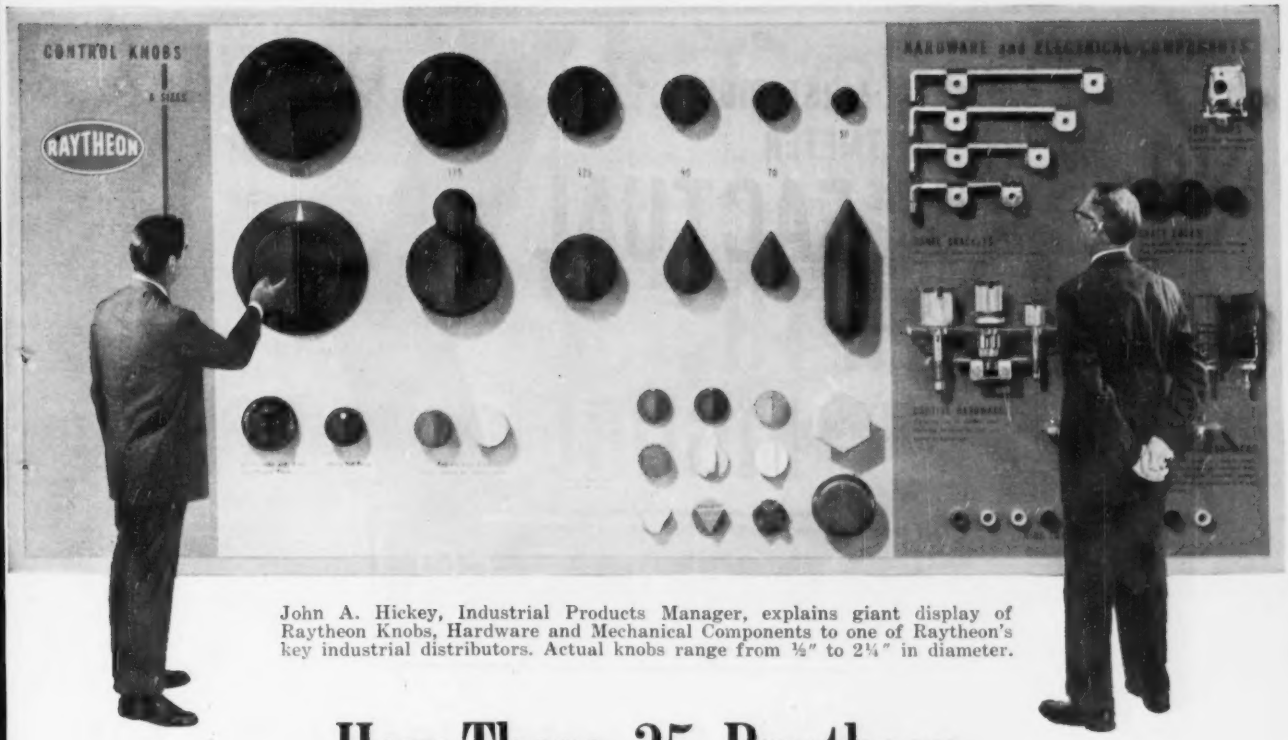

John A. Hickey, Industrial Products Manager, explains giant display of Raytheon Knobs, Hardware and Mechanical Components to one of Raytheon's key industrial distributors. Actual knobs range from ½" to 2¼" in diameter.

How These 35 Raytheon Knobs Solve 35 x 10^6 Control Problems

Raytheon offers the most complete line of knobs available to meet all requirements. Raytheon's knobs are handsomely styled to complement the finest electronic equipment. They are molded of Tenite II with inserts of anodized aluminum and two Allen head set screws. Raytheon knobs are designed to meet commercial and military applications. Colors are available and most knobs come in both mirror and matte finish.

One Source—These knobs plus a complete line of hardware and mechanical components are offered by Raytheon Industrial Distributors. In addition, Raytheon distributors offer complete availability on industrial tubes, voltage regulators, transistors and diodes, receiving tubes and cathode ray tubes. Whatever electronic components you need, your local Raytheon Industrial Products Distributor can supply them. You pay no penalty in price, and get faster service from complete local stocks on *all* Raytheon products they sell. If you don't know your nearest Raytheon Distributor, write to John Hickey, Industrial Products Manager, at the address below.

RAYTHEON COMPANY • DISTRIBUTOR PRODUCTS DIVISION

RAYTHEON

Raytheon Distributors Serving Key Markets Include:

Baltimore, Md.
Wholesale Radio Parts Company
Birmingham, Ala.
Forbes Distributing Company
Boston, Mass.
DeMambro Radio Supply Company
Burbank, Cal.
Valley Electronic Supply Company
Chicago, Ill.
Newark Electric Company
Cleveland, Ohio
Main Line Cleveland, Inc.
Pioneer Electronic Supply Corporation
Dayton, Ohio
Srepco, Inc.
Denver, Colo.
Ward Terry & Company
Detroit, Mich.
Ferguson Electronic Supply Company
Inglewood, Cal.
Newark Electric Company
Kansas City, Mo.
Burstein-Applebee Company
Knoxville, Tenn.
Bondurant Bros. Company
Los Angeles, Cal.
Kierulff Electronics Corporation
Milwaukee, Wis.
Electronic Expeditors, Inc.
Mobile, Ala.
Forbes Electronic Distributors, Inc.
New York City
Arrow Electronics, Inc.
H. L. Dalis, Inc.
Milo Electronics Corporation
Oakland, Cal.
Elmar Electronics
Philadelphia, Pa.
Almo Radio Company
Phoenix, Ariz.
Radio Specialties & Appliance Corporation
Portland, Ore.
Lou Johnson Company
Tampa, Fla.
Thurow Distributors
Tulsa, Okla.
S & S Radio Supply
Washington, D. C.
Electronic Wholesalers, Inc.

This is a partial listing only. Names of other Raytheon Industrial Distributors on request from John Hickey, Raytheon Distributor Products Division, 55 Chapel St., Newton 58, Mass.

CIRCLE NO. 45 READER SERVICE CARD

FIRST DIGITAL VOLTMETER WITH THE FACTUAL FIFTH FIGURE

+9 6.4 3 8

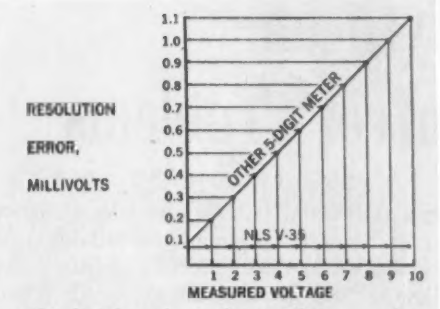

This chart shows the significant resolution error that results in other five-digit meters as compared to the NLS V-35 with the *factual fifth figure.*

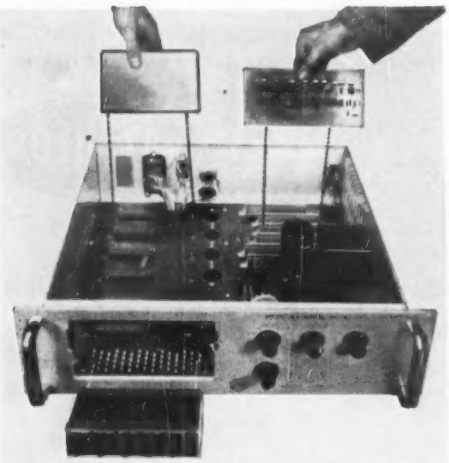

Compact, plug-in design of the NLS V-35

The All-Transistorized NLS V-35

Here for the first time is a *true* five-digit voltmeter with a factual fifth figure. Increased accuracy of *full* five-digit resolution – 0.001% – results from the new mathematically perfect logic of the NLS V-35.

Other five-digit digital voltmeters require "desensitizing" to prevent oscillation of the least significant digit. This results in a resolution error of three to nine digits in the upper portions of each range as graphically displayed in the chart to the left. This comparison clearly shows the increased accuracy of the NLS V-35, made possible by full five-digit resolution.

In new logic . . . in all-transistorized circuitry, including logic . . . in new simplified design with *plug-in* circuit boards, *plug-in* oil-bathed stepping switches, and *snap-in* readout . . . the NLS V-35 leads its field. Write today for complete information.

NLS V-35 Specifications

Measures Voltage from ±0.0001 to ±999.99, Ratio from ±.00001 to ±.99999 . . . 10 Megohm Input Impedance . . . 0.01% Accuracy . . . Automatic Selection of Range and Polarity . . . And Measures Three Times Faster Than Any Other Stepping Switch Instrument.

Originators of the Digital Voltmeter

non-linear systems, inc.

DEL MAR (San Diego), California

NLS — The Digital Voltmeter That Works . . . And Works . . . And Works!

Training Men for Overseas

Language and custom studies are stressed for engineers going abroad. Companies say technical interests help to provide a common ground

AMERICAN ELECTRONICS FIRMS are doing a good job of training employees they send overseas—even though flurries in Washington this month concerning the image of U. S. people aboard tend to cloud the picture.

Spokesmen for a number of electronics manufacturers say the advance training given to men going to other countries is becoming increasingly important.

Anticipated growth of markets in Latin America, increasing competition from Europe's Common Market nations and the general "shrinking" of today's world provide ready incentives to educate overseas personnel, they say.

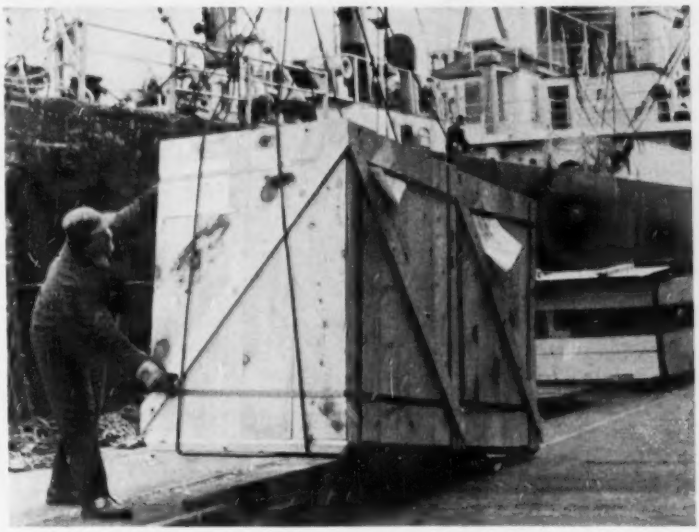

Foreign commerce means more than goods—it also means good will

Approaches Vary

ELECTRONICS interviews show that many firms, both large and small, have organized training programs for employees going abroad.

A series of short-duration trips with nationals of host nations is part of the Westinghouse approach to an overseas career.

In this way, the new man absorbs the ways of the country in small doses. Once the man and the country have proved they are compatible, a series of intensive language courses is started.

In addition, the man is encouraged to spend as much time as possible with people from the land he is going to. The firm prefers technically trained men who have been in its employ for some time. In seeking such men, the company feels the internationally-minded engineer will make his interest known.

Working overseas is considered a privilege—and care is taken to weed out the man who won't get along in the new environment.

The short, preliminary trip is also used by General Electric as a means of acquainting company personnel with overseas assignments.

The men also go to Berlitz language schools, receive intensive lectures, see films and read extensively about the place they're headed for. The company feels that the man going abroad must be the type who will add something to the country, rather than just live there in isolation.

Men chosen for overseas posts must demonstrate technical competence and an ability to get along with people. Lack of either quality usually disqualifies him, say company officials.

Wives Play a Part

Married men going abroad for RCA find that their wives can be a major factor in success or failure at the new assignment.

For this reason, the wife receives the same language courses and training her husband gets, with the company paying the bill. Preference is given to technically-proficient men capable of absorbing the language and customs of their future neighbors. Men sent abroad usually go in teams which include personnel already familiar with the country.

The Business Council for International Understanding, which urges greater participation by American businessmen in overseas training, has a dozen electronics firms as members. BCIU sets up courses and provides special aids to men going abroad.

In supporting the work of the council, Meade Brunet, RCA executive, points out companies can sustain losses due to inadequate preparation for overseas assignments. He also stresses that enrollment in training programs will not only benefit foreign operation, but will enable the U. S. business community to help its nation.

Universal Language

Managers of overseas divisions of electronics firms interviewed by ELECTRONICS were quick to point out that the electronics engineer has an edge over many other men going abroad to work.

"The language of our industry is a common one all over the world," said one major manufacturer. "Two competent men going over a schematic drawing are joined in reading an international language and sharing a common interest, no matter what nation they come from."

Protective packages for aircraft and missile instruments, computers, chemical glassware, and various guidance missile devices, are among custom-molded urethane foam containers developed by Standard Plastics, Inc., for new needs of industry.

. . . says C. D. Snelling, president, Standard Plastics, Inc.

"Our custom-molded urethane foam packaging saves our clients as much as 30% in costs, reduces bulk by one-third and weight by 75%," states Mr. Snelling.

"We proved to our customers that urethane foam has a definite place in the packaging field," he adds, "and 1959 is proving to be the big year in this developing industry.

"The excellent energy absorption of urethane foam at low density and low compression set is supplemented by the economy of this material in terms of cost, space and weight savings. For example, our foam package for magnetron tubes replaced a wooden packing case with rubberized hair at a cost saving of 30%, a cube space reduction of 85% and a weight saving of 65%. This means a reduction of 55 cubic feet per tube package and 157 pounds per unit—pretty important figures to a shipper!

"The no-dust feature of urethane foam is also very important in packaging sensitive instruments and components," says Mr. Snelling. "And the low moisture content (.3%) makes urethane foam virtually chemically inert as well as affording corrosion resistance to silvered surfaces and the like."

Standard Plastics, Inc., was formed in 1954 to mold urethane foam products exclusively. Recently a new 16,000 square foot plant was opened in Fogelsville, Pa., which, incidentally, has urethane foam-lined office interiors for temperature and sound insulation.

Write Mobay for other examples of how urethane foam specialists are working with industry to improve the profits and potential of new products.

MOBAY
CHEMICAL COMPANY
Dept. L-1 • Pittsburgh 34, Pa.

Mobay is the leading supplier of quality chemicals for the manufacture of both polyether and polyester urethane foams.

MOBAY
First in Urethane Chemistry

only CMC makes a

solid state
DIGITAL PRINTER

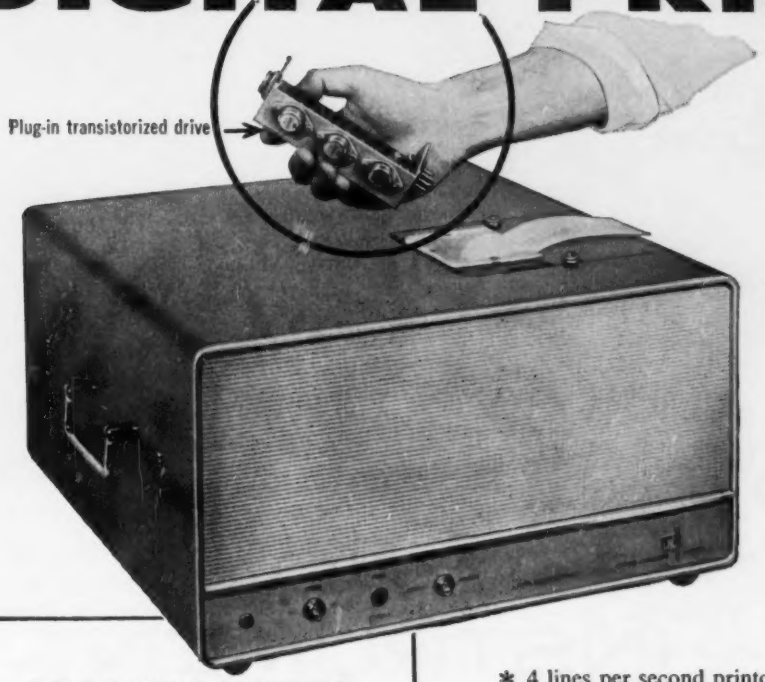

Announcing the 400 CT -

The most versatile digital printer ever made

SPECIFICATIONS

Printout capacity	6 digits standard.
Accuracy	determined by basic counting instrument.
Display time	0.2 seconds minimum, maximum controlled by the counter.
Weight	60 lbs.
Power requirements	115 volts ±10%, 50-60 cps 25 watts
Dimensions	17" W x 8½" H x 16½" D. (Rack mounting available as option D.)
Warranty	One year on electronics; 1.5 million lines @ 4 lines per second on matrix; 10 million lines @ 4 lines per second on printer assembly, or 1 year, whichever occurs first.
Price	$1350.00. Add $10.00 for rack mount.

* 4 lines per second printout * Takes 1-2-2-4 or 1-2-4-8 four line code * No stepping switches * Operates from only 6 volt input * Parallel entry * Special options available including 10 line and analog output * 6 digit printout, up to 12 digits on special order * Rugged unitized construction * Completely compatible with CMC's new solid state frequency-period counters, and other types of transistorized counting equipment.

For a demonstration of this remarkable new printer and complete technical information, call your nearby CMC engineering representative or write to us direct. Please address Dept. 189.

CMC

Computer-Measurements Company *A Division of Pacific Industries, Inc.*

12970 Bradley Avenue • Sylmar, California

Phone: EMpire 7-2161

CIRCLE NO. 49 READER SERVICE CARD

VR 9-43

VR PRECISION INSTRUMENT COUNTERS

Assure Top Reliability and Accuracy for Instrumentation

Veeder-Root's long experience in the design, development and production of intricate, miniaturized counting devices gives you that extra margin of dependability whenever instrumentation requires digital readout. In fact, Veeder-Root makes the most extensive and varied line of instrument-type counters in the world!

There's another Veeder-Root specialty of importance, too — application ingenuity. Whatever your instrument problem or requirement,

Make Instruments Do More With These Veeder-Root Counter Types: PREDETERMINED • ELECTRONIC • MAGNETIC

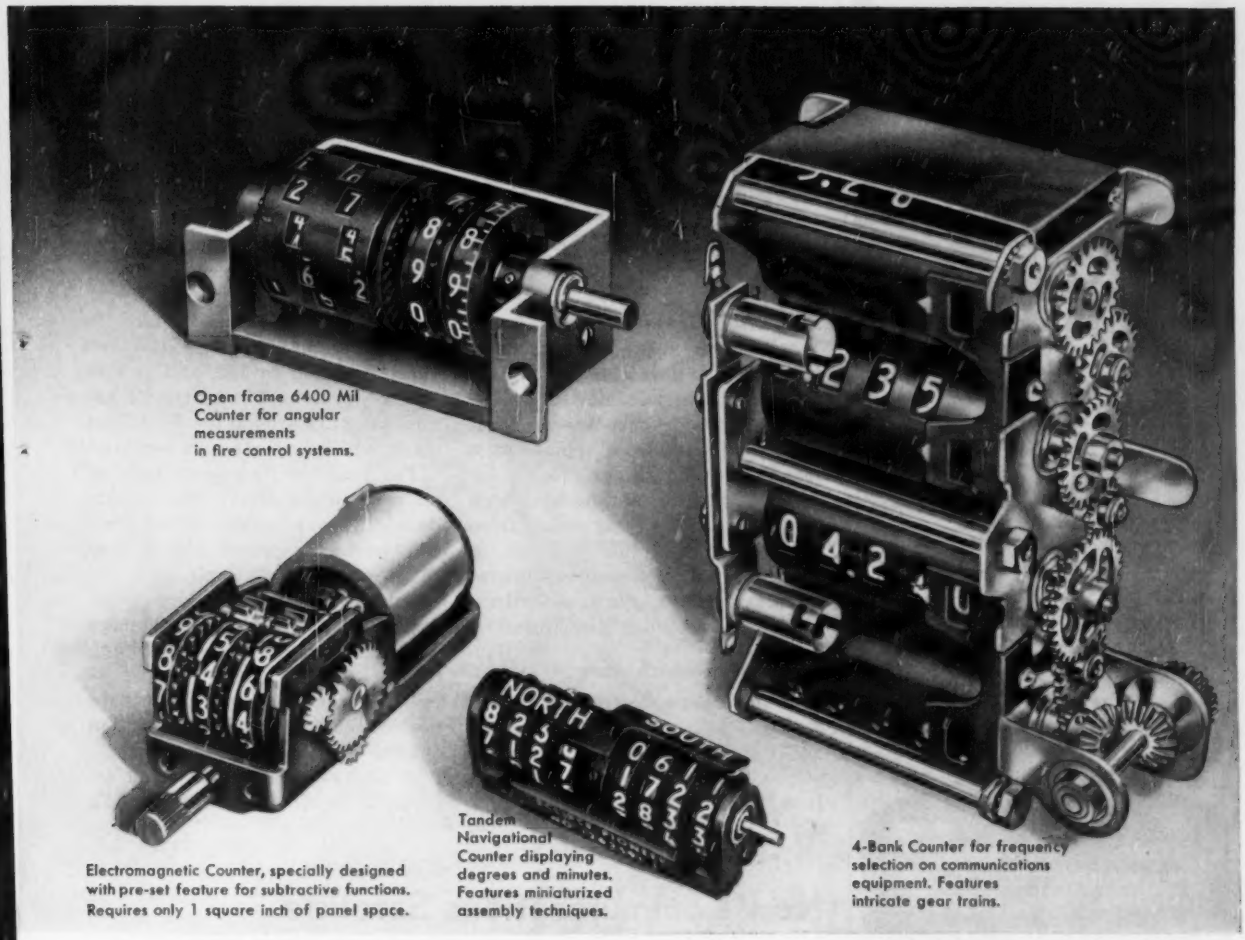
Open frame 6400 Mil Counter for angular measurements in fire control systems.
Electromagnetic Counter, specially designed with pre-set feature for subtractive functions. Requires only 1 square inch of panel space.
Tandem Navigational Counter displaying degrees and minutes. Features miniaturized assembly techniques.
NORTH
SOUTH
4-Bank Counter for frequency selection on communications equipment. Features intricate gear trains.

Veeder-Root can provide the answer by supplying a single device or a complete counting "package" to fit your system.

The Veeder-Root Counters shown here are only a small selection of the specialized line of precision counters developed for instrument and military applications. Each demonstrates Veeder-Root's ability to design and produce to high precision, fine tolerances, and military specifications, and to satisfy severe environmental testing requirements.

Send Us Your Requirements Now . . . Take full advantage of Veeder-Root's extensive Counter know-how to help improve the accuracy and reliability of your instrumentation or system. Contact your local Veeder-Root Counting Engineer or write direct.

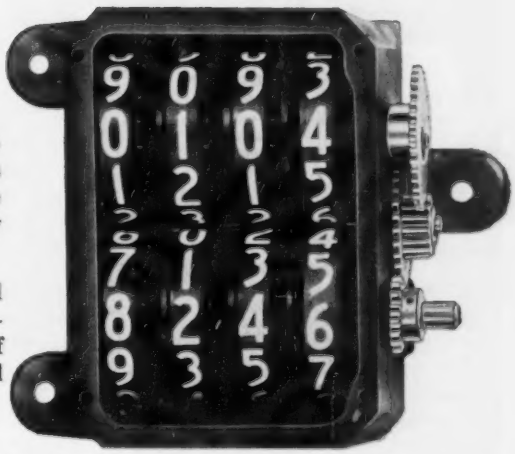

Dual Counter device for communications equipment. Features intricate assembly and gearing.

Veeder-Root INC.

Hartford 2, Connecticut

"The Name that Counts"

Hartford, Conn. • Greenville, S. C. • Altoona, Pa. • Chicago • New York • Los Angeles
San Francisco • Montreal • *Offices and Agents in Principal Cities*

• GEAR DRIVEN • AUTOMATIC RESET • REMOTE DATA READOUT • COUNT-PAKS • REVOLUTION • DEGREE

COLUMBUS ELECTRONICS CORP.

DOUBLE DIFFUSED SILICON RECTIFIERS



Now . . . an extensive line of high performance, hermetically sealed, silicon power rectifiers UP TO 35 AMPS. JEDEC types exceeding MIL specifications.

NEW

SINGLE unit VERY HIGH VOLTAGE silicon rectifiers exhibiting these desirable characteristics . . .

HIGH VOLTAGE up to 2000 PIV	LOW FORWARD DROP 1.5 Volts, DC
EXTREMELY LOW LEAKAGE 1 μA	FORWARD CURRENT up to 20 Amps.

NEW

INSULATED STUD silicon rectifiers offering these quality features . . .

- Simplify mounting
- Saves assembly parts & costs
- Obtain efficient heat transfer
- Give greater design flexibility

AVAILABLE UP TO 10 AMPS PER UNIT AND UP TO 2000 VOLTS PIV.

WRITE FOR FULL DETAILS

COLUMBUS ELECTRONICS CORP.
1010 SAW MILL RIVER RD., YONKERS, N. Y.
YOnkers 8-1221 • TWX-Yonkers, NY-1369

Industry Grows In

Here's a report from Portland, Ore.—'City of Roses'—where electronics is blooming, too

PORTLAND, ORE.—THIS METROPOLITAN AREA of about 800,000 people will probably never become a giant Los Angeles-style center of our industry. But a post-Wescon visit to the "City of Roses" points up a few interesting things.

First of all, the flowers have been getting a run for their money from the growing electronics business, in the form of oscilloscopes, microminiature relays, gyros, potentiometers and precision transformers.

Growth Rate

In the last two years, the growth rate of Portland's handful of small and medium-sized electronics companies has been prodigious. The Iron Fireman Mfg. Co.'s Electronics division has more than doubled its number of employees in the last year from 250 to 550, and is still hiring workers. The division's annual sales are around the $5-million mark, with prospects even brighter.

For example, its current sales of microminiature relays are running double last year's sales, which were themselves 50 percent higher than the previous year's levels.

Osborne Electronics Corp., with some 300 employees, about 100 more than last year, is currently doing business at an annual rate of $3 million. The firm reports its main problem now is "getting production out the door."

A large oscilloscope manufacturer, Tektronix, typifies Portland's

New Communications Satellite

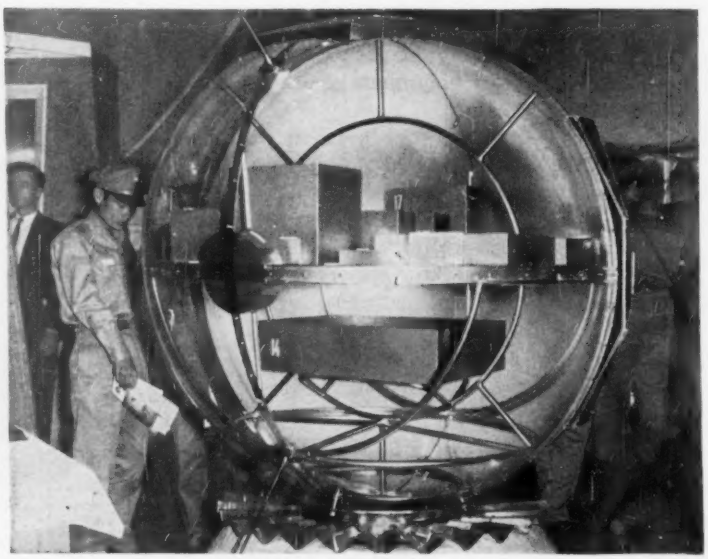

Full-scale mockup of Signal Corps' Courier communications satellite was shown for the first time at Fort Monmouth's open house recently. Scheduled for a spring launching, the satellite will serve as a teletypewriter relay station in Army's worldwide communications network. Philco is building the payload—a mechanism for receiving, storing, and when instructed from the ground, transmitting messages. ITT is building the ground equipment which uses Radiation, Inc.'s antenna

Northwest

growth. The firm added 1,200 new people to its payroll last year, bringing the total to 3,000. Tektronix also built a new plant to house its employees, is now constructing a ceramic-parts processing plant, plans still more expansion.

Company employees' retirement fund owns 300 acres of land and an expandable warehouse, and fund trustees want to get in on the Rose City's growth by developing the land into an industrial park.

Keyed to Aircraft, Missiles

A second point apparent to an observer in Portland is that many small electronics plants here depend very heavily on the big aircraft and missile contractors along the West Coast for their component and instrument sales. This business is almost all military now, but commercial jet airliners are a new and promising market.

Emphasis by some firms on microminiature components seems to jibe with the thinking of top electronics men. For instance, Herbert York, Defense Department's director of research and engineering, told the closing Wescon luncheon that microminiaturization of equipment will be useful even if experts don't immediately know what for. "Intuition tells you some developments are a good thing," he said.

The right intuition and continued fat orders from big defense contractors should keep the fortunes of small firms in this part of the country moving up.

One company making sensitive advanced components for operational missiles is selling more advanced ones for developmental missiles, thinks its newest units will anticipate the sophistication of weapons systems now only being planned.

If such products also successfully anticipate demand for microminiaturization of commercial and industrial products, the lily will have been painted—Portland's roses notwithstanding.

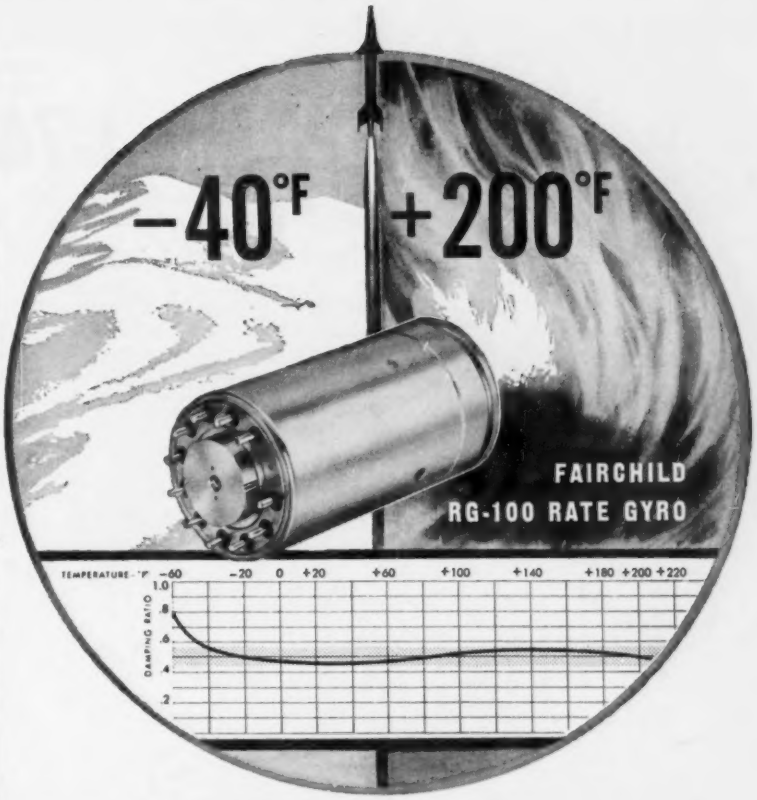

Fairchild's Sub-Miniature Rate Gyro Has FULLY CONTROLLED DAMPING

Only Fairchild's Rate Gyro—has uniform, constant damping for any required percentage of critical within ±15% and over the entire operating temperature range of —40° to +200°F. This is accomplished by varying the damping area, using the damping medium as a sensing device which varies with temperature changes.

TAKES 100 g's OF SHOCK

Only Fairchild's Miniature Rate Gyro takes 100 g's of shock and 15 g's at 2000 cps vibration even at rates as low as 20° per second. This high shock resistance is due in part to Fairchild's exclusive design feature which does not require the torsion bar to act as a supporting medium.

OTHER FAIRCHILD OUTSTANDING CHARACTERISTICS

INPUT RATES (Full Scale)	±20 to ±800 degree/second	OUTPUT	6 volts, 400 cps, phase sensitive
SIZE & WEIGHT	15/16" dia. x 2" long — 2 ounces	LINEARITY	0.1% to half scale 3.5% to full scale
MOTOR	2 or 3 phase; 6.3V or 26V AC	NULL	15 to 40 mv total depending upon maximum rate and damping.

For more information write Dept. 22E

RELIABILITY INSIDE THE BLACK BOX

FAIRCHILD CONTROLS CORPORATION

COMPONENTS DIVISION

225 Park Avenue, Hicksville, L. I., N. Y. — 6111 E. Washington Blvd., Los Angeles, Cal.

Potentiometers • Gyros • Pressure Transducers • Accelerometers

A Subsidiary of Fairchild Camera and Instrument Corp.

Developed specially for the new "B" revision of MIL-I-7444, Resinite EP-93C is transparent and colorless (no amber tint). Here is a brand new material embodying all the superior characteristics of Resinite specification grade insulation sleevings – and more. Now there is a Resinite material for all Types (transparent, tinted or colored) and all Size Ranges of this important specification. Ask your Resinite Distributor for complete information or write for samples and performance data.

- *Smoother, harder surface facilitates installation*
- *Flexible at –90° F*
- *Withstands 185° F continuously*
- *Flame Resistant*
- *Fungus Resistant*
- *All 3 types and size ranges*
- *Transparent, amber, black, white, and red*
- *Exclusive "Soft-Wound" spooling assures full-round sleeving*

Whatever your insulation sleeving problem, there's an appropriate Resinite material. Call your Resinite distributor or write for samples and performance data.

®Resinite

THE *Borden* CHEMICAL COMPANY Resinite Department

Plants: Santa Barbara, Calif. • No. Andover, Mass.

SPECIALISTS IN VINYL SLEEVING AND TUBING FOR THE AIRCRAFT, ELECTRONICS, ELECTRICAL AND PHARMACEUTICAL FIELDS

the new look in 50 and 100 ampere electrical connectors!

Supercon ELECTRICAL CONNECTORS

incorporating the first really all-new design in single conductor plugs and receptacles

All current-carrying metal parts are machined of high-grade brass and gold-plated for stable electrical contact and resistance to corrosion.

All plastic parts are molded of durable nylon for excellent resistance to corrosive chemicals, heat, oil and grease, abrasion and impact, chipping and cracking.

Pin plugs quickly assembled with a single nut after cable connection.

SOCKET RECEPTACLE

PIN PLUG

Receptacle caps and bodies are color-matched for quick circuit identification in front and back of panel.

Positive-grip, functionally designed plugs provide best handling ease and convenience.

Plugs can be connected to a range of cable sizes by fastening screws or by soldering.

PIN RECEPTACLE

SOCKET PLUG

Wide variety of colors permits greater latitude in patchcord distribution layouts.

Socket plug grips are of a simple, two-piece threaded construction for quick assembly.

Six distinctive colors!

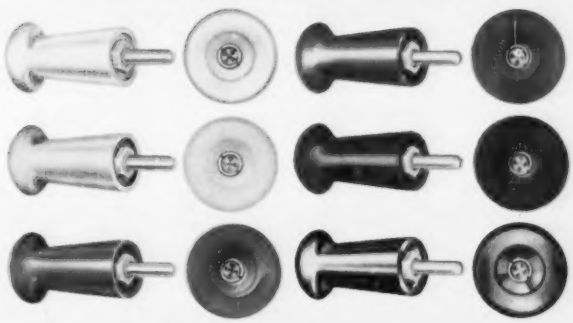

THE SUPERIOR ELECTRIC COMPANY

Bristol, Connecticut, U.S.A.

Supercon ELECTRICAL CONNECTORS

for • laboratories • factories • classrooms • testing facilities • research and development centers

REQUIRE 1" PANEL HOLE
1/4" MAXIMUM PANEL THICKNESS

50 AMPERE TYPES

REQUIRE 1 3/16" PANEL HOLE
1/4" MAXIMUM PANEL THICKNESS

100 AMPERE TYPES

MAXIMUM FLEXIBILITY of power supply boards and distribution panels . . . mobile and portable equipment can be transported to any location . . . stationary patchboards provide centralized control location.

EQUIPMENT SAVINGS are made possible by utilizing one piece of apparatus to do the work of many . . . installation of costly permanent switching gear and wiring is minimized.

RAPID INTERCHANGE and interconnection of electrical apparatus permits many tests or operations to be made and changed in the quickest possible time — set-up time is decreased.

SAFETY AND EFFICIENCY are assured by low-resistance, fully insulated connections . . . circuits can be energized with safety to user and equipment . . . all metal parts recessed for maximum protection.

FAST... EASY... 2 STEP ASSEMBLY

	PIN PLUGS	SOCKET PLUGS	RECEPTACLES
1			
	Attach the cable to the pin plug with the two fastening screws or by soldering.	Slip the socket plug grip over the cable and attach the cable to the socket plug with the screws or by soldering.	After opening the panel hole, screw the cap and the base together securely.
2			
	Slip the grip over the pin plug and tighten in place with the assembly nut.	Screw the socket plug shield and grip together securely.	Attach the wiring by lug, clip-lead, wrap-around or by soldering.

THE SUPERIOR ELECTRIC COMPANY, Bristol, Connecticut

☐ Please send SUPERCON Bulletin.

☐ Please have your representative call.

name

company

address

city zone state

... FOR YOUR FILES

Request SUPERCON Bulletin giving full technical information, ratings and specifications.

THE SUPERIOR ELECTRIC COMPANY
Bristol, Connecticut, U.S.A.

Electronic test and maintenance costs

REDUCED 90%

with the Tape-Programmed SUPERTESTER®

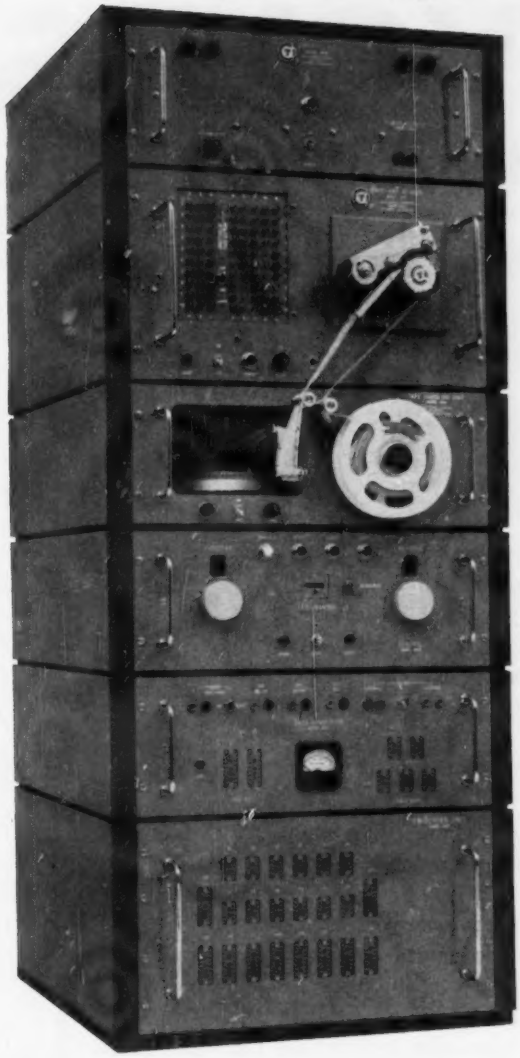

Drastically reduced test costs, increased equipment reliability and quality, incipient failures located during routine maintenance, decreased down time for vital equipment, production bottlenecks eliminated, no time wasted overhauling good units and needlessly replacing good components, exceedingly valuable in ground support—these are a few of the many reasons that CTI Supertesters are so widely used for all types of electronic and electrical testing from production to field maintenance. In making complete static and dynamic measurements on constituent circuits or in analyzing performance of entire systems, Supertesters have demonstrated time and again their advantages over other test methods.

Proved in over one year of use, the Model 180 Tape-Programmed Supertester is bringing a new versatility into automatic testing. With the accessory Tape Punch and Tape Duplicator, identical or revised copies of tapes can be made in seconds, an important feature where numerous design changes are of concern. Copies of tapes used by the original equipment manufacturer can be supplied for field use, always assuring that equipment is meeting the latest design specifications. In addition, lengthy test specifications are eliminated and the test instruments for a large variety of units are kept to a minimum —one CTI Supertester.

Write for complete specifications on the Model 180. A brief outline of your test requirements will enable us to advise you in more detail on the application of our testers to your needs. Related CTI products are the Model 165 Cable-Harness Analyzer, Model 176 card-programmed Component Tester, and Model 100 Supertester.

The new Model 180 Tape-Programmed Supertester has the same outstanding features that have made CTI automatic test equipment the leader in the field—high accuracy, go/no-go bridge measurements, widest scope of tests and auxiliary operations, and complete customer confidence in test results through fail-safe circuitry and self-testing ability.

Engineers: Career opportunities are currently available at CTI

CALIFORNIA TECHNICAL INDUSTRIES

DIVISION OF TEXTRON, INC.

BELMONT 8, CALIFORNIA

Foremost in Automatic Testing

←CIRCLE NO. 56 READER SERVICE CARD

CIRCLE NO. 57 READER SERVICE CARD 57

THE WIDEST RANGE OF CAM TIMERS AND TIME CYCLES

2/3 Seconds to 72 Hours in 600 steps

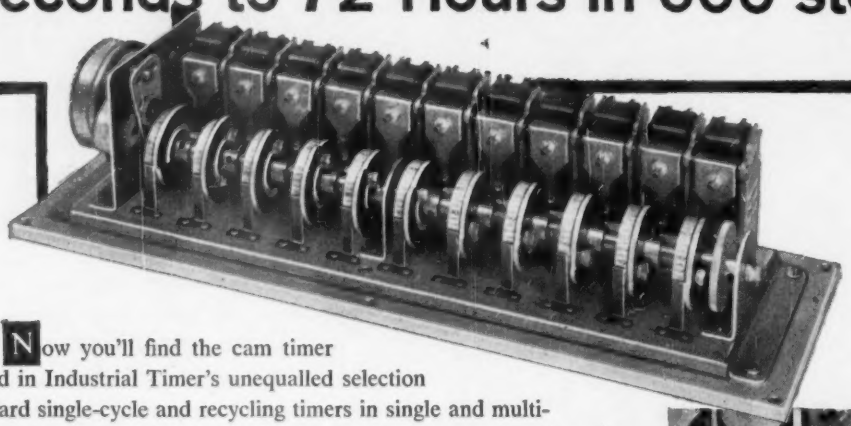

Now you'll find the cam timer you need in Industrial Timer's unequalled selection of standard single-cycle and recycling timers in single and multi-switch types (up to 50 switches). Every model gives you 50 different overall time cycles, ranging from its lowest cycle up to 9 times that cycle. And standard cam construction lets you adjust ON and OFF periods from 2% to 98% of the total time cycle. Here is unsurpassed flexibility in cam timer selection and function.



If you don't find the timer you want in this unmatched range (a highly unlikely possibility), Industrial Timer's unique Timer Kit will help provide the exact timer you need at low cost. With this kit you can design your own prototype, and since the kit components are standard in our line we can reproduce your prototype—in quantity—*at no extra cost.*

For fast delivery on a standard or special Cam Timer check first with Industrial Timer. For more information ask for *Bulletin 200* Synchronous Motor Driven Cam Timers, *Bulletin 201* Multi-Cam Timer Kit, *Bulletin 202* Multi-Cam Switching Devices.

Industrial Timer's complete line of timers also includes: Time Delay Timers, Interval Timers, Running Time Meters, and Programmers. Bulletins describing these are available on request.

Timers that Control the Pulse Beat of Industry

INDUSTRIAL TIMER CORPORATION

1409 McCARTER HIGHWAY, NEWARK 4, N. J.

Explorer VI Transmitting Well

Satellite reveals a larger concentration of low-energy particles in space than expected

EXPLORER VI data is proving to be "better than satisfactory," in the words of George E. Mueller, vice-president of Space Technology Laboratories, which is responsible for scientific direction of the satellite project.

Mueller says the "telebit" telemetry system of Explorer VI has reported a larger concentration of low-energy particles in space than previously postulated. Data in higher energy density corroborates the Van Allen observation.

Energy level of the particles is 200,000 electron volts. He disclosed that the satellite's solar power level is slightly lower than anticipated but it's hoped that it will last a year. One dust particle has been counted for every 100 million cu ft of space during the satellite's orbit which carries from 134 mi perigee to 22,000 mi apogee.

The "telebit" digital unit aboard Explorer VI both stores and calculates before transmitting totalled data to earth on completion of a predetermined cycle. This data includes cosmic radiation, magnetic fields, radiowave propagation, solar corona density, ionization, micrometeorite flux and momentum.

Coded data picked up by a ground station is sent through a sensitive receiver before being demodulated, is then punched on teletypewriter tape to give an exact representation of the data recorded by the satellite's instruments. Taped information goes to a central computer which prints it out in chart or graphical form for evaluation by STL scientists.

Infrared Tracks Distant "Moons"

INFRARED SATELLITE TRACKER, above, developed by ITT, can detect artificial satellites thousands of miles above the earth.

The tracker uses a 19-in. concave mirror to collect the ir energy given off by satellites. This energy, caused partly by friction between a satellite and the thin atmosphere, or by rocket motor exhaust, is then focused on a sensitive detector, chilled to a temperature lower than −300 F.

The collector mirror oscillates and scans an area of the sky where the satellite is expected to pass. Shortly before the satellite is sighted, the tracker is set in motion and the satellite eventually catches up with the arc of the sky being scanned. A semiautomatic tracking device then keeps the tracker locked on the satellite.

"Distinct Improvements"

"If tests bear out our calculations," says F. H. Hall, Jr., ITT physicist, "the ir tracker will represent distinct improvements in reliability and production economy."

The tracker was developed for the Air Force to answer questions on the nature of ir radiation emitted by orbiting satellites. These questions are vital to space vehicle aerodynamics, atmospheric physics, space vehicle navigation and communication and space medicine.

The tracker also may have applications in missile-detection systems, if field tests show that missiles generate detectable ir radiation.

CIRCLE NO. 59 READER SERVICE CARD

Transitron offers...

INDUSTRY'S MOST COMPLETE LINE

SILICON TRANSISTORS

JAN TRANSISTOR		Minimum Current Gain (B)	Maximum Collector Voltage (Volts)	Typical Cut-off Frequency (MC)	Maximum I_{co} @ 25°C and V_c Max. (μa)	FEATURES
	JAN-2N118	10	30	10	1	• Only Jan Silicon Transistor

SMALL SIGNAL		Minimum Current Gain (B)	Maximum Collector Voltage (Volts)	Typical Cut-off Frequency (MC)	Maximum I_{co} @ 25°C and V_c Max. (μa)	FEATURES
	2N333	18	45	7	50	• Low I_{co} • Operation to 175°C • 200 mw Power Dissipation
	2N335	37	45	10	50	
	2N480	40	45	11	.5	
	2N543	80	45	15	.5	
	ST905	36	30	10	10	

HIGH SPEED SWITCHING		Typical Cut-off Freq. (MC)	Maximum Collector Voltage (Volts)	Maximum Collection Saturation Resistance (ohms)	Max. Power Dissipation @ 100°C ambient (MW)	FEATURES
	2N1139	150	15	60	500	• High Frequency Operation • Low Saturation Resistance • Low I_{co}
	2N337	20	45	150	50	
	2N338	30	45	150	50	

MEDIUM POWER		Max. Power Dissipation @ 25°C Case (Watts)	Maximum Collector Voltage (Volts)	Minimum DC Current Gain (B)	Typical Rise Time (μsec)	Typical Fall Time (μsec)	FEATURES
	2N545	5	60	15	.3	.5	• Fast Switching • High V_c • Rugged Construction
	2N547	5	60	20			
	2N498	4	100	12			
	2N551	5	60	20			
	2N1140	3	40	20	.2	.1	

HIGH POWER		Maximum Power Dissipation . . 25°C Case (Watts)	Minimum DC Current Gain (B)	Typical Collector Saturation Resistance (Ohms)	Maximum Collector Voltage (Volts)	FEATURES
	ST400	85	15 @ 2 Amps	1.5	60	• High Current Handling Ability • Low Saturation Resistance • Rugged Construction
	2N389	85	12 @ 1 Amp	3.5	60	
	2N424	85	12 @ 1 Amp	6.0	80	

Write for Bulletins: TE-1353 and TE-1355

SILICON DIODES

 FEATURES		Fast Switching and High Frequency Types Ratings @ 25°C				Military and High Conductance Types Ratings @ 150°C			
		Max. Inverse Voltage (Volts)	Max. Average Fwd. Current, (ma)	Inverse Recovery Time (μsec)		Max. Inverse Voltage (Volts)	Max. Average Fwd. Current (ma)	Max. Inverse Current (μa) @ V
• Recovery Times Under 15 μsec • High Conductance Combined With Fast Switching • Subminiature Size • High Inverse Resistance	1N808	100	100	.3	JAN 1N457	60	25	5 @ 60
	1N809	200	100	.3	JAN 1N458	125	25	5 @ 125
	1N658	120	200	.3	JAN 1N459	175	25	5 @ 175
	1N659	55	100	.3	1N485B	180	50	5 @ 175
	1N643	110	100	.3	1N488A	380	50	25 @ 380
	JAN 1N251	30	75	.15	1N464	175	40	30 @ 125

Write for Bulletin TE-1350

SILICON RECTIFIERS

Ratings @ 150°C Case Temperature			Peak Recurrent Inverse Voltage (Volts)	Maximum Average Forward Current (ma)	Maximum Inverse Current (ma)	FEATURES
	Subminiature Glass	1N689 1N649	600 600	150 150	0.2 0.2 (@ 25°C)	• Reliability at High Temperatures • High Efficiency • Rugged Construction • Hermetic Sealing • Low Thermal Resistance
	Miniature	TJ60A TJ30A	600 300	200 200	0.5 0.5	
	Axial Leads	SL715 1N547	1500 600	100 250	0.2 0.3	
	Military	JAN 1N256	570	200	0.25 (@ 135°C)	
	Stud Mounted	TM155 TM67	1500 600	400 3000	0.5 0.5	
	Medium Power	TR402 TR601	400 600	Amps 20 10	5 5	
	High Power	TH402B	400	50	15	

Write for Bulletin TE-1351

SILICON REGULATORS AND REFERENCES



	Voltage Range (Volts)	Maximum Dynamic Resistance (ohms)	Maximum Current @ 25°C (ma)	@ 125°C (ma)	FEATURES
Subminiature — SV-5	4.3-5.4	55	50	10	• Long-term stability • Operation up to 150°C • Small size, easy mounting • Hermetically sealed
Miniature — SV-815	13.5-18	120	40	8	
Power — SV-924	20-27	8	55°C (amps)* .4	(ma)* 100	
Stabistor — SG-22	.64	40	150	25	
Reference — SV-3176	8-8.8	15	Temp. Coefficient ±.001%/°C		
Ref-Amp — 3N44	8.3-9.8		±.002%/°C		

*Case temperature ratings

Write for Bulletin TE-1352

SILICON CAPACITORS

	Ultra High Frequency Types — Ratings @ 25°C						FEATURES
	Cut-off Freq. (mc)	Capacity (μμf) @ V Max.	@ −0.1V	Q @ −4V @ 50Mc	@ 100Mc	Maximum Working Voltage	
SCH-51	5000	.35	2	100	50	10	• Subminiature Size • High Q • High Temperature Operation
SCH-52	5000	.8	4	100	50	7	

High Frequency Types						
				Q @ −4V At 5mc	At 50mc	
SC-1		4.4	24	350	35	22
SC-5		25	120	350	35	11
SC-15		120	360	350	35	6

Write for Bulletin PB-45

GERMANIUM DIODES

FEATURES

- Milli Microsecond Switching
- Superior Forward Conductance
- High Inverse Resistance
- Uniformity and Stability
- Gold Bonded Construction

Specifications and Ratings at 25°C	Forward Current @ +1V (ma)	Inverse Current at Specified Voltage (μa @ V)	Max. Oper. Voltage (volts)	Description
JAN-1N270	200	100 @ −50	80	JAN TYPES
JAN-1N277	100	250 @ −50 @ 75°C 75 @ −10	100	
JAN-1N281	40	500 @ −50 30 @ −50	60	
JAN-1N126	5	500 @ −50 30 @ −10	60	
JAN-1N198	5	250 @ −50 @ 75°C 75 @ −10	50	
1N283	200	20 @ −10	20	COMPUTER TYPES
T16G	40	100 @ −50	60	
1N278	20	125 @ −50 @ 75°C	50	HI-TEMPERATURE TYPES
T22G	40	20 @ −10 @ 75°C	15	
T9G	100	20 @ −50 2 @ −10	60	HI-RESISTANCE TYPES
1N67A	5	50 @ −50 5 @ −5	80	
T8G	100	20 @ −100 5 @ −10	100	
S570G	10	30 @ 6	Recovery Time .002 (μsec)	MILLI-MICROSECOND SWITCHING

Write for Bulletin TE-1300 & TE-1319

GERMANIUM COMPUTER TRANSISTORS

	Minimum Current Gain (B)	Maximum Collector Voltage (volts)	Typical Cutoff Freq. (MC)	FEATURES
2N427	40	15	8	• High Frequency Switching • Low Saturation Resistance • Uniform Input Characteristics
2N428	60	12	13	

Your local authorized TRANSITRON DISTRIBUTOR now carries in-stock inventories for immediate delivery.

Transitron's TD series of rectifier stacks offer a wide range of ratings in seven standard circuit configurations. High voltage cartridges, quads, plug-in assemblies, and many other special encapsulations are also available. Your inquiries are invited.
Write for Bulletin TE-1342.



Transitron

electronic corporation • wakefield, massachusetts

CIRCLE NO. 61 READER SERVICE CARD

BIRD

"Thruline"
DIRECT READING
Directional
RF
WATTMETER

MODEL 43

An insertion type instrument used to measure forward or reflected power in coaxial transmission lines in the frequency range 25 to 1000 mc. Directional selectivity is accomplished by fingertip rotation of element to point arrow in direction of power to be measured. Calibration charts or full scale meter adjustments are not needed for this direct reading instrument.

The lightweight and portable Model 43 may be used on mobile or fixed equipment. It is recommended for accurate measurement of forward or reflected power... transmission line loss... insertion loss of components, such as filters, connectors, switches, relays, etc.... antenna matching work... continuous monitoring of transmitter output and... VSWR in complete systems in operation.

SPECIFICATIONS

Each model 43 Directional Wattmeter is made up of a line section, an indicating meter and plug-in measuring elements all contained in an aluminum case.

ELEMENTS: Available in the combinations of power and frequency ranges listed below:

FREQUENCY RANGE: 25 to 1000 mc in five ranges: (25-60mc) (50-125mc) (100-250mc) (200-500mc) (400-1000mc)

POWER RANGE: 10 to 500 Watts in six ranges: (10W) (25W) (50W) (100W) (250W) (500W)

ACCURACY: ±5% of full scale

VSWR: Below 1.05 for complete unit and two connectors.

QUICK - CHANGE CONNECTORS: Two TYPE "N" FEMALE connectors which mate with UG/21/8 are supplied **UNLESS OTHERWISE SPECIFIED.** Optional: (Male or Female "HN") (Male or Female "C") (Male "N") and (Female UHF: SO-239)

WEIGHT: 4 pounds

DIMENSIONS: 7" x 4" x 3"

Complete Specifications BULLETIN #436 Sent on Request.

OTHER BIRD PRODUCTS

"Termaline" RF Load Resistors

Coaxial RF Filters

Coaxial RF Switches



"Termaline" RF Absorption Wattmeters

BIRD ELECTRONIC CORP.
CHurchill 8-1200
30303 Aurora Road, Solon, Ohio
Western Representative:
VAN GROOS COMPANY, Woodland Hills, Calif.

MEETINGS AHEAD

Sept. 7-12: Machine Searching and Translation, International Conf., Western Reserve Univ. and Rand Devel. Corp., Western Reserve Univ., Cleveland.

Sept. 14-16: Quantum Electronics Phenomena, Office of Naval Research, Shawanga Lodge, Bloomingburg, N. Y.

Sept. 15-17: Electronic Exposition, Twin Cities Electronic Wholesalers Assoc., Municipal Auditorium, Minneapolis.

Sept. 17-18: Engineering Writing & Speech, Dual National Symposia, PGEWS of IRE, Sheraton-Plaza Hotel, Boston; Ambassador Hotel, Los Angeles.

Sept. 17-18: Nuclear Radiation Effects in Semiconductors, USASRDL, Western Union Auditorium, New York City.

Sept. 21-25: Instrument-Automation Conf. & Exhibit, ISA, International Amphitheater, Chicago.

Sept. 22-24: Industrial Nuclear Conf., Armour Research Foundation & NUCLEONICS (McGraw-Hill), Morrison Hotel, Chicago.

Sept. 23-25: Non-Linear Magnetics and Magnetic Amplifiers, AIEE, ISA, PGIE of IRE, Shoreham Hotel, Washington, D. C.

Sept. 23-25: Residual Gases in Electron Tubes and Related High-Vacuum Systems, International Symposium, Italian Society of Physics, Como, Italy.

Sept. 28-30: Telemetering, National Symposium, PGTRC of IRE, Civic Auditorium & Whitcomb Hotel, San Francisco.

Sept. 30-Oct. 1: Industrial Electronics Symposium, PGIE of IRE, AIEE, Mellon Inst., Pittsburgh, Pa.

Oct. 5-7: Communications Symposium, National Conf., PGCS of IRE, Hotel Utica, Utica, N. Y.

Oct. 12-14: National Electronics Conference, AIEE, EIA, IRE, SMPTE, Hotel Sherman, Chicago.

Mar. 21-24, 1960: Institute of Radio Engineers, National Convention, Coliseum & Waldorf-Astoria Hotel, New York City.

There's more news in ON the MARKET, PLANTS and PEOPLE, and other departments beginning on p 136.

your electronic wire and cable problems end here

Fast moving electronic technology so often demands wire and cable construction to meet specific performance needs. As a "specialist in specials" Chester's engineering and production facilities are geared to meet both military and commercial requirements for plastic insulated wire and cable, while offering standard constructions for more general applications. The few types shown on this page are typical, high-quality Chester products, all of which may be varied to solve your electronic wire and cable problems.

SEND FOR THIS FREE CATALOG

The full story of Chester wires and cables for the electronic industry is in condensed catalog ELT-1.

CHESTER CABLE CORP.
CHESTER, NEW YORK
A SUBSIDIARY OF MIAMI COPPER COMPANY

Distributed by GraybaR

COAXIAL CABLES

RG types in both standard and special designs; military or commercial versions. Meet all MIL specs. Miniature designs, too.

MILITARY HOOK-UP WIRES

A complete line for all military and commercial needs. Includes the new "Thrif-T-Bond"® bonded, tinned wire. Nylon, Teflon, braided jackets. Color-coded.

MULTI-CONDUCTOR CABLES

For computers and related equipment. Any number of color-coded conductors grouped to your requirements and sheathed.



MINIATURE WIRE & CABLE

Single or multi-conductor types in #18 to #30 AWG sizes with thin wall Plasticote® jacket. For radio, TV, electronic equipment.

AUDIO WIRES & CABLES

Microphone, phonograph, intercom, etc. An extensive selection of single and multi-conductor types for every audio application.

HI-V AND HI-F WIRES

High frequency test lead, high frequency lead wire and flame-retardant high voltage wire. For use on flyback transformers, accelerating anodes, etc.

APPARATUS WIRES

Wire sizes from #16 to #27 AWG, solid or stranded, Plasticote insulated. Range: —40°C to 90°C, 600 volts, AC.



TV TRANSMISSION LINES

Covering the broad field of TV, including lead-in wire, TV rotor cable, primary and secondary lead-in coaxial cables.

Courtesy Commander 337th Fighter Group, U. S. A. F.

Low Cost DAYLIGHT OSCILLOSCOPE

TYPE 317—It's excellent for the daylight conditions often encountered in the field and at production test stations. The brilliant trace, provided by 9-KV accelerating potential on a new Tektronix 3-inch cathode-ray tube, is easily readable in bright areas, even at low sweep-repetition rates. And its DC-to-10 MC vertical response easily takes care of most of today's complex field applications.

The Type 317 is an excellent laboratory oscilloscope, too. Ask your Tektronix Field Engineer or Representative to arrange a demonstration in your most demanding applications.

TYPE 317 CHARACTERISTICS

VERTICAL RESPONSE

Passband—dc to 10 mc.
Risetime—0.035 μsec.
Sensitivity—0.1 v/div to 125 v/div, dc-coupled and ac-coupled—0.01 v/div to 0.1 v/div, ac-coupled only. Twelve calibrated sensitivity steps.

SWEEP RANGE

0.2 μsec/div to 6 sec/div. 22 calibrated steps from 0.2 μsec/div to 2 sec/div.
5-x magnifier increases calibrated sweep rate to 0.04 μsec/div.

TRIGGERING

Preset or manual stability control with amplitude-level selection, and fully-automatic triggering.

ACCELERATING POTENTIAL

9-KV on new Tektronix high-voltage 3-inch cathode-ray tube.

CALIBRATOR

Amplitude calibrator, 0.05 to 100 v in 11 steps, square-wave frequency about 1 kc.

OTHER FEATURES

Electronic power-supply regulation.
External input to horizontal amplifier.
Warning lights for uncalibrated sweep-rate and sensitivity settings.
Magnifier indicator light.
Size—8½" wide, 12" high, 19½" deep.
Weight—35 lbs.

Type 317 . . . . . **$800** (50 to 60 cycle supply).
Type 317 MOD101 . . . . . **$835** (50 to 800 cycle supply).
RACK MOUNTING MODEL—Same electrical specifications as Type 317. Dimensions: 7" high, 19" wide, 17 9/16" rack depth.
Type RM17 . . . . . **$875**
f.o.b. factory

ENGINEERS—Interested in furthering the advancement of the oscilloscope? We have openings for men with creative ability in circuit and instrument design, cathode-ray tube design, and semiconductor research. Please write Richard Ropiequet, V.P., Eng.

Tektronix, Inc.

P. O. Box 831 • Portland 7, Oregon
Phone CYpress 2-2611 • TWX-PD 311 • Cable: TEKTRONIX

TEKTRONIX FIELD OFFICES: Albertson, L. I., N.Y. • Albuquerque • Atlanta, Ga. • Bronxville, N.Y. • Buffalo • Cleveland • Dallas • Dayton • Elmwood Park, Ill. • Endwell, N.Y. • Houston Lathrup Village, Mich. • East Los Angeles • West Los Angeles • Minneapolis • Mission, Kansas Newtonville, Mass. • Orlando, Fla. • Palo Alto, Calif. • Philadelphia • Phoenix • San Diego St. Petersburg, Fla. • Syracuse • Towson, Md. • Union, N.J. • Washington, D.C. • Willowdale, Ont.

TEKTRONIX ENGINEERING REPRESENTATIVES: Hawthorne Electronics, Portland, Oregon; Seattle, Wash.; Hytronic Measurements, Denver, Colo., Salt Lake City, Utah.

Tektronix is represented in 20 overseas countries by qualified engineering organizations.

Just flick your finger. That's all you do to select either of two circuit programs with AMP's new Program Selector Switch—up to 1500 poles, double throw. Compact in size, available in a fully shielded type, this new switch offers you all the reliability you need for any critical dry-circuit application.

The flick of your finger also pre-cleans all contacts for assured conductivity through AMP's patented wiping action. You get uniform pressure on all contacts . . . choice of tin or gold contact finish . . . exclusive contact and spring design plus many other features from AMP's industry-proved Patchcord Programming Systems . . . including A-MP Taper Pins, crimped to your leads and inserted into taper receptacles in the rear of the switch.

And—for flexibility, you can make a combination plug board and double throw switch with all throw positions independently patched.

THE BIG SWITCH!

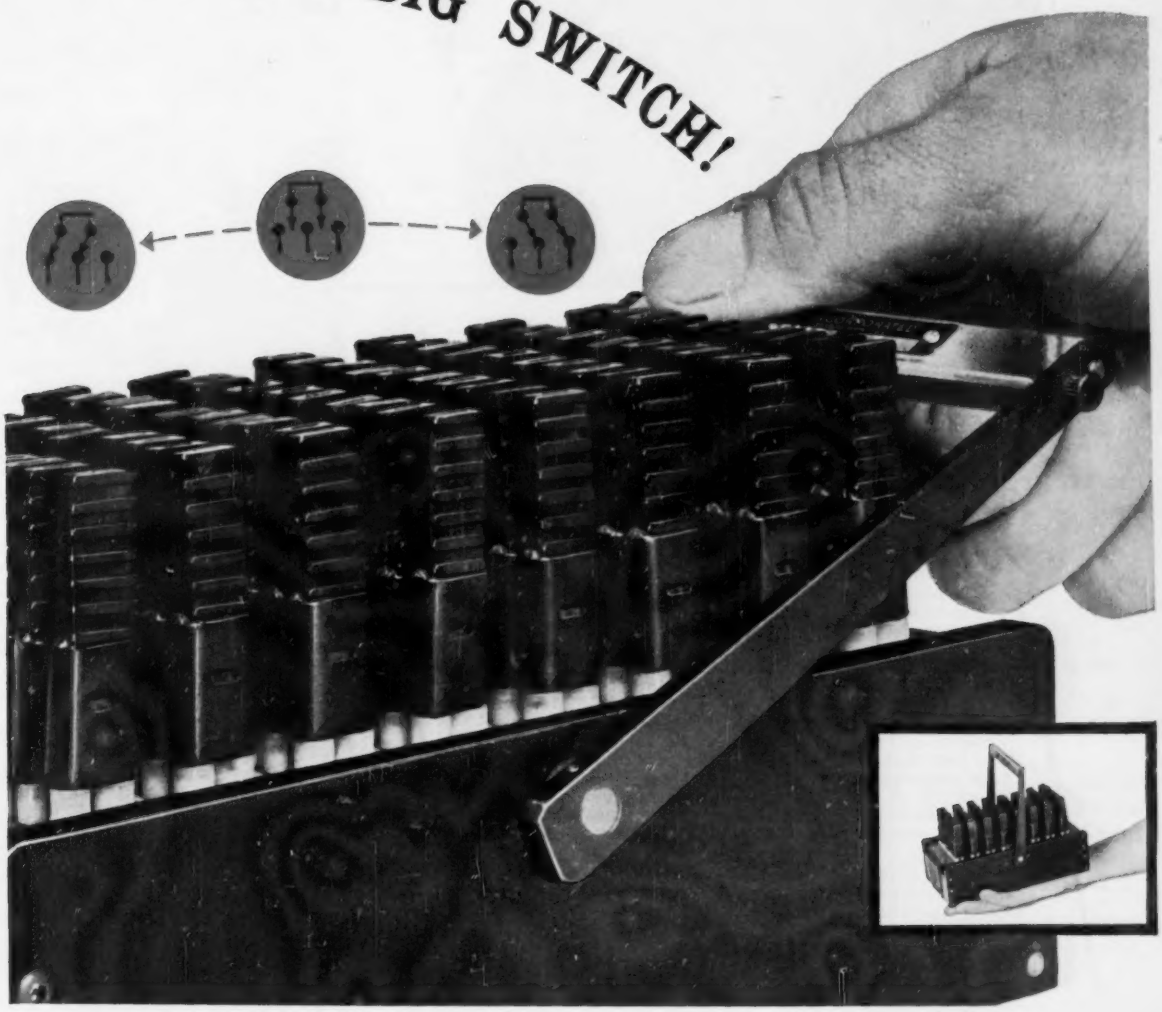

Make the big switch to the A-MP Double Throw Program Selector Switch. Send today for more information.

AMP INCORPORATED

GENERAL OFFICES: HARRISBURG, PENNSYLVANIA

A-MP products and engineering assistance are available through subsidiary companies in: Australia • Canada • England • France • Holland • Japan

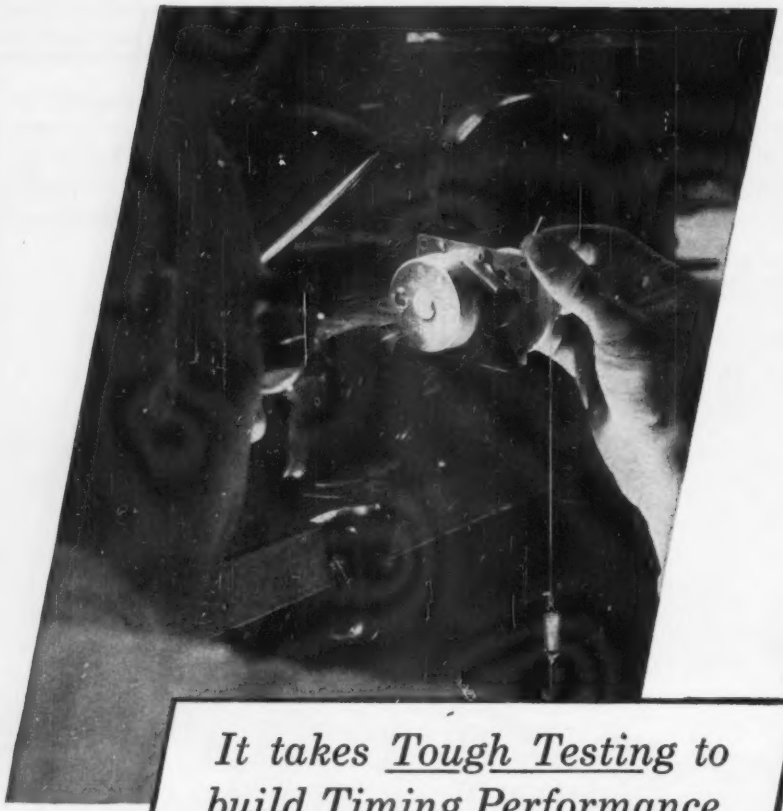

It takes Tough Testing to build Timing Performance

When you buy a Haydon Timing Motor or Timing Device, you buy high quality and superior performance, because every production model and every new design has *proved* itself by passing the toughest, most exhaustive series of tests that our engineers can devise.

Quality control at Haydon starts with a careful inspection of all in-coming materials. It continues throughout production — with all parts and assemblies gaged, inspected or physically tested after every operation that can affect the performance of the finished motor or device. Final step is an inspection of completed motors and timing devices. All units are performance tested for many hours under varying conditions and are checked for quiet operation. Percentage samples of each lot are checked for torque rating, timing accuracy, and accuracy and alignment of gears and shafts. In addition, all new designs and periodic samplings from production are subjected to special "life endurance" tests in which hundreds of units are run continuously under various load conditions. In some instances, units have now been running ceaselessly for more than 10 years . . . proving their ability to perform *millions of cycles without failure!*

When you submit your timing problems to Haydon, you can be certain that our teams of engineers and other Timing Specialists have the experience, knowledge and facilities to supply devices designed, produced *and* tested to meet your needs exactly and perform according to your specifications.

For further information, write now, outlining your timing requirements.

Haydon
AT TORRINGTON

DIVISION OF GENERAL TIME CORPORATION

2433 EAST ELM STREET
TORRINGTON, CONNECTICUT

Headquarters for Timing



TIME DELAY TIMER

Provides time delay in ranges up to 9.5 minutes. Ideal for such applications as the protection of power tubes and/or operating preset operating cycles. Available in 120 or 240 volt, 50 or 60 cycle current.



400 CYCLE MOTOR

These split phase motors provide the military an accurate approach to timing control for military applications. Rotor speed is 3,000 RPM at 400 cycles, 115 volt normal. Two models are available — Heavy Duty with 18 gram millimeters torque at the rotor, and the Miniature with 5 gram millimeters at the rotor. These motors may be applied to Haydon gear trains if desired.



CYCLE TIMER

These units repeat a set cycle or sequence of operations as long as the motor is energized. Available in a wide choice of speeds, a broad range of timing intervals, and with a wide range of enclosed single pole, double throw switches for 120 and 240 volt operation, for 50 and 60 cycles.

COORS PRODUCES CERAMIC TO MEET YOUR REQUIREMENTS!

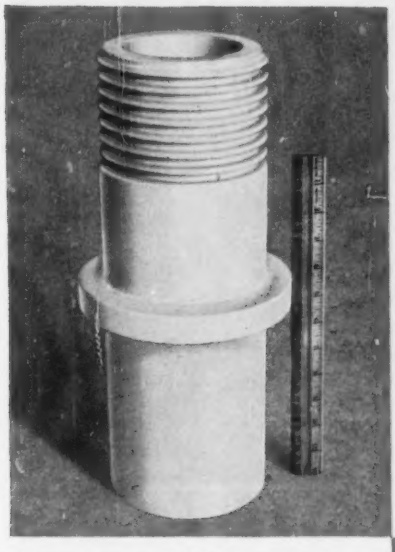

Eighteen years ago, this insulator was the answer to a need for a new ceramic for use on an early atomic project—Coors first production run of large ceramic parts using the isostatic technique.

New ceramic compositions, and new techniques have been introduced many times by Coors. Eighteen years ago Coors met the requirements of engineers in an early atomic project by supplying both a new ceramic composition and a new isostatic technique for forming ceramic components. The result—a new, mechanically strong, completely homogenous ceramic having excellent electrical properties.

Demands for better, stronger materials have been answered by Coors throughout the 47 years of their experience. Continuous research assures future developments. For example, Coors AD-99 is only one of several ceramic materials recently developed to meet the new needs of the electronic industry.

Parallel with the development of new ceramic compositions is the research for new and better techniques. For example, a completely new department for metalizing and brazing was installed and recently enlarged. Ceramic-to-metal assemblies can be furnished where brazing temperatures go as high as 1083° C —bonds have tensile strengths as high as 9,000 to 12,000 psi.

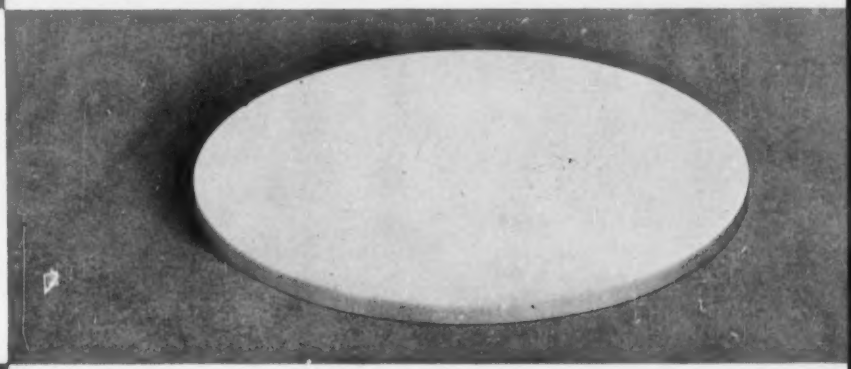

Coors precision finishing improves accuracy of electrical characteristics—this window for a traveling wave tube has thickness tolerances of ±.0005", and a flatness of 2 to 3 light bands.

Brazing temperatures of 1083° C were used in making this hermetic ceramic-to-metal assembly, permitting high operating temperatures in the final use of this design.

Ceramic compositions or production techniques are of little value without precise control. You need close tolerances—you obtain them from Coors in production runs, or experimental prototypes. Customary, careful work by over 600 skilled workers permits holding tolerances of 30 millionths of an inch on production runs.

To meet increased demands, additional engineers are being assigned to the field—Coors engineers in your neighborhood give you on-the-spot ceramic design service. They need only your invitation to help you with your ceramic problems.

For information concerning our facilities and for data about Coors high alumina ceramics, please write for bulletin 858.

Coors

COORS PORCELAIN COMPANY

600 Ninth Street, Golden, Colorado

CIRCLE NO. 67 READER SERVICE CARD

COMBAT MOBILITY

telecommunications move up-front with the advance

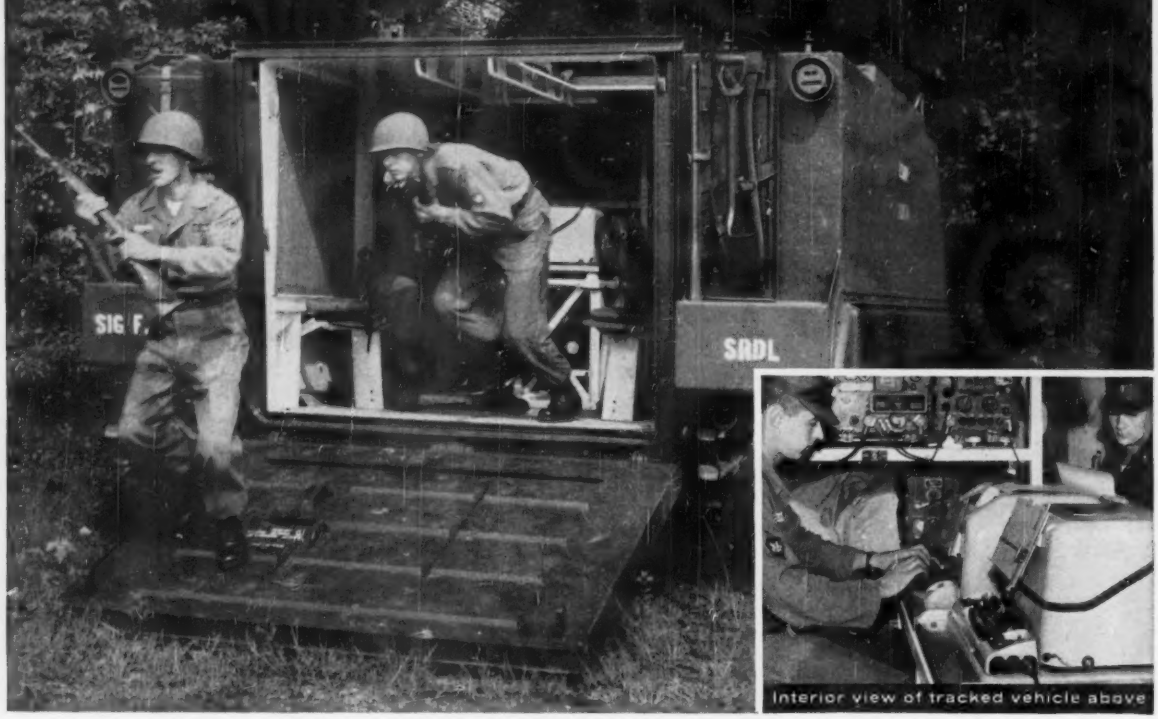

Interior view of tracked vehicle above

Kleinschmidt teletypewriters maintain constant contact, in print, between U. S. Army command and field positions

On the go...bouncing over bunker or beachhead ...Kleinschmidt teletypewriters accurately, efficiently send and receive printed messages. Developed in cooperation with the U. S. Army Signal Corps, these units instantly provide both sender and receiver with identical data...*printed on paper!* In recognition of its quality, Kleinschmidt equipment is manufactured for the U. S. Army under the Reduced Inspection Quality Assurance Plan. This kind of proved experience is now available for unlimited advances in electronic communications for business and industry.

KLEINSCHMIDT

DIVISION OF SMITH-CORONA MARCHANT INC., DEERFIELD, ILLINOIS

Pioneer in teleprinted communications systems and equipment since 1911

CIRCLE NO. 68 READER SERVICE CARD

CIRCLE NO. 69 READER SERVICE CARD→

CLARE relays and stepping switches

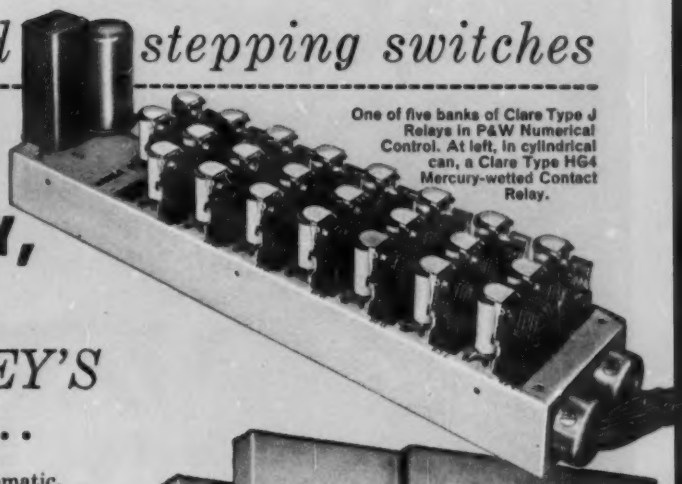

One of five banks of Clare Type J Relays in P&W Numerical Control. At left, in cylindrical can, a Clare Type HG4 Mercury-wetted Contact Relay.

INSURE ACCURACY, INCREASE RELIABILITY, REDUCE SIZE *of*

PRATT & WHITNEY'S Numerical Control...

Pratt & Whitney's Numerical Control is a fully automatic, ultra-precise means of translating blueprint data into a series of machine positions. Applied to jig borers and other precision Pratt & Whitney machine tools, settings are made quickly, with high reliability to .0001" accuracy.

In operation, the Planning Engineer transfers to a Numerical Planning Chart all dimensional data from the blueprints which are necessary to determine the positions. Ordinary clerical help then punch these data into a tape. Machine positionings are then controlled by the tape or, when required, by a dial on the Operator's Console.

Here is what P&W's Mark H. Sluis has to say about the vital part played by Clare Relays and Stepping Switches:

"In the 4EA Numerically Controlled Jig Borer, punched-tape information is decoded by Clare Type J Relays and fed to a storage bank of 25 Clare Type 11 Stepping Switches. The selection of the proper storage switch is accomplished by a distributor—a Clare Type 26 Stepping Switch. In addition to storing the required command data for the slide positioning of this machine, logic circuitry comprises some 115 Clare Type J Relays.

"For ultra-reliability of the digit-selection circuitry, a dozen Clare Type HG4 four-pole Mercury-wetted Contact Relays are utilized.

"Through use of the Clare relays and stepping switches, our circuitry has increased in reliability, and a large contribution was made which enabled us to realize a 6:1 size reduction of the control system."

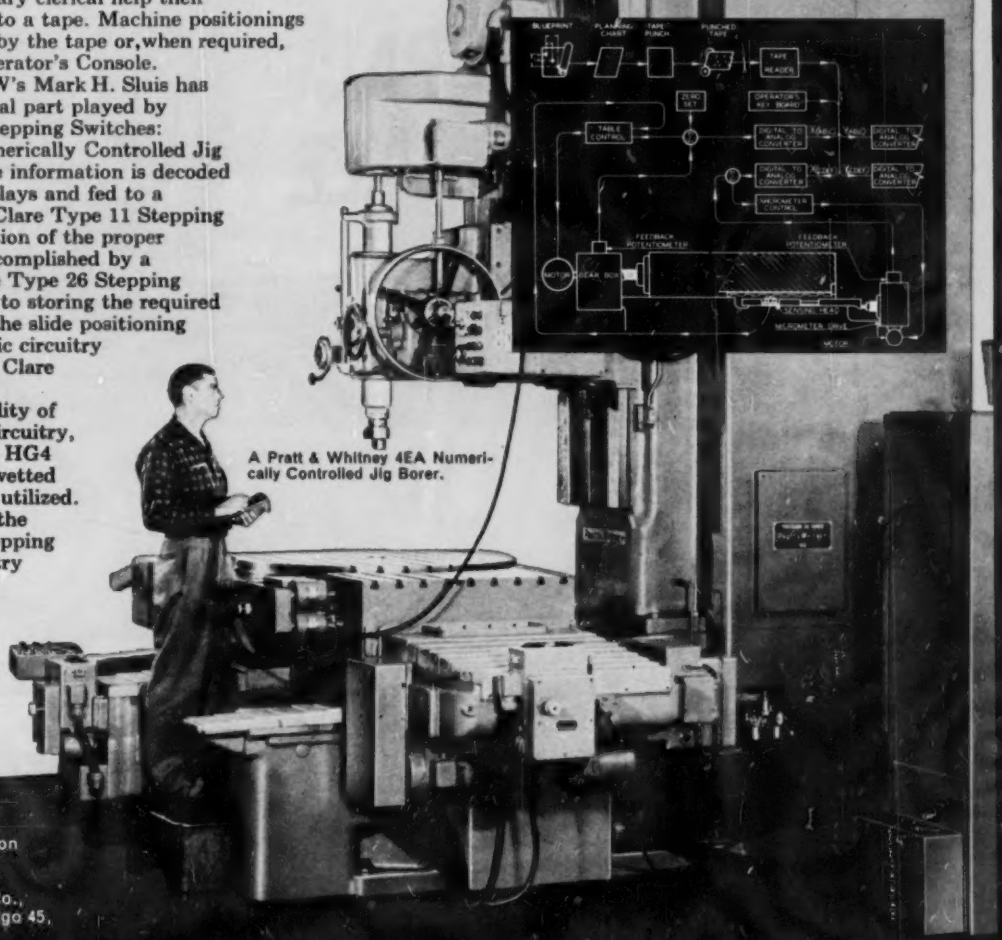

A Pratt & Whitney 4EA Numerically Controlled Jig Borer.

For complete information on Clare Relays and Stepping Switches contact C. P. Clare & Co., 3101 Pratt Blvd., Chicago 45, Illinois. In Canada: C. P. Clare Canada Ltd., P.O. Box 134, Downsview, Ontario. Cable Address: CLARELAY

CLARE RELAYS *First in the Industrial Field*

B.F.Goodrich

. . . and B.F.Goodrich is selling it . . . in the form of microwave absorbent. If you're in the business of space, this is the testing material for you. As you know, the specifications and details are complicated. So why not ask for *all* the information? Write for free booklet to The B.F.Goodrich Company, 586 Derby Place, Shelton, Connecticut.

B.F.Goodrich ***microwave absorbents***

the extraordinary molded carbon potentiometer...

CLAROSTAT SERIES 53

Used and proved superior in tens of thousands of installations, the Clarostat Series 53 molded carbon potentiometer is now available in quantity schedules to meet any production requirement.

The extraordinary performance and reliability of the Series 53 result from a Clarostat-conceived design that eliminates all metal-to-metal movable contacts, reducing noise, wear, and backlash.

For any application requiring the inherent superiorities of the molded carbon potentiometer, check the extraordinary features of the Clarostat Series 53 before settling for the ordinary . . .

- Pre-molded and pre-selected resistance element.
- One-piece carbon contact with simultaneous contact on resistance element and collector terminal.
- Zero backlash. Maximum stability.
- Gold-plated terminals for easiest soldering.
- Grease seal around shaft.
- Terminals molded in element and control base.
- Full 2-watt rating at 70°C.
- Available in completely encapsulated units for maximum environmental protection.

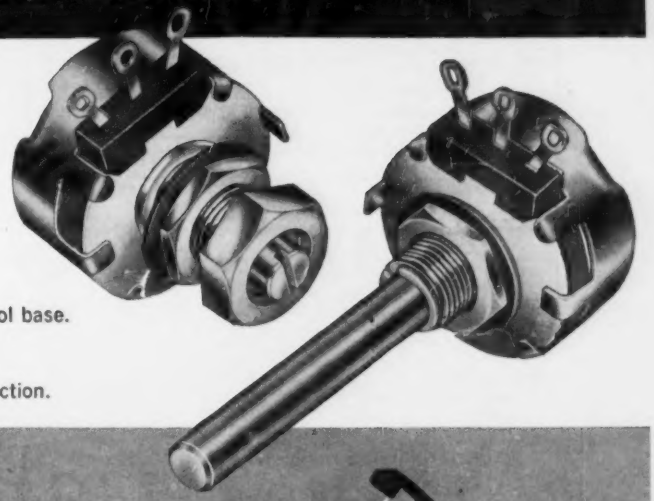

SPECIFICATIONS

POWER RATING: 2-watts at 70°C
RESISTANCE RANGE: Linear—50 to 10 meg. Tapered—250 to 5 meg. (Right or left-hand)
INSULATION BREAKDOWN: Between terminals and ground for 1 minute, 1000 v.d.c.
SWITCHES: SPST, SPDT, DPST
TORQUE: 1 to 6 oz. in. Up to 20 oz. in. with jam nut bushing.
EFFECTIVE ROTATION: 312° ± 3°
CONSTRUCTION: Meeting requirements of MIL-R-94 where applicable.

CLAROSTAT

CLAROSTAT MFG. CO., INC.
DOVER, NEW HAMPSHIRE
In Canada:
CANADIAN MARCONI CO., LTD., TORONTO 17, ONT.

direct line service

IMMEDIATE DELIVERY!

Phone your local Clarostat Industrial Distributor for popular, standard Series 53 or military style RV-4 units...for fast delivery from local stock.

Need Tantalum Capacitors?

Choose From 15 Mallory Broadest Line on the

Type	Description	Capacity Range	W. Volts DC Rating at 85°C	Temperature Range	Case Style	Body Length	Body Diameter
HAT	Pellet Anode—Liquid Electrolyte	1-10 mfd.	16-1V.	—20 to +85°C	Metal Case—Axial Leads—Insulated Case	.210" max.	.075" max.
TAS	Pellet Anode—Solid Electrolyte	.33-330 mfd.	35-6V.	—80 to +85°C	Metal Case—Axial Leads	.250" to .750"	.125" to .341"
TAM	Pellet Anode—Solid Electrolyte	6.8-56 mfd.	25-6V.	—55 to +85°C	Dip Coated Resin—Upright Mounting	.175" thick	.313" square
TAF	Foil Anode—Semi-Liquid Electrolyte	.25-440 mfd.	150-3V.	—55 to +85°C	Metal Case—Axial Leads	.688" to 2.750"	.188" to .375"
STNT	Pellet Anode—Liquid Electrolyte	2-40 mfd.	50-3V.	—55 to +85°C	Metal Case—Axial Leads	.350"	.155"
TNT	Pellet Anode—Liquid Electrolyte	4-80 mfd.	50-3V.	—55 to +85°C	Metal Case—Axial Leads	.500"	.155"
TAP	Pellet Anode—Liquid Electrolyte	2-30 mfd.	90-6V.	—55 to +85°C	Metal Case—Axial Leads	.500"	.238"
TAP2	Pellet Anode—Liquid Electrolyte	11-140 mfd.	90-6V.	—55 to +85°C	Metal Case—Axial Leads	.660"	.238"
M2	Pellet Anode—Liquid Electrolyte	11-140 mfd.	90-6V.	—55 to +150°C	Metal Case—Axial Leads	.500"	.290" (Body) .484" (Flange)
XTK	Pellet Anode—Liquid Electrolyte	2-70 mfd.	340-8V.	—55 to +175°C	Metal Case—Axial Leads or Terminal	.438" to 1.313"	.650"
XTM	Pellet Anode—Liquid Electrolyte	4-140 mfd.	340-8V.	—55 to +175°C	Metal Case—Axial Leads or Terminal	.563" to 1.781"	.650"
XTL	Pellet Anode—Liquid Electrolyte	3.5-120 mfd.	630-18V.	—55 to +200°C	Metal Case—Axial Terminal	.500" to 2.595"	.875"
XTH	Pellet Anode—Liquid Electrolyte	7-240 mfd.	630-18V.	—55 to +200°C	Metal Case—Axial Terminal	.688" to 4.063	.875"
XTV	Pellet Anode—Liquid Electrolyte	18-1300 mfd.	630-30V.	—55 to +175°C	Metal Case—Axial Terminal	.563" to 2.750"	1.125"
XTO	Pellet Anode—Liquid Electrolyte	7-240 mfd.	630-18V.	—55 to +200°C	Metal Case—Axial Terminal	.563" to 2.750"	1.125"

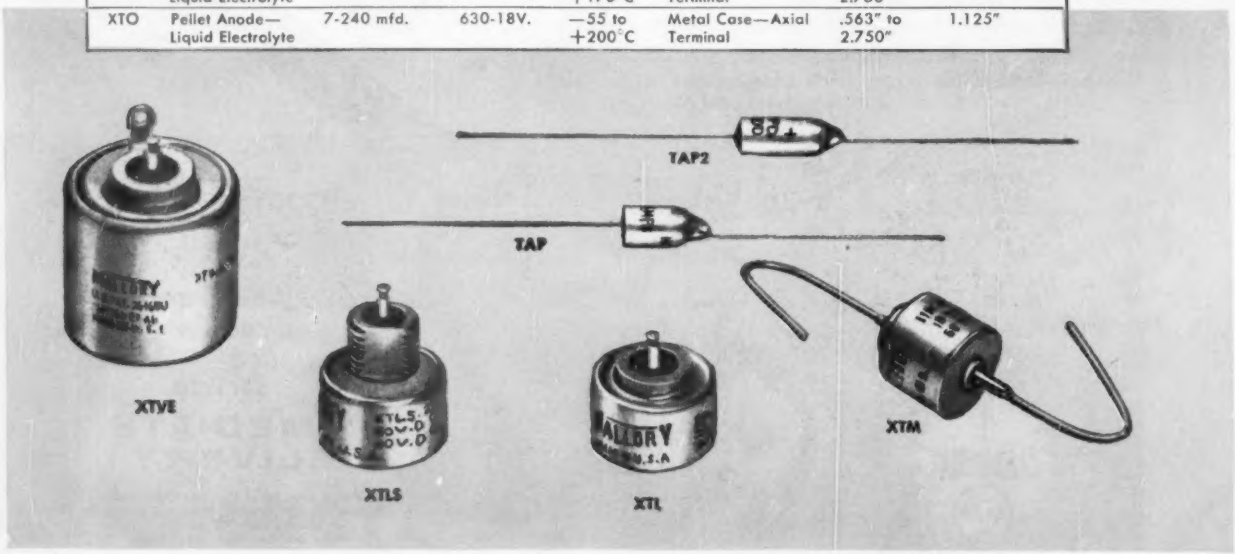

Types... Market

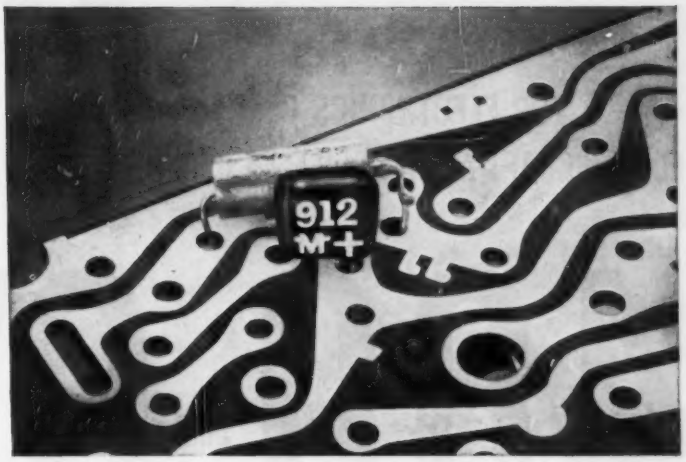

Whenever you need tantalum capacitors for high reliability service in military or commercial electronics, you're sure to find the type you need and the performance you're looking for in the Mallory line.

Leader in tantalum capacitor technology, Mallory has developed models ranging from the miniature Type HAT, scarcely larger than the head of a match, to the high-capacitance Type XTV, which can replace several conventional capacitors.

200°C ratings, pioneered by Mallory and available only from Mallory, can be obtained in several different capacitor designs.

In most of the types shown here, the unique sintered pellet anode construction gives life, stability and electrical properties that are unequaled in the industry. Refinements in hermetic sealing and in design for extreme shock and vibration further expand the utility of the line. Latest additions include a series of new space-saving encapsulated capacitors, and a line of tantalum foil units for applications requiring the special characteristics available from this construction.

New Encapsulated Tantalum Capacitor Saves Space, Weight, Cost.

Another Mallory first . . . the new type TAM tantalum capacitor . . . is the first solid electrolyte tantalum capacitor without a metal case. Ideal for printed circuits. Takes only ⅛ the space of its metal counterpart, weighs 30% less; cost is substantially lower. Fully insulated. Grid-spaced leads dimensioned to EIA printed circuit standards. Protected against moisture by a specially developed encapsulation material. Size: 5/16" square, .175" thick. Ratings from 56 mfd., 6VDC to 15 mfd., 25VDC.

All models listed here are available for immediate delivery. Write today for technical data, and for experienced consultation on your circuit requirements by a Mallory capacitor specialist.

Mallory Capacitor Company
Indianapolis 6, Indiana
a division of
P.R MALLORY & CO Inc.

MALLORY

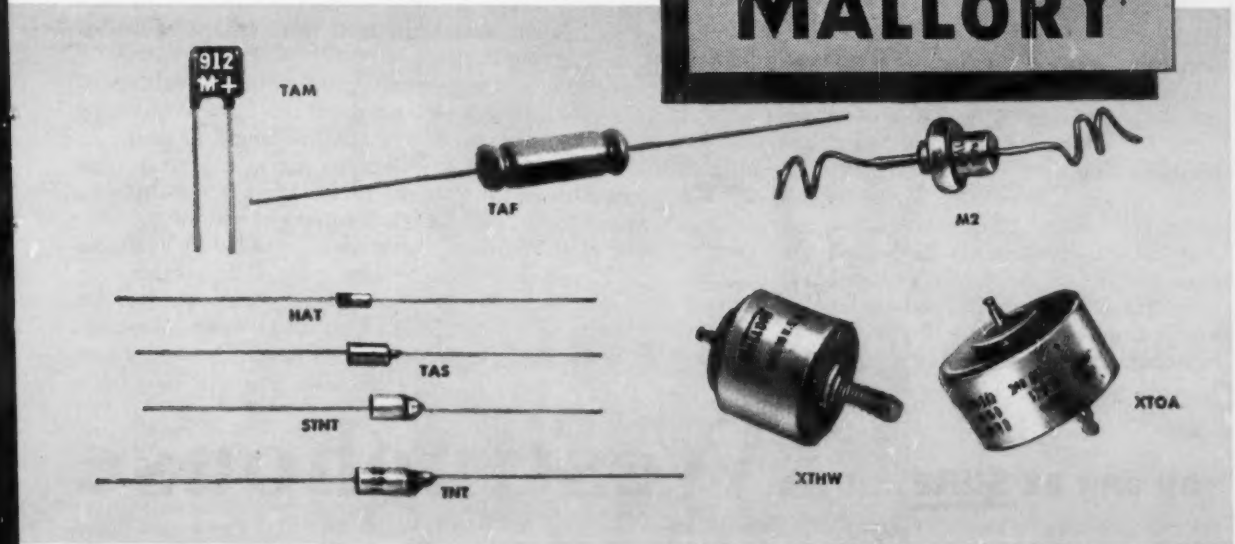

FOR ELECTRONICS PLANTS...
FOR AIRCRAFT AND MISSILE BASES...

NEW 400-CYCLE BUS DUCT

WITH ONLY 1.28 VOLTAGE DROP PER 100 FT!

High-frequency power distribution runs are, for the first time, really practical and economical. Now, a single, central high-frequency generator can completely power tens of thousands of square feet.

At 400 cycles and up, new Westinghouse high-frequency bus duct will deliver power with a maximum voltage drop of only 1.28 volts each 100 feet under full load of 800 amps. Here is performance that cannot economically be begged, borrowed or coaxed out of cable-conduit or other bus duct. Compare this efficiency with conventional systems in which drops of from 7 to 15 volts can normally be expected. Housing of duct is nonmagnetic aluminum . . . shields test equipment from radio frequencies originating in duct.

Here is an opportunity, too, to take advantage of all the inherent advantages of bus duct. Power taps every 60 inches over the entire length of duct . . . no splicing. No complex wire mazes. Infinitely more flexible and convenient to use. Duct is more quickly and easily installed than cable and conduit.

High-frequency bus duct is immediately available . . . and only from Westinghouse. Get in touch with your local Westinghouse sales representative. Or write or wire Standard Control Division, Westinghouse Electric Corporation, Beaver, Pa. J-30285

YOU CAN BE SURE...IF IT'S **Westinghouse**

WATCH "WESTINGHOUSE LUCILLE BALL-DESI ARNAZ SHOWS" CBS TV FRIDAYS

CIRCLE NO. 75 READER SERVICE CARD→

Trimpot® Trio

MODEL 236 MODEL 260 MODEL 200



MODEL 236 HUMIDITY-PROOF TRIMPOT
Completely sealed to meet Mil Specs for humidity, sand, dust and salt spray, this proved wirewound potentiometer dissipates 0.8 watt at 70°C., operates reliably at temperatures up to 135°C. Resistances from 10Ω to 100K. Choice of terminals and mounting types.

MODEL 260 HIGH-TEMP, HIGH-POWER TRIMPOT
A favorite Mil Spec wirewound unit for hot spots. Use it where you need dependable, continuous operation from —65°C. to +175°C. Dissipates 1.0 watt at 70°C. Resistances from 10Ω to 100K. Choice of terminals and mounting types.

MODEL 200 GENERAL-PURPOSE TRIMPOT
Up-to-the-minute version of the original wirewound Trimpot—used in more military and commercial programs than any other leadscrew-actuated potentiometer. Maximum operating temperature is 105°C. Dissipates 0.25 watt at 70°C. Resistances from 10Ω to 100K. Choice of terminals and mounting types.

The reliability of this well-known Trimpot trio has been proved repeatedly in America's toughest military programs. The Trimpot design has become the standard of the industry since Bourns introduced the leadscrew-actuated potentiometer seven years ago. Screwdriver settings are pinpoint sharp and virtually unaffected by vibration, acceleration and shock. Small size and space-saving shape permit installation of 12 units in one square inch.

For your wirewound or carbon potentiometer applications, Bourns offers you an inventory of 500,000 units—stocked by the factory and franchised electronic distributors across the nation. Besides the Trimpot Trio, there are 20 other basic models—each available in a variety of terminal and mounting types. *Terminals:* insulated stranded leads, solder lugs, printed circuit pins and bare wires. *Mounting types:* Panel, chassis and printed circuit. Write for new summary brochure no. 4.

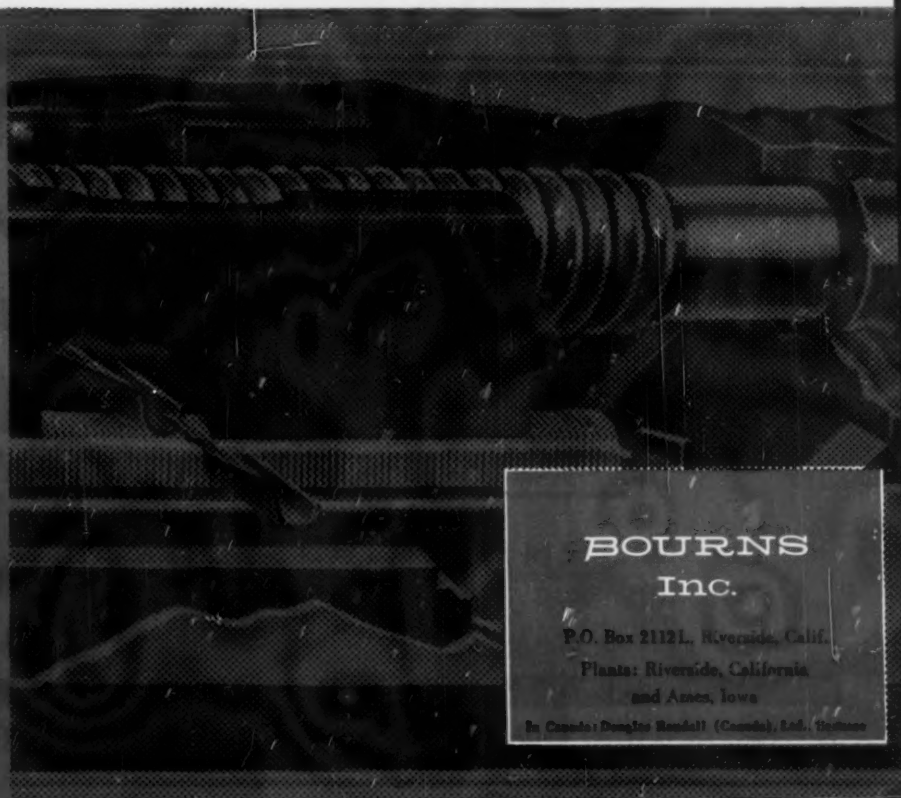

BOURNS
Inc.
P.O. Box 2112L, Riverside, Calif.
Plants: Riverside, California and Ames, Iowa
In Canada: Douglas Randall (Canada), Ltd., Toronto

140 KMC

ULTRAMICROWAVE* EQUIPMENT BY

–it works–it's accurate–it's available



These millimeter wave units can greatly enlarge your scope of microwave activity. Research previously considered impractical at 140 KMC can now be carried on successfully.

De Mornay-Bonardi manufactures cavity wavemeters, crystal multipliers, crystal mounts, E-H tuners, and standing wave detectors specifically for use at 140 KMC. They work—we've been using these units effectively in our own laboratories for developing other items. These instruments are accurate—functionally as accurate as De Mornay-Bonardi equipment used at 90 KMC. You can order these units now—we're currently filling orders on 140 KMC instruments.

Write for complete data

CRYSTAL MULTIPLIERS


STANDING WAVE DETECTORS


CRYSTAL MOUNTS

E-H TUNERS


CAVITY WAVEMETERS

DE MORNAY-BONARDI®

DE MORNAY-BONARDI

780 SOUTH ARROYO PARKWAY • PASADENA, CALIF.

*TRADE MARK DE MORNAY-BONARDI

Low Cost Transistorized DC Power Supply (width: 8", height: 4½", depth: 14")

NJE answers the engineers' quest for a low cost transistorized power supply that is fully capable of remote sensing and remote programming—a power supply impervious to overloads or short circuits.

These compact, flexible NJE power supplies are designed in a new "half rack" modular concept suitable for laboratory bench use or in rack installations* as a component part of your equipment. They are also capable of series or parallel operation.

Component derating and construction conform to the highest commercial practices.

Check these specs!	MODEL TR-18-2	MODEL TR-36-1
Voltage Range	0-18 VDC	0-36 VDC
Current Range	0-2 amps	0-1 amp
Load Regulation (0-100%)	±0.05% or ±2 mv	±0.05% or ±2 mv
Line Regulation (±10%)	±0.1% or ±3 mv	±0.1% or ±3 mv
RMS Ripple	1 millivolt	1 millivolt
Internal Impedance (DC-20KC)	0.1 ohm max.	0.2 ohm max.

WRITE TODAY FOR COMPLETE TECHNICAL DATA

Models in stock subject to prior sale • **$250** each net; quantity discounts available •*Suitable front panels for rack mountings are available on order (single supply panel, Model RP1 $15 each net; dual supply panel, Model RP2 $15 each net)

NJE CORPORATION

20 Boright Avenue · Kenilworth, New Jersey

BR. 2-6000 • TWX Cranford, NJ 51 • FAX-FFP

Pioneering Achievements in Electronics at JPL

GUIDANCE RESEARCH . . . by JPL has led and advanced the field of missile guidance. Among these achievements are the application of Wiener RMS methods to multiple-input, multiple-loop servos, and matching missile trajectory to missile control transfer function for optimum accuracy.

GUIDANCE SYSTEMS . . . both inertial and radio-command types employing new concepts of radar communication have been pioneered at JPL. This guidance system development activity is supported by basic research in all phases of electronics.

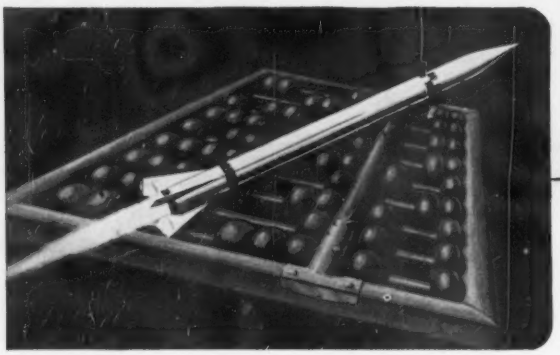

COMPUTERS . . . and the application of computing techniques to missile guidance systems have been pioneered by JPL. The Laboratory is now searching for new techniques that will further advance the state of the art in digital guidance components and computer systems.

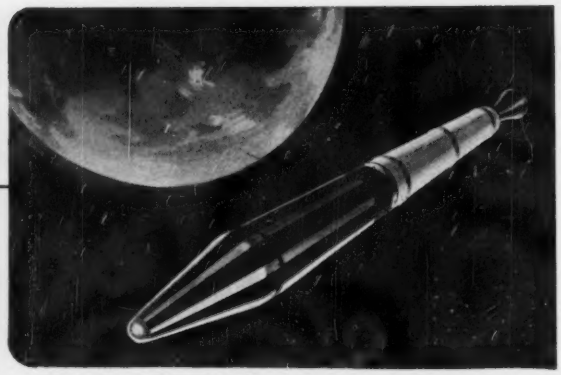

DATA TRANSMISSION . . . brings news from space via the Explorer series. Explorer III used a tape recorder the size of a cigarette pack capable of transmitting two hours of information in 5 seconds. Electronic payload weight was approximately 11 lbs.

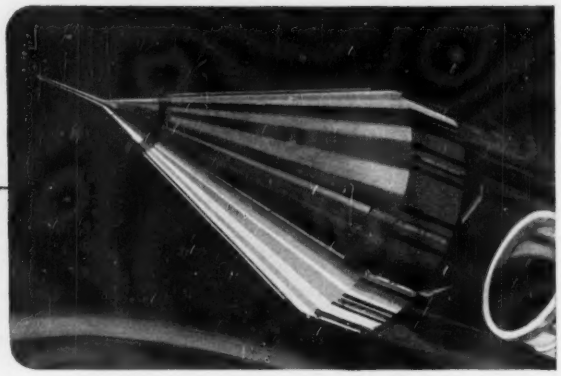

INSTRUMENTATION . . . of the moon probe provided measurement of radiation environment at distances far from the earth. Telemetered data revealed the existence of high intensity radiation. Miniaturization resulted in an instrument payload weighing only 10 lbs.

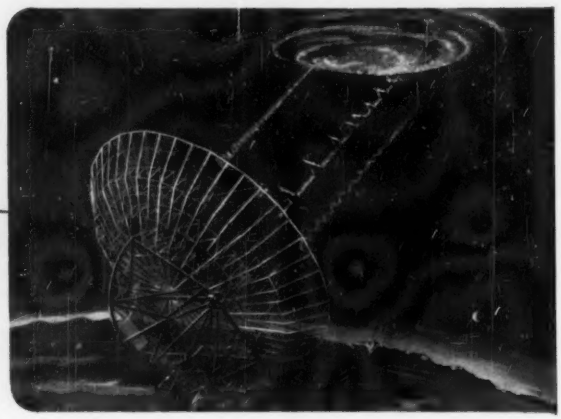

COMMUNICATIONS . . . pioneering in interplanetary communications resulted in this giant parabolic radio antenna, 85 feet in diameter, developed by the Laboratory which enables the tracking and reception of scientific data from great distances.

jpl

CALIFORNIA INSTITUTE OF TECHNOLOGY

JET PROPULSION LABORATORY

A Research Facility operated for the National Aeronautics and Space Administration

PASADENA, CALIFORNIA

Employment opportunities for Engineers and Scientists interested in basic and applied research in these fields:

INFRA-RED, OPTICS, MICROWAVE, SERVOMECHANISMS, COMPUTERS, LIQUID AND SOLID PROPULSION, STRUCTURES, CHEMISTRY, INSTRUMENTATION, MATHEMATICS, AND SOLID STATE PHYSICS

Send professional resume, with full qualifications and experience, for our immediate consideration

NEW

CARRIER AND LOW LEVEL PREAMPS OFFER MORE RECORDING USEFULNESS

–per inch
–per dollar
–per channel

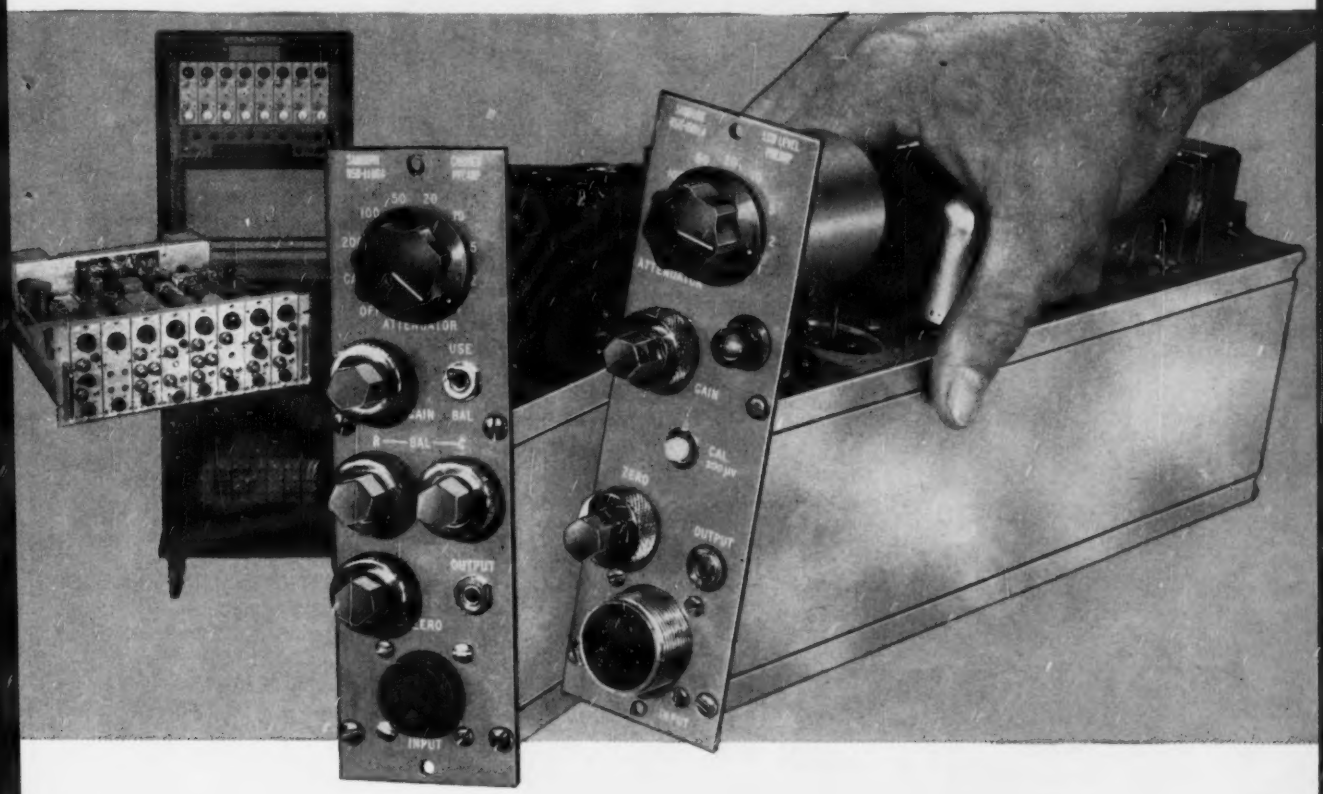

WITH the availability of these two new plug-in preamplifiers and associated MOPA, Sanborn 6- and 8-channel "850" oscillographic recording systems can now record an even *wider* variety of inputs — wherever *many channels* are needed in *minimum panel space*, with *no* sacrifice in system accuracy or reliability. The 850-1100A is a carrier amplifier-demodulator unit designed to work with resistance bridge, variable reluctance and differential transformer transducers. Attenuator, smooth gain, position and balancing controls are on the 2" x 7" front panel; input and output connections are provided at both front and rear. The 850-1500A is a chopper amplifier with floating input isolated from a floating output, capable of measuring low level DC-100 cps signals such as those from thermocouples and strain gage bridges. Design provides low noise operation, greater freedom from ground loop interference and high common mode rejection ratio. Required carrier excitation (2400 cps standard, 600, 1200 and 4800 cps optional) and chopper drive (440 cps) voltages are supplied by the 850-1900 MOPA, a dual-oscillator unit which can handle up to eight of each preamplifier.

SPECIFICATIONS

	850–1100A	850–1500A
Sensitivity	100 μv in gives 1 v at output	
Input impedance	approx. 2500 ohms	approx. 100,000 ohms
Output	±2.5v across 3300 ohms	±2.5 volts across 2500 ohms
Freq. response	–3 db at 20% of carrier freq.	0–100 cps, –3db
Linearity	±0.5% of full scale	±0.1% of full scale
Common mode performance		120 db for 60 cps, 160 db for DC with 5000 ohms unbalance in input
Noise		2 μv p-p over 100 cps bandwidth

(data subject to change without notice)

Ask your Sanborn Sales-Engineering representative for complete facts on all "850" system units — or write the main office in Waltham.

SANBORN COMPANY
Industrial Division
175 Wyman St., Waltham 54, Mass.

Proceed- OPERATION EXPANSION

September 1, 1959 — Raytheon Government Equipment Division today announced a major expansion into five operating subdivisions: Submarine Signal, Airborne Electronic, Systems Management, Heavy Electronic, and Santa Barbara.

Made necessary by expanding product activity, the decentralization has created managerial and technical staff positions in all areas.

Engineers and scientists of established technical competence are invited to investigate the several opportunities present in the area encompassing their particular interest.

Inquiries should be forwarded to Mr. Donald Sweet, Engineering and Executive Placement, Government Equipment Division, Raytheon Company, 624F Worcester Road, Framingham, Mass.

H. R. OLDFIELD, JR.
Vice President & General Manager
Government Equipment Division

GOVERNMENT EQUIPMENT DIVISION

RAYTHEON

EXCELLENCE IN ELECTRONICS

SUBMARINE SIGNAL | AIRBORNE ELECTRONIC | SYSTEMS MANAGEMENT | HEAVY ELECTRONIC | SANTA BARBARA

SUBMARINE SIGNAL

Newport, Rhode Island
W. Rogers Hamel,
General Manager

Engineering, Marketing, and Production of comprehensive anti-submarine warfare systems. Major products: underwater detection, navigation, communications and fire control equipment.

AIRBORNE ELECTRONIC EQUIPMENT

Maynard, Sudbury, Waltham, Massachusetts
Glenn R. Lord,
General Manager

Engineering, Marketing, and Production of advanced aerospace systems. Major products: navigation, search, and fire control apparatus for manned aircraft, unmanned aircraft, and space vehicles.

SYSTEMS MANAGEMENT

West Newton, Massachusetts
Harold M. Hart,
General Manager

Engineering, Marketing, and Management of major electronic system programs. Activities include systems synthesis, learning machines, weapons studies, microwave supported platform.

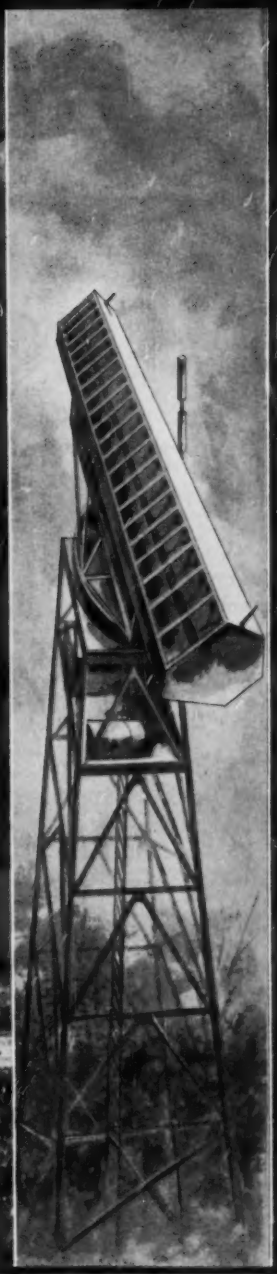

HEAVY ELECTRONIC EQUIPMENT

Wayland, North Dighton, Massachusetts
Fritz A. Gross,
General Manager

Engineering, Marketing, and Production of long range surface radars, ordnance and communications sytems. Products encompass 800-ton ground warning systems, missile fire control radars, 96-voice channel pulse code modulation equipment.

SANTA BARBARA

Santa Barbara, California
Gordon S. Humphrey,
General Manager

Engineering, Marketing and Production of infrared and countermeasures devices. Projects involve active and passive ECM equipment for aircraft, missiles, and satellites, infrared guidance, mapping, and fire control components.

Why you can always depend on Asarco high purity elements

1. ASARCO examines every lot of material by chemical, spectrographic, and other instrumental techniques and reports all detectable impurities. This assures you of a uniform quality of material from a dependable source of supply.

2. ASARCO supplies for you with each purchase an actual analysis of impurity elements detectable and the probable level at which these impurities are present.

3. ASARCO has been a pioneer in the production of high purity elements for over 25 years. ASARCO high purity elements have been used for research in this country and abroad for fundamental studies in metal-physics and semi-conductor technology. The High Purity Metals Staff is always available to discuss your individual problems.

ASARCO

The above information is among the pertinent data compiled by ASARCO's Central Research Laboratories in a catalogue, now available to users of high purity elements. For copy, write on your letterhead to American Smelting and Refining Company, 120 Broadway, New York 5, N. Y.

(If you use high purity elements, save this page as a current buying guide)

ASARCO HIGH PURITY ELEMENTS... ANALYSIS as of August 1, 1959

Impurities, sometimes found, at maximum levels, ppm (*less than ppm indicated)

ASARCO High Purity Element	Bi	Cu	Fe	As	Sb	Pb	Ag	Tl	Sn	Te	Au	Na	Cl	Cd
ANTIMONY	1	2	1	15										
ARSENIC		1*	1*											
ARSENIC TRIOXIDE		1*			1*									
BISMUTH		2	1			1	2						1*	
CADMIUM		1*				20								
COPPER														
INDIUM		1*				1		1*	1					
LEAD	1*	1*	1*				1*							
SELENIUM		1*		1*						1			1*	
SILVER		1*	1*			1*					1			
SULFUR												1	1	
TELLURIUM		1*	1*											
THALLIUM	1	3	1			1			1			2	1*	
ZINC		1*	1*			1*								1*

HEAT PROBLEMS?

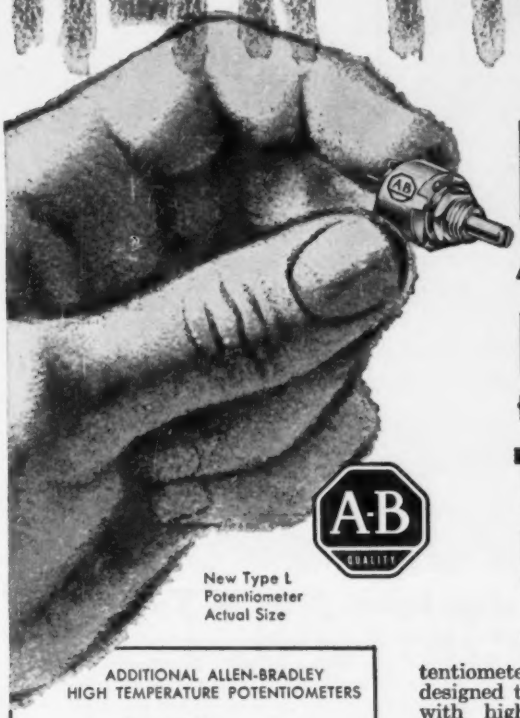

New Type L Potentiometer Actual Size

NEW

Allen-Bradley

POTENTIOMETERS

for use in

TEMPERATURES UP TO 150°C!

ADDITIONAL ALLEN-BRADLEY HIGH TEMPERATURE POTENTIOMETERS

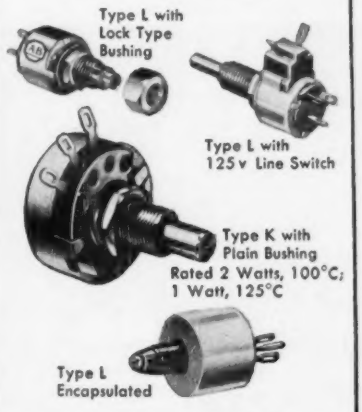
Type L with Lock Type Bushing
Type L with 125 v Line Switch
Type K with Plain Bushing
Rated 2 Watts, 100°C; 1 Watt, 125°C
Type L Encapsulated

This new Allen-Bradley potentiometer—the Type L—is especially designed to solve problems associated with high ambient temperatures—*and* space conservation. Although extremely compact—0.5 inch in diameter—the Type L control has a conservative rating of 0.5 watt when operating in an ambient temperature of 100°C. And, it provides reliable performance when operated at a temperature of 150°C—under "no load" conditions. (See graph at right.)

The new Type L control features the same solid, *hot molded* resistance element that has proved unequaled for long life, smooth operation, and low "noise" characteristic in Allen-Bradley's popular Type J, Type K, and Type G potentiometers. When temperature and space problems in your designs plague you, this new A-B "high temperature" potentiometer is a reliable answer. Please send for complete information, today.

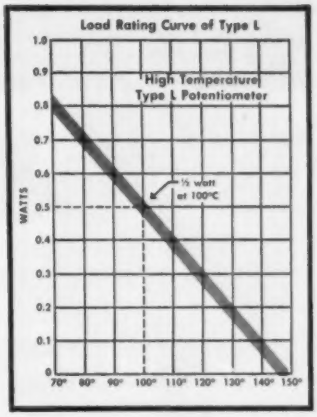

AMBIENT TEMPERATURE °C.

Load Capabilities of Type L below the Critical Resistance Value. Type L Far Exceeds the Requirements of MIL-R-94B.

ALLEN-BRADLEY

Quality Electronic Components

Allen-Bradley Co., 114 W. Greenfield Ave., Milwaukee 4, Wis. • In Canada: Allen-Bradly Canada Ltd., Galt, Ont.

←CIRCLE NO. 82 READER SERVICE CARD

CIRCLE NO. 83 READER SERVICE CARD 83

COMPLETE LINE OF TRANSISTOR TEST EQUIPMENT

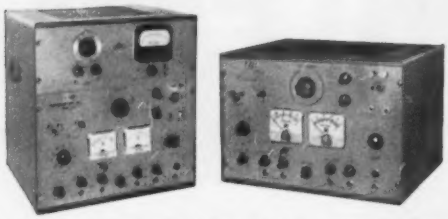

General Purpose Transistor Test Set, KP-2 Series • **Research and quality control with maximum reliability** • **Direct Precision Measurements** • **Up to 2 amps 200v.** Based on h parameters using basic straight forward circuitry. Features common bases or emitter, direct measurement of h parameters plus α and β cutoff, Meter indication of DC parameters — I_{co}, I_{eo}, V_{cer}, V_{ebr}.



Curve Tracer, Model MW-1

• Newest, most Versatile on market Features Highest maximums in broad ranges (up to 30 amperes and 300 volts — 450 watts maximum). Lowest impedance. Positive overload protection. Unique tube adapter allows vacuum tube measurements by external provision of screen and filament supplies.

Transistor Test Set, Model GP4

• Standard of the Industry for low power transistors. Measures h parameters and equivalent T coefficients. NPN and PNP junction and surface-barrier transistors, common base or emitter circuits α and β cutoff, and I_{co} and C_c. Measurement frequency from 100 cps to 1 mc.

Beta Tester, Model KT-1

• Lightweight • Portable • Easy to use. Measures Betas h_{fe} and I_{co}. This completely self-contained unit features a transistorized 1 kc oscillator and batteries, printed-circuit construction and meter overload protection.



Minority Carrier Lifetime Test Set, Model JJ

**Basic Tool for the Industry . . . Provides a reproducible measure of minority carrier lifetime of both germanium and silicon. Evaluates performance characteristics.



Semiconductor Resistivity Test Set

• Precise. • Easy to operate . . . Features exclusive FOUR-POINT-PROBE. Reliable applications for both production quality control and R&D. Measurement accuracy ±5%.

Component Selector Model NA-1

Designed primarily for incoming inspection or quality control testing a large number of 2 or 3-terminal components. • Capacity, 50 at one time. • Manual or foot switch operation. • Safety switching. • Manual reset.

Write today for further technical information on B/A test instruments to:

Baird-Atomic, Inc.

33 UNIVERSITY RD., CAMBRIDGE 38, MASS.

Baird® Atomic

STACKPOLE

Coldite 70+®

fixed composition RESISTORS

Today's slickest looking resistors . . . and every bit as good as they look! Unmatched for load life and moisture resistance. They're approved resistors—direct from a MIL-R-11 approved manufacturer. And now, for the first time, you can get such resistors in a full line of RC-42 (2-watt); RC-32 (1-watt) and RC-20 (½-watt) types IMMEDIATELY from distributors' stocks at rock-bottom prices!

Now! PICK 'EM OFF DISTRIBUTORS' SHELVES!

. . . for military prototypes, small runs, production emergencies or "hurry-up" projects

. . . in any standard value or tolerance

. . . at lowest prices in lots up to 1,000 resistors of a value

Complete stocks — and we mean *complete*—in the hands of the 28 selected Stackpole distributors listed below help you handle every job with highest quality resistors, fully proved and accepted for critical applications. Equally important, you actually get them at less than factory prices in lots up to 1,000 of a value!

These selected STACKPOLE distributors have them!

BALTIMORE, MD.
Kann-Ellert Electronics, Inc.

BATTLE CREEK, MICH.
Electronic Supply Corp.

BIRMINGHAM, ALA.
MG Electrical Supply Co.

BOSTON, MASS.
Sager Electrical Supply

BROOKLYN, N. Y.
Electronic Equipment Corp.

CLEVELAND, OHIO
Pioneer Electronic Supply Co.

DALLAS, TEXAS
Wholesale Electronics Supply Co.

DAYTON, OHIO
Srepco, Inc.

DENVER, COLO.
Denver Electronics Supply Co.

GLENDALE, CALIF.
R. V. Weatherford Company

INDIANAPOLIS, INDIANA
Radio Distg. Co.

KANSAS CITY, MO.
Burstein-Applebee Co.

MELBOURNE, FLORIDA
Electronic Supply

MIAMI, FLORIDA
Electronic Supply

NEW YORK, N. Y.
Harvey Radio Co.

PHILADELPHIA, PA.
Almo Radio Co.

SAN DIEGO, CALIF.
Radio Parts Co.

SCRANTON, PA.
Fred P. Pursell

SEATTLE, WASH.
C & G Radio Supply Co.

ST. LOUIS, MO.
Interstate Supply Co.

SYRACUSE, N. Y.
Morris Electronics of Syracuse

TACOMA, WASH.
C & G Radio Supply Co.

WASHINGTON, D. C.
Electronic Wholesalers, Inc.

WATERBURY, CONN.
Bond Radio Supply Co. Inc.

WEST PALM BEACH, FLA.
Goddard Distributors, Inc.

WICHITA, KANSAS
Interstate Electronic Sup. Corp.

WILBRAHAM, MASS.
Industrial Components Corp.

WINSTON-SALEM, N. C.
Dalton-Hege Radio Supply

. . . and G C/STACKPOLE, TOO!

Attractively packaged by G-C Electronics for service replacement uses, Coldite 70+ Resistors are also available through over 800 G-C distributors.

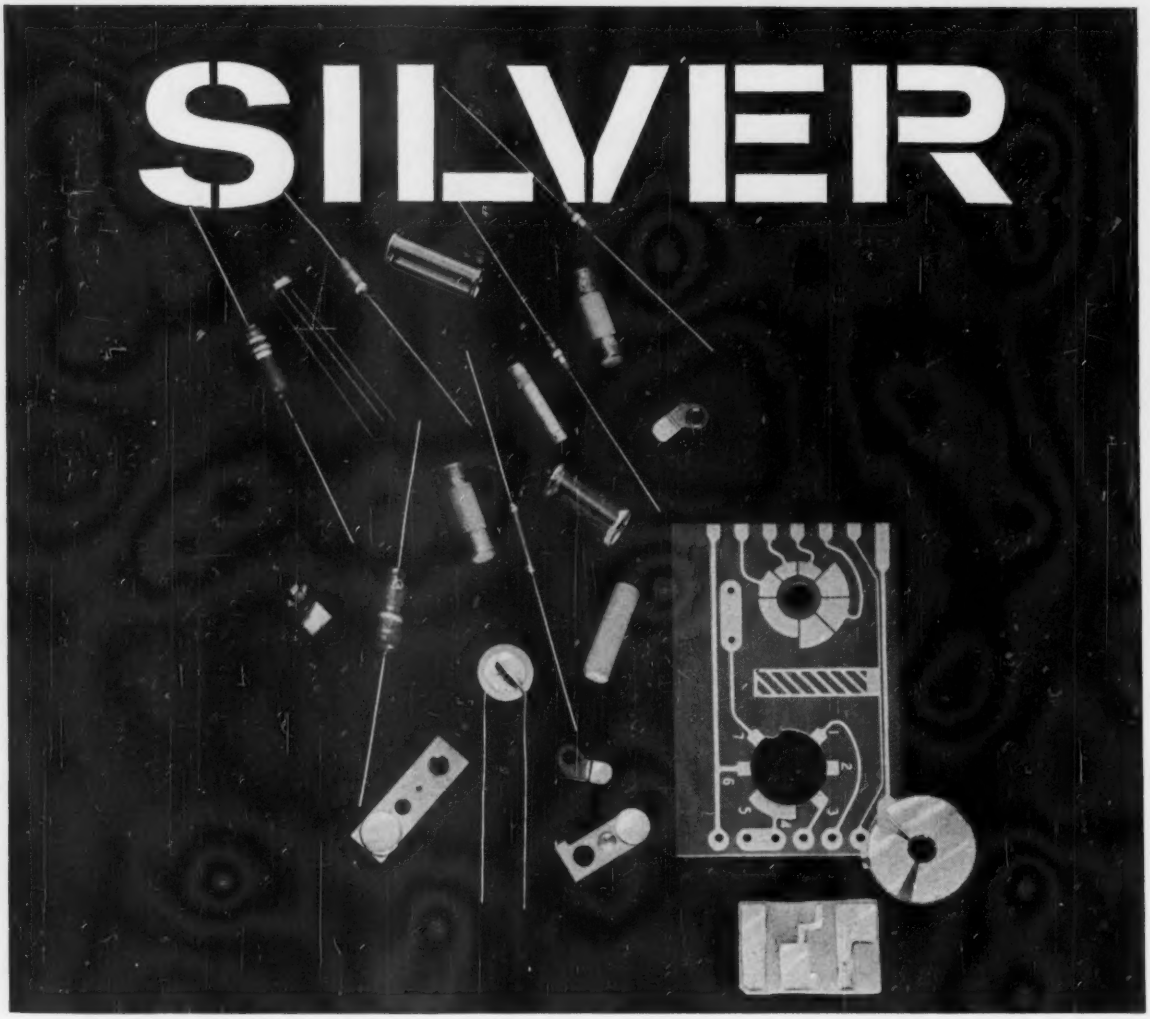

Handy & Harman Silver Powder and Flake for Electronic Applications

Among the many forms of silver and silver alloys manufactured by Handy & Harman are:

Fine silver (wire, strip and foil) • Silver anodes and grain for plating • Silver contact alloys • Silver powders • Silver flake, paints and paste • Silver brazing alloys • Silver electronic solders • Silver sintered metals • Solder-flushed silver alloys • Silver chloride and oxide • Coin silver (wire and strip) • Silver bi-metals

The increased acceptance of silver powder and flake in electronic circuitry and components has created a demand for a source that can supply these materials at a consistently high level of quality.

Handy & Harman manufactures silver powder and flake in all types and forms, for use in formulations on printed circuitry and wiring, resistors, condensers, thermistors, printed terminal strips on glass, ceramics or plastic laminates, etc.

If you are working on conductive or resistive coatings where you require excellent electrical conductivity, Handy & Harman will welcome the opportunity to assist you in the choice – or discussion of *any* silver product that may interest you. Write for Technical Bulletin A-4 on Silver Conductive Coatings and Bulletin A-5 on Silver Powder and Flake.

Our technical service and field application experience are at your disposal... we welcome inquiries on products and product problems involving any form of silver.

Your NO. 1 Source of Supply and Authority on Silver Alloys

HANDY & HARMAN

General Offices: 82 Fulton St., New York 38, N. Y.

DISTRIBUTORS IN PRINCIPAL CITIES

OFFICES AND PLANTS
ATLANTA, GA.
BRIDGEPORT, CONN.
PROVIDENCE, R. I.
CHICAGO, ILL.
CLEVELAND, OHIO
DETROIT, MICH.
LOS ANGELES, CALIF.
OAKLAND, CALIF.
TORONTO, CANADA
MONTREAL, CANADA

CIRCLE NO. 87 READER SERVICE CARD→

CLEAN ELECTRONIC PARTS CLEANER ULTRASONICALLY!

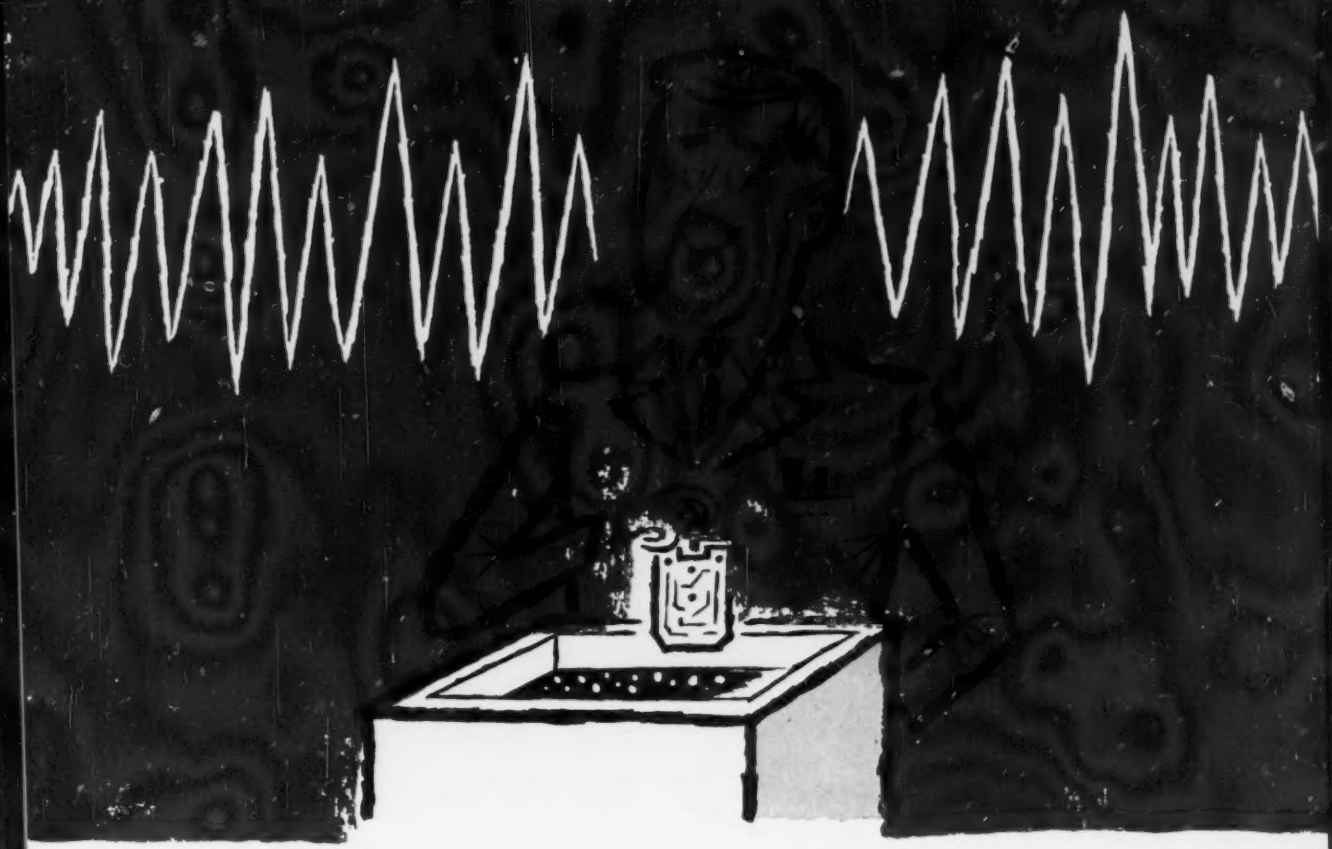

Save labor, save time – *blast* away dirt and dust by the remarkable ultrasonic method that Acoustica has developed to a fine point of efficiency. The hard-to-get-at parts in the most intricate electronic instruments are cleaned as easily as the most exposed parts. The powerful "cavitational" action of an Acoustica ultrasonic tank radiates to the innermost places, removes the most stubborn dirt or dust. Transistors, potentiometers, vacuum tubes, and scores of other products are thoroughly cleaned and decontaminated this modern, efficient way. Many leaders in the electronic industry have changed to Acoustica ultrasonic cleaning!

Acoustica is the recognized leader in quality ultrasonic cleaning equipment, the sole producer of the *Multipower* transducer. An Acoustica *certified* ultrasonic application is your assurance of maximum cleaning efficiency!

Acoustica Associates, Inc., Fairchild Court, Plainview, N. Y., 10402 Aviation Blvd., Los Angeles, Calif.

acoustica

THE GREATEST NAME IN ULTRASONICS

Practical secondary-emission pulse tube with...

ULTRA-FAST RISE TIME
HIGH PULSE CURRENT
AND DEPENDABLE LIFE

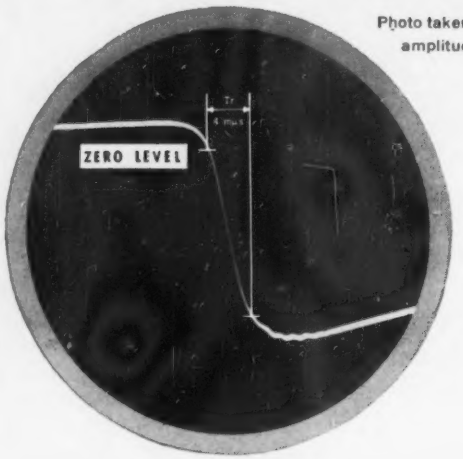

Photo taken with direct coupling to CRT. (T_r 1.5mμs): amplitude 1 amp., rep. rate 100kc.

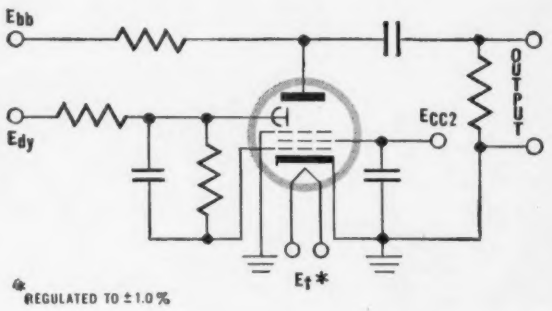

High-Performance Pulse Generator with Fast Rise Time

CHECK THESE CBS 7548 CHARACTERISTICS

Pulse output current	1 amp max
Rise time	4 mμs (N.S.)
Transconductance (I_b = 18 ma)	25,000 μmhos

Maximum Ratings for Pulse Service

Plate voltage	1000 vdc
Dynode voltage	300 vdc
Screen voltage	200 vdc
Plate dissipation	4 w
Dynode dissipation	3 w
Screen dissipation	1.4 w

The new CBS 7548 easily outperforms conventional tubes and transistors in triggered or free-running pulse generators. This practical secondary-emission tube generates in the circuit shown pulses with a rise time of less than 5 millimicroseconds. Its high dissipation ratings for plate and dynode permit an amplitude of one ampere or a repetition rate up to 300 kc. Under specified operating conditions, the tube has a life expectancy of 5000 hours. Note the simplicity of circuit made possible by this new break-through by CBS advanced engineering.

The miniature CBS 7548 also combines high transconductance with low capacitances for a gain-bandwidth product of 350 compared with 120 for a 6AK5. Check the characteristics. Write for Bulletin E-352 giving complete data.

More Reliable Products through Advanced Engineering

CBS tubes®

CBS ELECTRONICS, Danvers, Massachusetts
A Division of Columbia Broadcasting System, Inc.

©McGraw-Hill Publishing Company

Engineers in simulated Polaris test installation at Sperry's Marine Division check out inertial guidance system made by North American Aviation's Autonetics Division

INSTRUMENTS
for Design and Production

By WILLIAM E. BUSHOR, Associate Editor, ELECTRONICS

✓VOLTAGE, CURRENT AND POWER MEASUREMENT ✓IMPEDANCE MEASUREMENT ✓FREQUENCY MEASUREMENT ✓WAVEFORM MEASUREMENT ✓TUBE AND SEMICONDUCTOR TESTING ✓AUTOMATIC TESTING

exact information is the greatest aid to sound decision.....

TECHNICAL PROGRESS IN THE ELECTRONICS INDUSTRY depends to a large extent on the ability of the engineer to measure basic electrical parameters. Instruments capable of translating these invisible phenomena into quantities the physical senses can perceive are his tools.

ACCURACY—Demands of military and space programs have pushed the state of the electronics art to the point where even the Bureau of Standards routine accuracies of primary standards are inadequate in some measurement areas and nonexistent in others. Since design and production instruments are calibrated from secondary standards, they are necessarily an order of magnitude or more less accurate than the primary standard.

RANGE—Increasing need for measuring across wider ranges of parameters is bringing about a change in instrument design philosophy. Instead of using many instruments each of which covers a portion of the desired range, future instruments will cover a major portion of the useful range.

TRANSISTORIZATION—Transistors take up little space and generate little heat. This heat-reducing property is also possessed by cold-cathode vacuum tubes which are becoming more widely used in instruments. In terms of future design trends, it is anticipated that an increasing number of transistorized circuits will be utilized where economics permit and where instrument performance is comparable to that of electron-tube counterparts.

Packaging and human engineering are important aspects of Hewlett-Packard's design effort

DATA DISPLAY—Increasing use of test instruments by relatively unskilled operators means that test data must be presented simply and clearly. Use of digital presentation not only reduces reading time but also minimizes the chance of error.

AUTOMATIC OPERATION—The constant drive to reduce operating time and chance of human error indicates that many future instruments will be automatic or semiautomatic. Some manufacturers report that customers often require automatic testers since nontechnical operators are to use the equipment.

PACKAGING—Most manufacturers consider packaging an essential point in good instrument marketing, thus much design effort is channeled in this direction. Human-engineered controls and intelligently arranged scales are appearing on modern instruments instead of indiscriminately distributed switches and knobs, and hard-to-read scales.

MODULAR CONCEPT—Use of plug-in units and other interchangeable parts to increase an instrument's versatility is developing rapidly. This design trend is particularly important since many operators are neither engineers nor highly skilled electronic technicians. Modular construction permits servicing of instruments by replacing individual modules.

MINIATURIZATION—There is a continuing trend toward obtaining more instrument function per unit volume. Since instruments are required to perform an increasing number of functions, control-panel space is becoming precious. Operators of test equipment want the control knobs and buttons close together and handy to use, thereby reducing unnecessary and time-consuming motion. Miniaturization is particularly important where instruments are to be incorporated in panels of larger equipment.

SELF-CONTAINED CONCEPT—Many manufacturers are concentrating on the development and production of instruments requiring no external power or auxiliary equipment. Instruments capable of both bench and portable operation are becoming more common. Instrument makers report users are asking for bench instrument capabilities in portable equipment.

Test instruments are defined in the following pages to be those used to scale, record or measure one or more electrical parameters of a signal. Sources and modifiers used with these instruments are outside the scope of this report.

Digital techniques promise great accuracies for routine voltage measurements, also better readability. Present accuracy requirements for r-f power measurement often exceed capabilities of available instruments. Direct-reading noise-figure meters are in demand

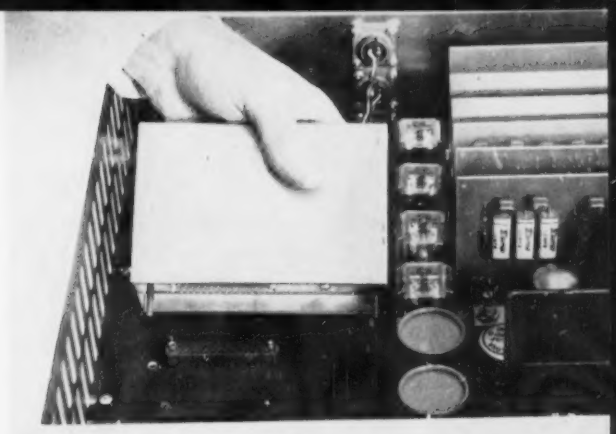

Voltage, Current and Power Measurement

ALTHOUGH INSTRUMENTS for measuring electrical voltage, current and power have been with us for many years, there is a virtual revolution going on in meter design and packaging. Overall trend toward miniaturization, portability and high accuracy compatible with simplicity of operation is evident. Ruggedness, compactness and adaptability to bench and panel use are important design considerations.

VOLTAGE MEASUREMENT—Manufacturers feel there could be a real breakthrough in meter accuracy limitations if more convenient production standards were available. One company reports that production of meters with ¼-percent accuracy over temperature range of —55 to +71 C requires production standards of 0.02-percent accuracy or better. Some standards laboratories claim they can do better than 0.02 percent but will not certify any better. Thus 0.02-percent accuracy is the limit that can be achieved in practice using presently available standards. See Tables I and II.

In general, trends in voltmeter design are toward greater sensitivity, higher stability, faster response time and simplified field maintenance.

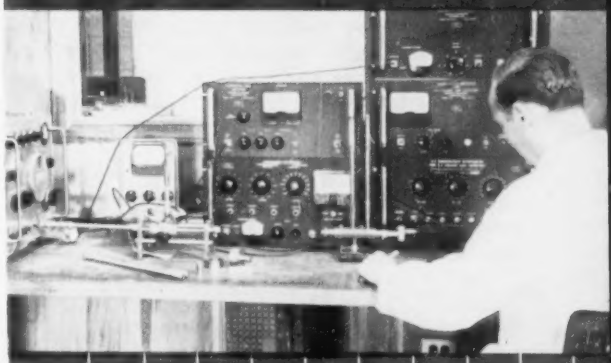

Development of broadband attenuators at Weinschel Engineering, using combination dual and single-channel audio-substitution-type insertion-loss set, is shown above plot

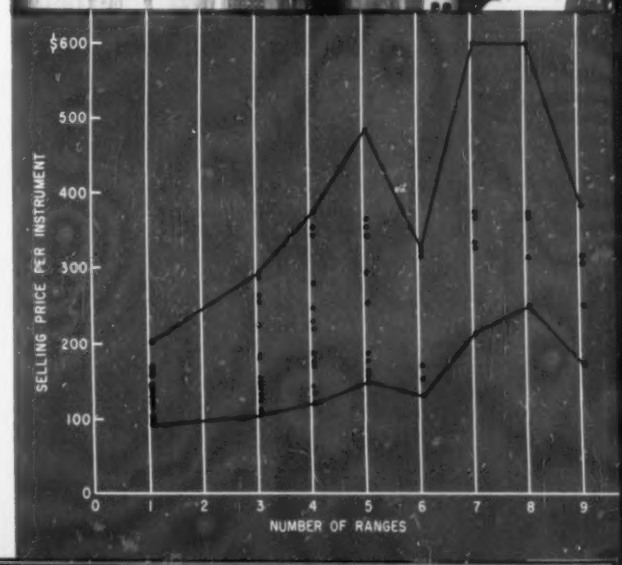

FIG. 1—Selling price goes up as number of ranges available on typical nonelectronic voltmeters with 0.5-percent accuracy is increased

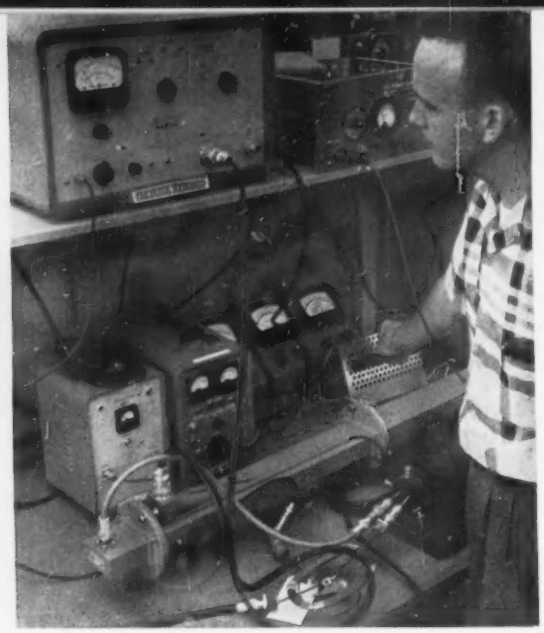

Engineer makes adjustments necessary to optimize noise figure within a system using Hewlett-Packard's noise-figure meter

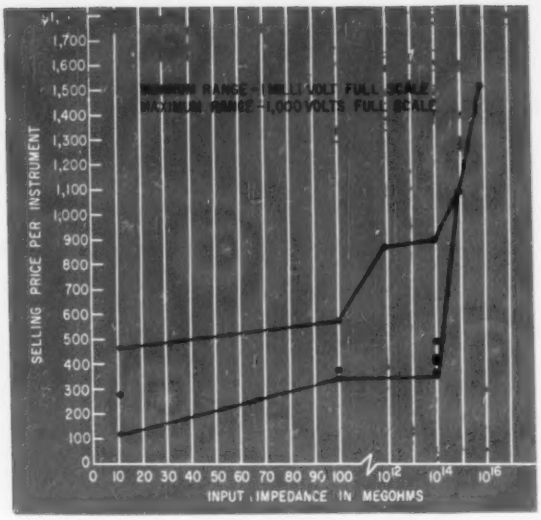

FIG. 2—Selling price as a function of input impedance for vtvm's with one to three-percent accuracy

ANALOG VOLTMETERS—For some applications, it is felt that reading accuracy of analog voltmeters can be enhanced by using a suspension movement carrying a mirror which reflects a beam of light on the scale. Since this technique eliminates the conventional pointer, it is particularly useful in measuring minute voltages.

Other significant advances are the development of taut-band suspension and expanded-scale techniques.

There is a need for instruments with wide voltage ranges, for example 100 microvolts to 10,000 volts; however, the upper and lower extremes are not universally useful. Selling price as a function of number of ranges for nonelectronic voltmeters is shown in Fig. 1.

There has been a continuous demand for higher and higher input impedances in vacuum-tube voltmeters. Often these instruments are selected largely because of their input impedance characteristic. Sell-

Measurement Accuracies

A survey completed early this year determined the measurement accuracies desired by manufacturers in various categories and compared them with the best routine accuracies of the National Bureau of Standards. NBS' best routine accuracy is used because the best obtainable accuracy is often difficult to determine and usually depends on amount of time, effort and money available. (Detailed tabulations of the survey results bearing on electrical measurement are given in appropriate sections of this report.)

The survey was undertaken by the Quality Control Committee of the Aerospace Industries Association at the suggestion of the Air Materiel Command, and was sponsored by Sperry Gyroscope Company. A general summary of results was given earlier (ELECTRONICS, p 16, Aug. 21, 1959)

Table I—Desired Accuracies in D-C Measurements

Category	Are Existing Accuracies Sufficient? (No. of Firms that Replied)		Desired Accuracy		Nat'l Bureau of Stds	
	Yes	No	%	No. of Firms	Range	Routine Accuracy %
CURRENT						
1 μamp to 1 amp	41	2	0.001 0.01	1 1	1 μamp to 1 amp	0.05
1 amp to 100 amp	38	5	0.001 0.01	2 3	1 amp to 100 amp	0.05
VOLTAGE						
Saturated Standard Cells	13	4	10^{-4} 10^{-4} 0.0004 ±1 μv	1 1 1 1	.....	0.0002
Unsaturated Standard Cells	27	6	0.00004 0.005 0.002 0.001 0.1	1 1 2 1 1	.....	0.01
Potentiometers	29	5	0.005 0.002 0.001 0.01 0.1	1 1 1 1 1	.....	0.01
Digital Voltmeters	26	10	10^{-4} 0.005 0.05 0.01	2 1 6 1	.....	0.05
Ratio—Standard Voltage Dividers	32	11	10^{-4} 10^{-4} 0.05 0.01 0.001	2 2 3 3 1	1.5 to 1,500 v	0.01

Table II—Desired Accuracies in A-C Measurements

Category	Are Existing Accuracies Sufficient? (No. of Firms that Replied)		Desired Accuracy		National Bureau of Standards		
					Range		Routine Accuracy %
	Yes	No	%	No. of Firms	Freq	Magnitude	
CURRENT							
15 ma to 20 amp	22	4	1 0.25 0.01	1 1 2	60 cps to 30 kc	15 ma to 20 amp	0.05
Ratio of Current Transformers	19	3	0.04 0.05	1 2	60 cps	0.25 to to 4,000 amp	0.1% ratio 3' phase angle
VOLTAGE							
1 to 300 v 20 cps to 10 kc	39	16	0.1 0.01 0.02 0.05 0.001	2 4 3 4 3	.....	0.01 to 1,000 v	0.05
Other Voltage and Frequency Ranges	28	7	0.01 0.05 0.1	1 3 3	30 kc	600 v	0.05
Standard Ratio Transformers	27	2	0.0001 0.05	1 1	60 cps to 10 kc	.....	0.01
Pulse	16	5	0.1 0.5 1	2 2 1	.....	High voltage	1
Pulse Dividing Ratio	4	1	1	1	.....	High voltage	1
C-W on Balanced Line	12	3	5 1	1 2	No measurement		
C-W on Unbalanced Line	18	10	5 1 0.5 0.1	2 4 3 1	30 kc to 100 mc 100 to 400 mc	0.2 to 500 v 0.2 to 100 v	2 3
R-F Pulse	2	5	5 1 0.5	2 2 1	No measurement		
R-F Potentiometers	2	1	1	1	30 kc to 500 mc	1 mv to 0.1 v	3
Signal Generators (sine wave)	18	7	5 1 0.5 0.1 10^{-9}	1 2 2 1 1	500 to 1,000 mc	100 μv to 0.1 v	5
Impulse Generators	7	1	5	1	No measurement		

FIG. 4—Selling price as function of frequency range for typical field-strength meters. Instruments are portable unless otherwise indicated

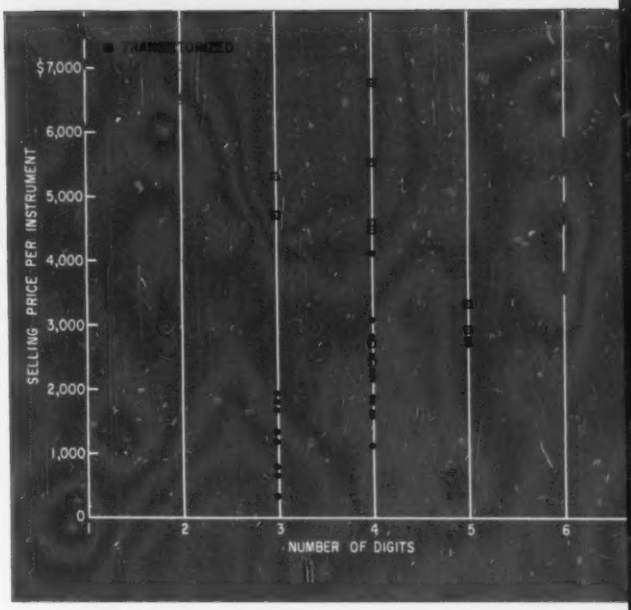

FIG. 3—Selling price of both vacuum tube and transistor d-c digital voltmeters rises as number of digits displayed increases

ing price of vtvm's as a function of input impedance is shown in Fig. 2.

DIGITAL VOLTMETERS—Since digital voltmeters usually operate on the potentiometer principle of measurement, they promise accuracies comparable with the movements available in analog meters—but at a somewhat higher cost. Compatibility with data processing and computer equipment together with readout speed make digital voltmeters extremely useful. Selling price as a function of number of digits is shown in Fig. 3.

Miniaturization of digital voltmeters is a recent design trend. As a result, measuring equipment will take up less space—a particularly valuable feature for instruments used in aircraft.

Meters which are capable of converting measurement into a verbal readout promise even greater

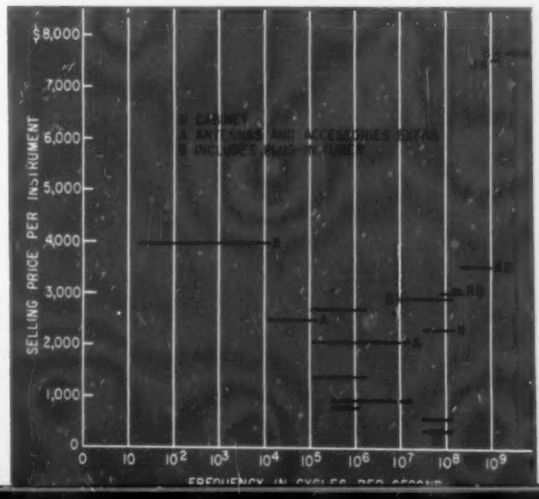

Table III—Desired Accuracies in Power Measurements

Category	Accuracies Sufficient? (No. of Firms Replying)		Desired Accuracy		National Bureau of Standards		
					Range		Routine Accuracy
	Yes	No	%	No. of Firms	Freq	Magnitude	%
Power	30	6	0.01 0.1 0.05 0.25	1 1 2 2	d-c to 1 kc	0.1 to 100 amp 30 to 1,000 v	0.05 to 0.1
R-F POWER							
Balanced Lines	6	1	1	1	No measurement		
Unbalanced Lines	12	8	5 3 2 1 0.5 0.1 0.01	1 1 1 2 1 1 1	1 to 100 mc 100 to 300 mc	1 to 10 mw 1 to 100 mw	1
Interference Radiated	16	2	5 3 db	1 1	No measurement		
Interference Conducted	16	2	5 3 db	1 1	No measurement		
MICROWAVE							
Unmodulated Power with Calorimeters	14	9	2 1.5 1	4 3 2	No measurement		
Unmodulated Power with Bolometer Bridges	21	13	10 5 2 1 0.5 0.1 2 db	3 2 3 1 2 1 1	8.2 to 12.4 kmc	1 to 10 mw	1
Unmodulated Power with Directional Couplers and Bolometer Bridges	11	11	10 5 3 2 1 0.1	2 2 1 3 4 2	8.2 to 12.4 kmc	1 to 10 mw	1
Pulsed Power, Peak (Calorimeters)	7	4	2 5	2 2	No measurement		
Pulsed Power, Peak (Couplers and Bridges)	9	4	10 5 3 2	1 1 1 1	No measurement		
Attenuation on Unbalanced Lines	10	6	0.05 0.8 1 0.1 0.01	1 1 1 1 2	30 to 300 mc	0.1 to 70 db	0.05 db +0.1% of attenuation in db
Attenuation Below 0.1 db	7	4	1.5 10 1	2 1 1	No measurement		
Attenuation 0.1 db to 45 db	16	9	1.5 1 0.2 0.1 0.05 db 2 0.8 0.01	1 1 1 2 1 1 1 1	300 mc 12.4 mc	.....	0.1 db waveguide 0.2 db coax or 1%
Attenuation Above 75 db	7	5	5 2 1.5 1 0.05	1 1 1 1 1	No measurement		

convenience and safety in some applications.

CURRENT MEASUREMENT—Since the principle upon which ammeters and voltmeters operate is the same, the comments on voltage measuring instruments apply equally well to ammeters. An additional trend, however, is the development of ammeters which externally measure the alternating or direct current flowing through a wire by sensing the strength of the magnetic field produced.

POWER MEASUREMENT—Trend in wattmeter design is not only toward higher accuracies, but also the use of linear a-c scales. Many present square-law scales emphasize readability during overload conditions at the expense of readability under normal conditions. Linear scales give equal emphasis.

One of the problems in power measurement is the fact that the measuring instrument itself consumes power. This problem has been resolved somewhat by recently announced commercially available wattmeters which consume only milliwatts of power.

In the field of r-f power measurement, the state of the art is being pushed with regard to accuracy. See Table III.

NOISE-FIGURE METERS—Conventional techniques of measuring noise figure which involve many pieces of apparatus are being supplemented by meters capable of dynamic, continuous display of noise figure. Not only do these devices eliminate time-consuming setup and adjustment, but they overcome the necessity of determining the effective power gain-bandwidth product and the difficulty of measuring the available signal power at the low levels involved. Design effort is being expended to assure reliable performance by improving ease of alignment to automatize the instrument and to eliminate periodic recalibration. Automatic operation has already been obtained for 0- to 36-db noise figure over a 12-mc to 40-kmc range.

POWER RATIOMETERS—Determination of antenna patterns, amplifier gains and r-f attenuation requires measurement of relative r-f power levels over a wide dynamic range. The problem in this area is to design instruments capable of accurately measuring minute power levels. At present a dynamic range of —15 dbm to —87 dbm can be measured with a precision of 0.01 db and an accuracy of 0.02 db/10 db over frequency range of 100 to 4,000 mc.

FIELD-STRENGTH METERS—Radio-frequency energy received at an antenna associated with a field-strength meter is converted to a voltage which is a function of field strength. Since a wide range of field strength is normally encountered, the readout is scaled logarithmically; however, the trend is toward use of linear scales for easier reading. Continuous effort is being made to make portable instruments more compact and lighter. Selling price of field-strength meters as a function of frequency range is shown in Fig. 4.

Accuse not nature, she hath done her part; do thou but thine . . .

Emphasis is on less complicated measurement of resistance, inductance and capacitance. Direct-reading instruments for measuring standing-wave ratio are coming into wide use

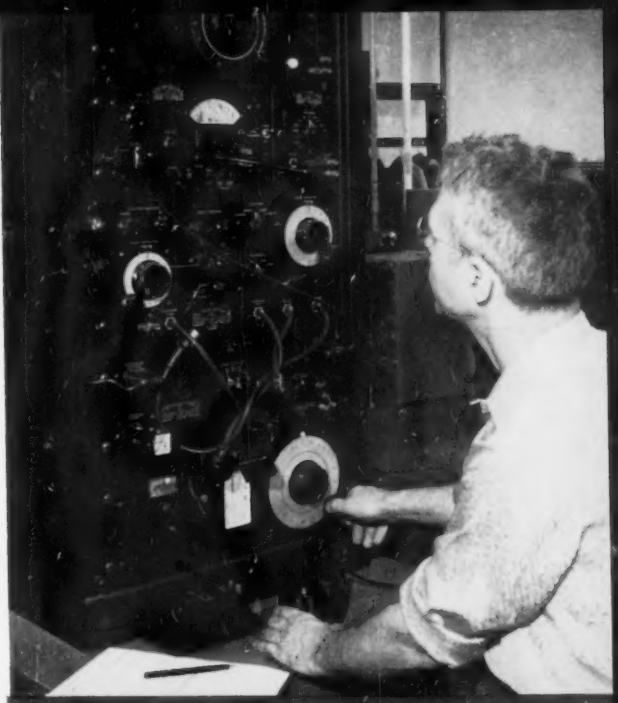

Calibrating capacitance test assembly against standard capacitor at Goodyear Aircraft's standards laboratory

Impedance Measurement

IMPEDANCE MEASUREMENT is probably the most important measurement made in design and production of electronic equipment. Trend in impedance measuring instruments is toward shorter setup time, greater simplicity, foolproof readout, in-line digital presentation, automatic decimal-point indication and automatic display of units of measurement next to the answer. Trends in design of impedance measuring equipment have been largely influenced by the development of closer tolerance components. See Table IV. This condition can be expected to continue.

RESISTANCE MEASUREMENTS—When considering measurement of resistance, it is necessary to separate the d-c from the a-c methods. For d-c measurement, the Wheatstone bridge is generally used. In the case of low resistances, a Kelvin double bridge is required. Measurement of high resistances is ordinarily done with a vacuum-tube detector used in conjunction with the bridge. Direct deflection methods are also used; examples being the megohmmeter and ohmmeter. For still higher resistances, up to 10^{16} ohms, an electrometer is required. Selling price of

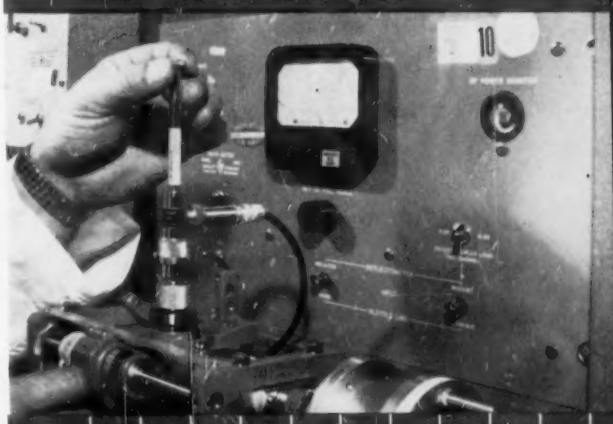

Performing functional acceptance test on an antenna from a Polaris test missile at Lockheed Missiles and Space Division, using slotted-line set to measure vswr, is shown above plot

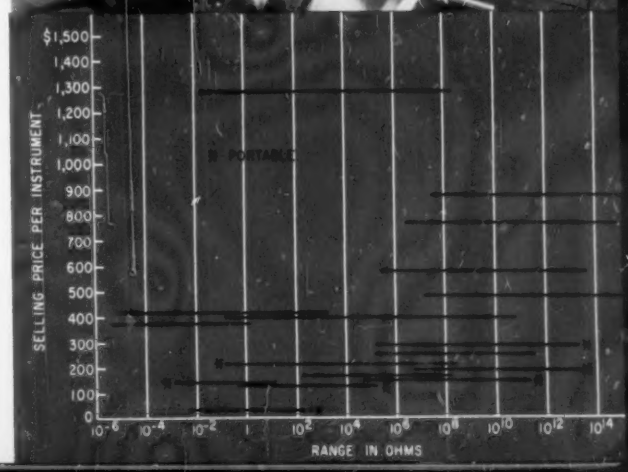

FIG. 5—Selling price as a function of range for typical ohmmeters. Combination volt ohmmeters are not included

Table IV—Desired Accuracies in Impedance Measurements

Category	Are Existing Accuracies Sufficient? (No. of Firms that Replied)		Desired Accuracy		National Bureau of Standards		
					Range		Routine Accuracy
	Yes	No	%	No. of Firms	Freq	Amplitude	%
D-C Resistance of Standard Resistors	32	10	0.0002 0.0001 0.002 0.001 0.01	1 2 2 3 2	.....	1 ohm 0.001 to 100,000 ohm 0.0001 ohm	0.0005 0.002 0.01
Inductance	39	6	0.05 0.01 0.2 0.1	1 2 2 1	60 cps 100 cps 400 cps 1 kc	100 μh to 10 h	0.03 to 0.1
Inductance of Search Coils	15	1	5	1	.....	.....	0.25
Capacitance of Fixed Standards	29	11	0.1 0.05 0.02 0.01 0.002	1 2 3 3 2	60 cps 100 cps 400 cps 1 kc	100 $\mu\mu$f to 1 μf	0.03 to 0.1
Capacitance of Variable Standards	24	6	1.0 0.1 0.05 0.01 0.001	1 1 2 1 1	60 cps 100 cps 400 cps 1 kc	100 $\mu\mu$f to 1 μf	0.03 to 0.1
Q of Standard Coils	22	4	1.0 0.05	2 2	No measurement		
Loaded Q of Fixed Resonant Cavity	2	4	5 3 1	1 2 1	No measurement		
Loaded Q of Tunable Frequency Meter	1	4	5 3	2 2			
R-F Impedance	9	6	2 1 0.5	2 3 1	30 kc to 300 mc	1 ohm to 1×10^4 (ohms) / $2\pi f$(mc)	1 (including Q)
Vswr with Slotted Lines	15	7	2 0.02 0.005 0.001	2 3 1 1	No measurement		
Vswr with Reflectometers	12	1	5	1			
Vswr of Standard Mismatches	9	3	0.001 0.005 0.02	1 1 1	8.2 to 12.4 kmc	1.01 to 1.5 vswr	±0.1

ohmmeters as a function of range covered is shown in Fig. 5.

Measurements of a-c resistance at low frequencies can be made with an a-c form of the Wheatstone bridge. Bridge measurements are also used at frequencies as high as 150 mc; over this frequency instruments with distributed capacitance, usually coaxial lines, are used. Among distributed capacitance instruments are the slotted line and the admittance meter, both of which can be used up to a few hundred megacycles; beyond this frequency, slotted sections of waveguide are required. In addition to the direct measurement of resistance, the low resistance of reactive elements is measured in terms of dissipation factor, in the case of capacitances, or of Q, in the case of inductors.

Digital ohmmeters are coming into wide use because they are capable of being used as general-purpose instruments alone or in conjunction with input scanners and digital data recorders. These instruments are valuable because of their completely automatic operation and range switching, high speed, high accuracy, presentation of data in easily read numerical form, ruggedness, ease of use by untrained personnel and wide measuring ranges.

INDUCTANCE AND CAPACITANCE MEASUREMENTS—Inductance and capacitance are measured at power-line, audio and radio frequencies with impedance bridges. Other instruments, such as the Q meter, are also used in the radio-frequency range. Simple capacitance meters which are, in effect, a-c ohmmeters are used in some applications. Coaxial-line instruments such as slotted lines, admittance meters, transfer function and impedance/admittance bridges are used at frequencies between a few hundred and a few thousand megacycles; at still higher frequencies, the slotted sections of waveguide take over.

Capacitance measuring equipment is now available in one integrated assembly. Self-balancing feature is presently being incorporated in many types of impedance-measuring equipment to speed up test procedures. In addition to extended range, instruments of the future will include rack-mounting accommodations, variable oscillator-detectors, and reduced residual error and null drift resulting from temperature changes.

Self-powered portable instruments are in demand and will be produced in greater quantity and variety in the next few years.

Inductance bridges are now on the market having built-in oscillator-detectors for measurement of 0.002 microhenry to 1.1 henrys of inductance. These instruments are capable of measuring inductances that vary appreciably with frequency, such as those wound on powdered iron or iron-alloy cores. Trend is toward design of bridges with improved ability to pass d-c current for incremental inductance measurements, extended frequency range and reduced residual errors.

VSWR MEASUREMENT—Ratiometers for measuring voltage standing wave ratio are becoming widely accepted. When used in conjunction with oscillographic recording equipment, instantaneous plots of vswr as a function of frequency can be produced. These devices can be used as continually tunable, direct-reading laboratory instruments or as production line go, no-go testers.

Accuracy requirements are approaching standards capability. Frequency counters are supplementing frequency meters in many applications

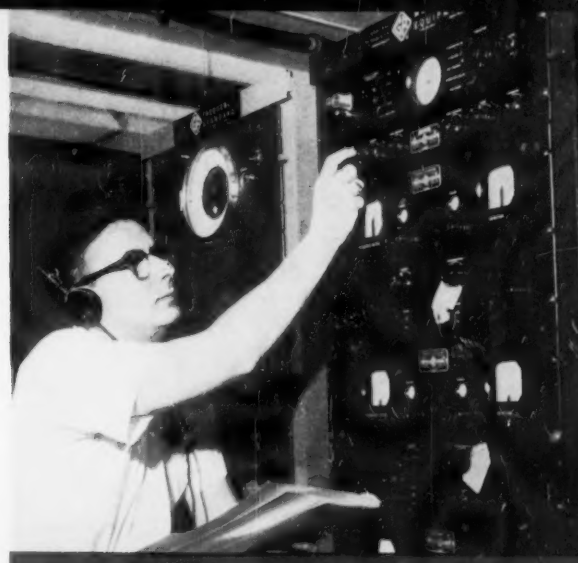

Engineer calibrates frequency-measuring equipment against frequency standard at General Radio's plant

Frequency Measurement

"Just the minute you get satisfied with what you've got, the concrete has begun to set in your head" . . . Kettering

FREQUENCY is the electrical parameter that can be measured most accurately. Some commercially available instruments attain accuracies of 1 part in 10^{9} thereby approaching the limit of the art with their routine performance. This condition has been achieved because electronic circuits are capable of adding, subtracting, multiplying and dividing with great precision frequencies generated by a high-quality standard. See Table V.

Manufacturers of frequency-measuring equipment report they are constantly asked to extend the frequency range of their instruments to higher and lower ranges and also improve their power-handling capacity. An example of changing requirements which drastically affects the instrument industry is single-sideband communications equipment which requires oscillator stabilities of 5 parts in 10^{7} per week where previously 2 parts in 10^{6} per week was acceptable.

A definite range of parameters has been established for frequency-measuring instruments since, under the new FCC regulations, many tolerances must be held to 0.0005 percent. Some instrument manufacturers are planning to announce next year relatively inexpensive instruments which will meet these FCC requirements.

In view of anticipated tightening of tolerances and

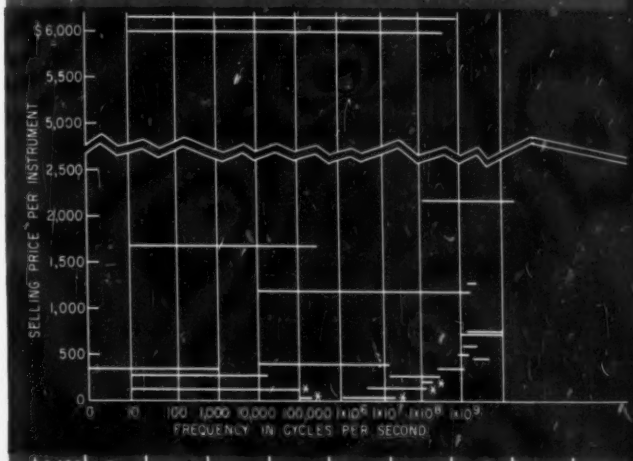

FIG. 6—Selling price as a function of range for frequency meters requiring no external power

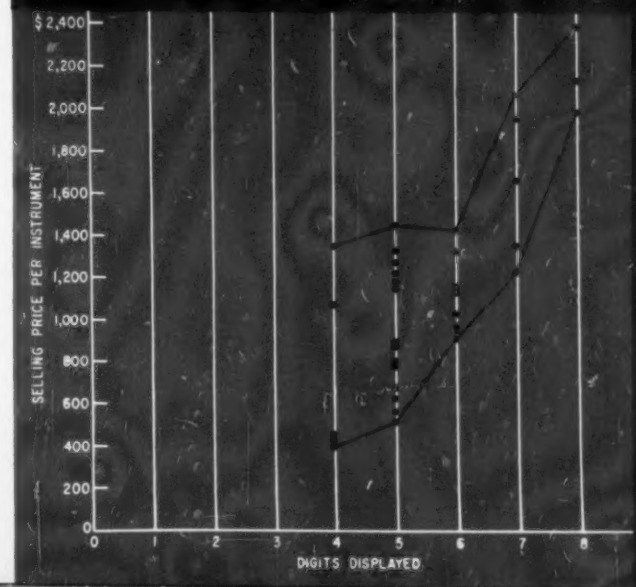

FIG. 7—Selling price of digital frequency counters as function of number of digits displayed

Table V—Desired Accuracies in Frequency Measurements

Category	Are Existing Accuracies Sufficient? (No. of Firms that Replied)		Desired Accuracy		National Bureau of Standards		
					Range		Routine Accuracy
	Yes	No	%	No. of Firms	Freq	Amplitude	%
R-F of Crystal Oscillators	26	5	0.031 10^{-3} 10^{-4} 5×10^{-5}	1 2 1 1	100 kc to 100 mc	1 to 10 v	1×10^{-4}
R-F of Multiplied Signal from Crystal Oscillator	16	5	0.01 0.01 10^{-7} 10^{-8}	1 1 2 1	100 kc to 10 mc	1 to 10 v	1×10^{-9}
Resonant Cavity (fixed)	16	4	0.01 2 mc 2×10^{-6} 10^{-9}	1 1 1 1	to 75 kmc	.....	Determined by stability and resettability of instrument
Maser meter (tunable)	0	2	10^{-7} 10^{-8}	1 1	No measurement		

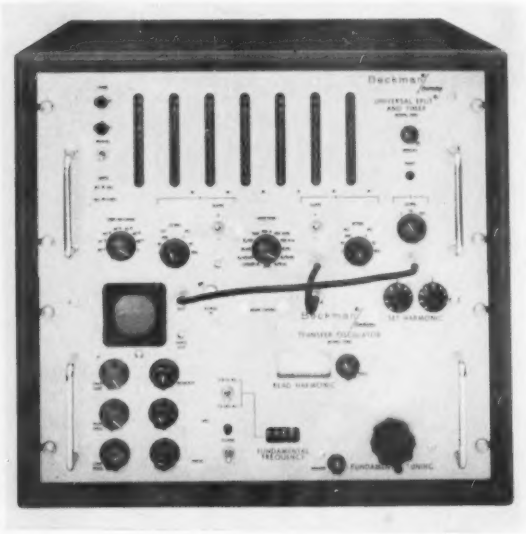

Frequency counter made by Beckman's Berkeley division

increasing of band spread and spectrum coverage, instruments presently on the drawing board will be designed to satisfy future requirements on a long term basis. These instruments will also have extended range facility.

FREQUENCY METERS—For commercial power-line frequencies, direct-indicating instruments are available and frequency meters of the vibrating-reed type are common. At frequencies up to a few megacycles, direct-indicating frequency meters, usually of the pulse control type, can be used. Selling price of frequency meters as a function of range covered is shown in Fig. 6.

At audio frequencies, most measurements are based on frequency standards of the quartz crystal or atomic types. These basic frequency standards, with their auxiliary frequency multiplying and dividing equipment, can also produce a harmonic series of standard frequencies throughout the radio-frequency spectrum. Other auxiliary equipment is available that enables the operator to interpolate between any two of these harmonics to identify exactly any unknown frequency.

Absorption-type wavemeters are mostly used now for approximate measurements. Instruments in wide use now include heterodyne frequency meters and grid-dip meters.

One design trend is the use of cast aluminum in fabrication of frequency-meter chassis. This method of construction permits casting of a cellular-type chassis which, besides providing excellent r-f shielding, eliminates the more intricate mechanical fabrication found in conventional chassis. By cantilever-mounting a number of these chassis to an extra thick front panel, assembly and test procedures can be simplified.

Design of frequency standards is tending toward reduction of physical size and weight while meeting tougher military requirements. In the last few years, the size of frequency standards has been reduced to one fifth of their former size with a commensurate reduction in weight.

FREQUENCY COUNTERS—A widely used frequency-measuring device for routine measurement is the digital counter. This device counts the number of cycles of the unknown frequency in a predetermined time interval. A crystal oscillator is used as an internal frequency reference for these instruments. Such instruments are supplementing conventional high-accuracy frequency measuring equipment at a rapid rate. Selling price of frequency counters as a function of the number of digits displayed is shown in Fig. 7.

Because counter-type frequency-measuring instruments generally give readings automatically in direct numerical form, they can be used effectively by nontechnical personnel.

MODULATION METERS—Modulation measurement is becoming increasingly more important. It is of primary significance in power generating units driven by gasoline engines or Sunstrand drives. Servo systems give a good deal of trouble when the voltage or frequency modulation introduced by the prime power source exceeds certain low limits. Instrumentation for these measurements is still rapidly developing, but the trend seems to be toward instruments which can measure accurately smaller and smaller percentages of modulation over a wider and wider frequency band.

To hold, as t'were, the mirror up to nature

Semiconductor testing requirements are promoting development of ultrahigh-speed oscilloscopes. Distortion measuring instruments are now essential for quality control of electronic equipment

Engineer evaluates performance of high-speed switching transistor with Tektronix electronic sampling oscilloscope

Waveform Measurement

BASIC INSTRUMENTS for analyzing waveforms or measuring phase are the oscilloscope and oscillograph. Components of a complex waveform are often identified and measured using a wave analyzer or tuned voltmeter. When overall evaluation of the total harmonic content is wanted, a distortion meter can be used. Since wave analyzers and distortion meters operate primarily in the audio-frequency range, it is necessary to use spectrum or phase analyzers at higher frequencies.

OSCILLOSCOPES—Two oscilloscope parameters—sensitivity and bandwidth—are receiving a considerable amount of attention and will continue to do so. By increasing sensitivity and expanding bandwidths to accommodate higher frequencies, heretofore unobservable waveshapes can be investigated.

Need for instruments capable of measuring outputs of ultrahigh-speed switching devices on the production line has recently been fulfilled by sampling and traveling wave tube oscilloscopes. Because of convenience of operation and sensitivity, the sampling types will have much wider general purpose use. Since traveling-wave-tube oscilloscopes can display 0.2 millimicrosecond pulse with rise times they are all fitted for specialized applications, such as display of single transient pulses. Selling price of oscilloscopes as a function of rise time and sensitivity is shown in Fig. 8.

Switching devices currently under development will have 0.1 millimicrosecond rise times and pulse widths of one millimicrosecond or less. For this

Operator at John Oster Manufacturing Co. measures phase angle and transfer voltage characteristic of tachometer using North Atlantic phase angle voltmeter

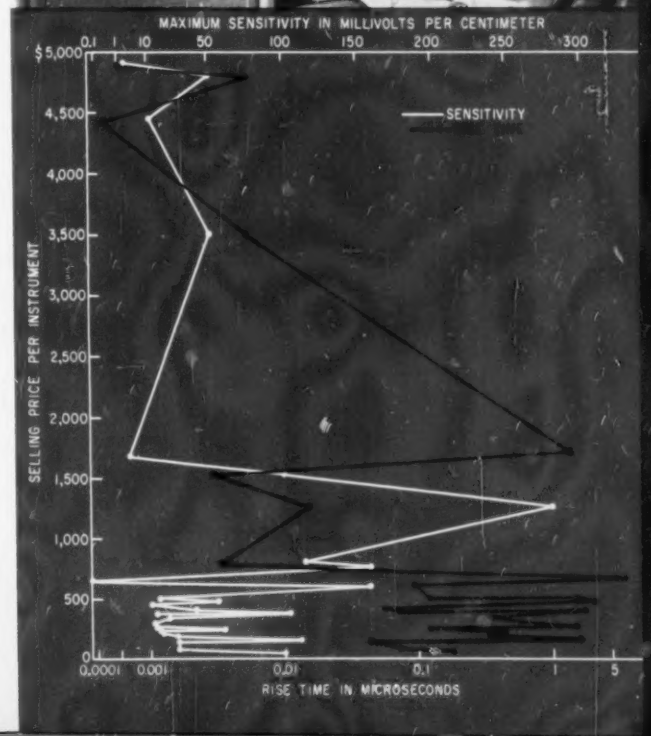

FIG. 8—Selling price of oscilloscopes as a function of rise time and maximum vertical sensitivity. Dual and multichannel types are not included

Table VI—Desired Accuracies in Waveform Measurements

Category	Are Existing Accuracies Sufficient? (No. of Firms that Replied)		Desired Accuracy		National Bureau of Standards		
					Range		Routine Accuracy
	Yes	No	%	No. of Firms	Freq	Amplitude	%
Phase Angle with Phase Meters	31	3	0.5 deg 0.1 deg 0.01 deg	1 1 1	400 cps	360 deg	0.1 deg Could be improved if justifiable
Phase Angle of Phase Signal Generators	9	1	0.01 deg	1			
R-F Phase Angle	7	4	1 0.5 0.1	1 1 2			
Phase with Slotted Lines	5	3	2 1 0.1	1 1 1	No measurement		
Phase of Phase Shifters	3	4	2 0.5 0.1	1 1 2			
Pulse width	19	3	1 mμsec 0.01 μsec	1 2			
Delay on Delay lines	12	2	1 mμsec 0.01 μsec	1 1			

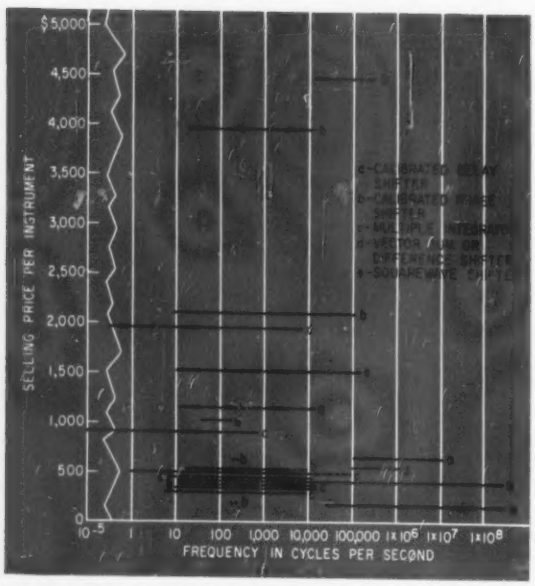

FIG. 9—Selling price of phase meters as a function of frequency range

reason, there is a trend toward development of even faster oscilloscopes for the millimicrosecond field.

Trend is toward using swept r-f and marker generators to provide instantaneous graphs of r-f voltage as a function of frequency. Several test equipment manufacturers are producing instruments that include high-quality generators of this type. Various ranges of frequencies are covered, particularly below 1,000 mc. Soon-to-be-announced generators will feature watts of power rather than milliwatts, sweep widths as wide as 500 mc, ranges extending to 2,300 mc, plug-in marker units, and variable sweep rates providing continuous control from 1 cycle per 2 or 3 minutes to 60 cycles per second.

OSCILLOGRAPHS—These instruments cover a broad spectrum of frequency response, from a few cycles in the case of the chopper type recording ammeter to over 100 kc in the case of multiple crt types. Usefulness of these devices will be enhanced when more writing channels are made available to handle the multitudinous outputs currently being tested. Current design trends are towards improvement of pen function in ink writing oscillographs, reduction in cost of paper and easier maintainability of jets in liquid ink stylii.

PHASE METERS—Measurement of phase shift has become important in recent years because of the development of computing transformers, computing amplifiers and resolver systems. Although many devices for measuring phase and phase shift are available, in many critical applications the capability of the instruments is approaching the limit of the art. See Table VI. Presently available vector sum or difference and calibrated delay phase meters are operable to 200 or 300 mc, but industry is already demanding the range be extended to one kmc. High accuracy below one cycle and up to one kc can presently be obtained with phase counters, thus no immediate measurement problem exists in lower frequency ranges. Selling price of phase meters as a function of frequency range is shown in Fig. 9.

DISTORTION METERS—Demand for simple harmonic distortion measuring devices is increasing in design, test and production work. Design emphasis is toward avoiding introduction of distortion by the instrument itself and assuring inclusion of high-order harmonics in the voltmeter readings.

WAVE ANALYZERS—Important characteristics of the wave analyzer, or tuned voltmeter, are its frequency range, sensitivity, amplitude range and bandwidth or selectivity. Since this device consists essentially of a bandpass filter whose center frequency can be varied continuously over the frequency range and a voltmeter which measures every component of a complex wave, limitations of voltmeters affect the ultimate usefulness of the wave analyzer. Design emphasis is on making tuning easier and on stabilizing the tuning adjustment.

Noise-figure measurement is taking on increasing significance in testing vacuum tubes. Trend is also towards evaluating semiconductors on dynamic rather than static parameters

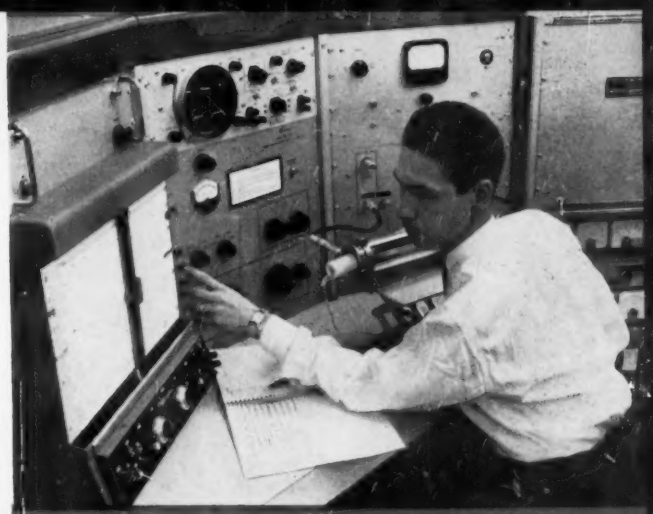

Operator checks out traveling-wave tube using automatic production tester built by Sperry Microwave Electronics

Tube and Semiconductor Testing

GO, NO-GO MEASUREMENTS using the ordinary vacuum-tube tester are satisfactory for many routine purposes, as are those of its transistor-testing counterpart. For more precise measurements, a vacuum-tube bridge-type tester is used by many vacuum-tube manufacturers. This bridge technique of measuring tube characteristics can also be used to measure transistor parameters, but most of the important parameters are more accurately measured on a transfer-function and impedance/admittance type bridge.

TUBE TESTERS—Trend is toward use of noise figure test sets for the standardization of noise measurements among the various receiving tube manufacturers. These test sets probably will be adopted ultimately as standard for measurement of noise produced by receiving and special purpose tubes at 200 mc.

A tester designed to check S-band and X-band traveling-wave tubes automatically on a production line basis has recently been announced. The instrument permits a technician to make all measurements necessary to determine if the tube meets production specifications. A permanent record of all measurements can be made and a self-calibrating feature is included in the instrument. Traveling wave tube parameters measured are power gain, power output, vswr and stability.

SEMICONDUCTOR TESTERS—Manufacturers of this equipment are struggling to keep up with the variety of new semiconductor devices being produced and with the almost daily change in type and accuracies of measurements required. Object is to show

Engineer makes voltage check on Ford Instrument's automatic analyzer used to test transistors and print out results

High-frequency transistor parameters are measured using Wayne Kerr r-f bridge

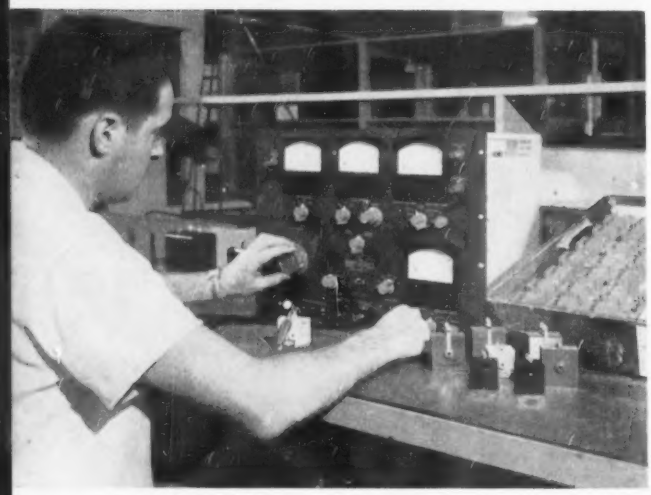

Technician checks silicon diodes on General Radio semiconductor tester

a measured parameter without using external instruments, switching in and out of other apparatus, or computation.

Techniques have been devised for obtaining readings on an instantaneous basis by pushing a button or throwing a switch once the bias values corresponding to the measurement desired have been set in.

A trend in semiconductor testing is to measure dynamic rather than static parameters. Conventional techniques measure the d-c ratios of transistors or, in the few cases where a-c measurements are made, the a-c ratios are taken at a single test frequency.

At least one available tester permits semiconductor measurements to be made over a band of frequencies and presents the summation of all the a-c ratios directly on a meter scale. This method of measurement accurately delineates the transistor characteristics and shows up any points within the amplification band which might be missed by more conventional testing methods.

Radio-frequency voltmeters have been used extensively by producers of transistors for low-level testing. Advantage of this measurement technique is the high sensitivity over a wide frequency range. Capacitance bridges are being used for measuring capacitance of diodes under different bias conditions. This approach is particularly useful in testing voltage-variable diodes.

Most of the parameter testing in the transistor field has been in the low or intermediate frequency ranges. With the rapid increase in the frequency bands over which transistors can operate, it has been necessary to expand measuring ranges into the video frequency range. It is expected that a further extension into still higher frequency ranges will be required. Requests have already been made for transistor testers capable of measuring in the microwave region.

The packaging trend for these testers is toward compact desk or bench mounting with controls and meters arranged in a logical manner. Also, sloping front panels giving maximum visibility of presentation are popular.

As in tube testing, the best method of testing a semiconductor is to test it in the type of circuit in which it will be used. For example, it is most useful to test transistor performance at the end points, or tolerance limits, of their operating voltages and currents.

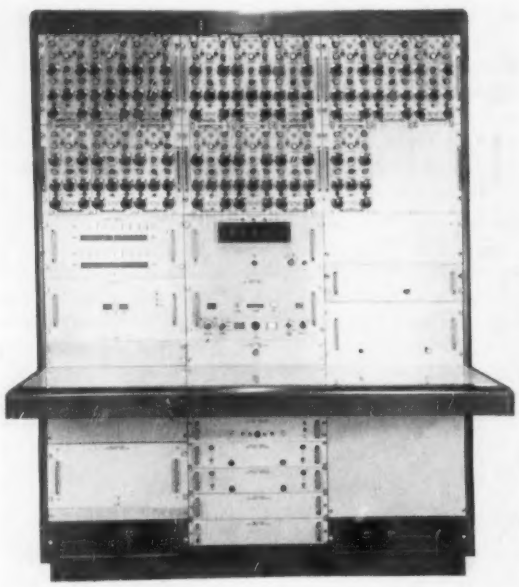

Sequential mechanism for automatic recording and testing has been designed by Texas Instruments for incoming inspection of transistors by volume users

Many things difficult to design prove easy to performance....

Limit-type go, no-go production testers using meter relays or precision comparators are now widely used. Systems testers are still largely custom-made by user

Automatic Testing

DECISIONS formerly made by human operators are now being made in many cases by automatic test equipment. In addition to relieving man of this often times routine and arduous chore, integrated instrument systems are usually able to perform the function faster, more accurately and with a flexibility denied ordinary mortals. This section dwells on the instrument complexes used for lot-acceptance or system testing.

QUANTITY TESTING—A growing trend in production testing is to make more and more measurements automatically. This testing philosophy is applied particularly in current and voltage measurements, and in tube and transistor testing. These items involve relatively simple measurements which must be made a large number of times on a repetitive basis.

Go, no-go testing of devices judged on current and voltage parameters is already accepted on many production lines. Tubes and semiconductors, when produced in quantity or undergoing purchase inspections, are also ideally suited to automatic testing procedures.

Evidence of increasing automatizing is shown by the large number of meter relays presently being sold. The relays are substituted for the indicating meters in instruments and are used to actuate various types of selection or rejection mechanisms. By adjustment of relay sensitivity, end point tolerances

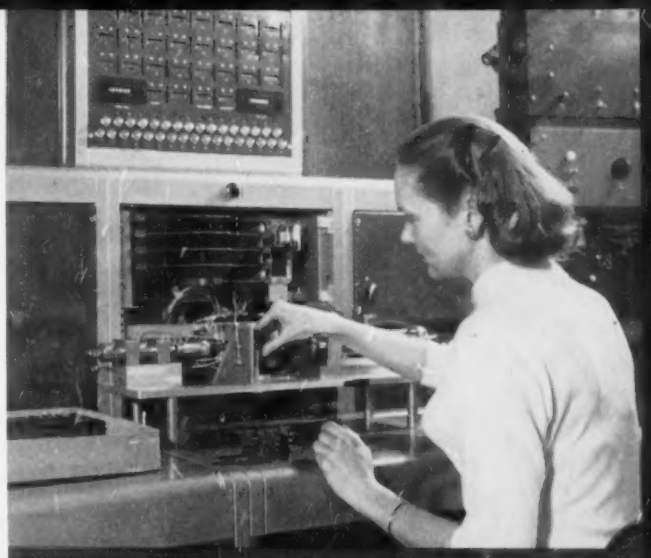

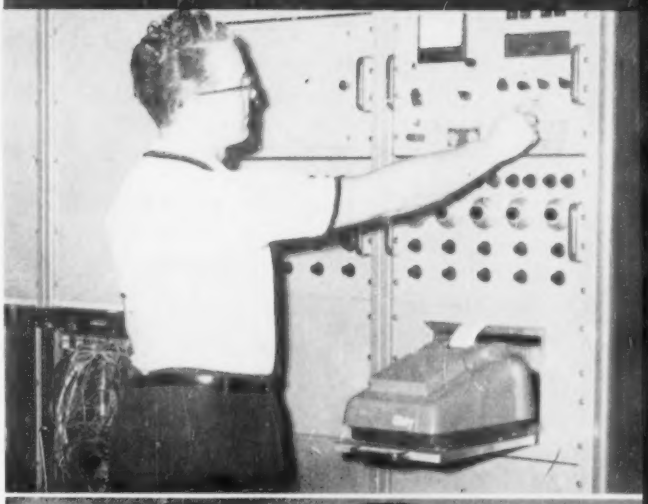

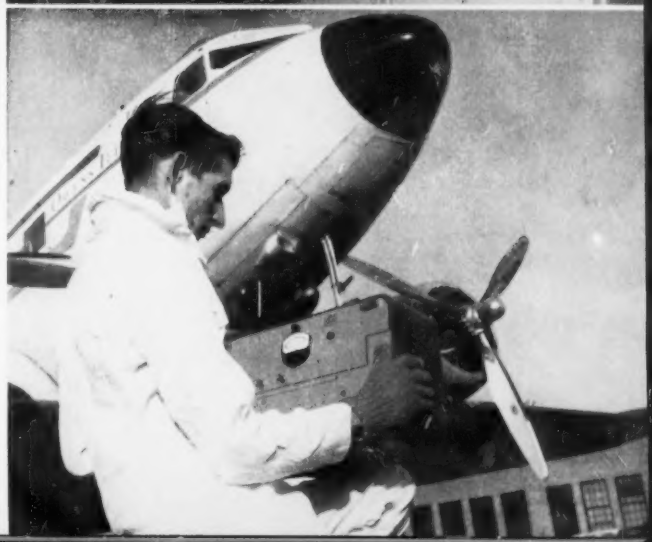

Production checkout of cables at GE's Light Military Electronics Department is done with Consolidated Avionics automatic multiple circuit analyzer in center photo

Checking operational status of airborne radar immediately before takeoff with go, no-go pushbutton tester built by Sperry Microwave Electronics

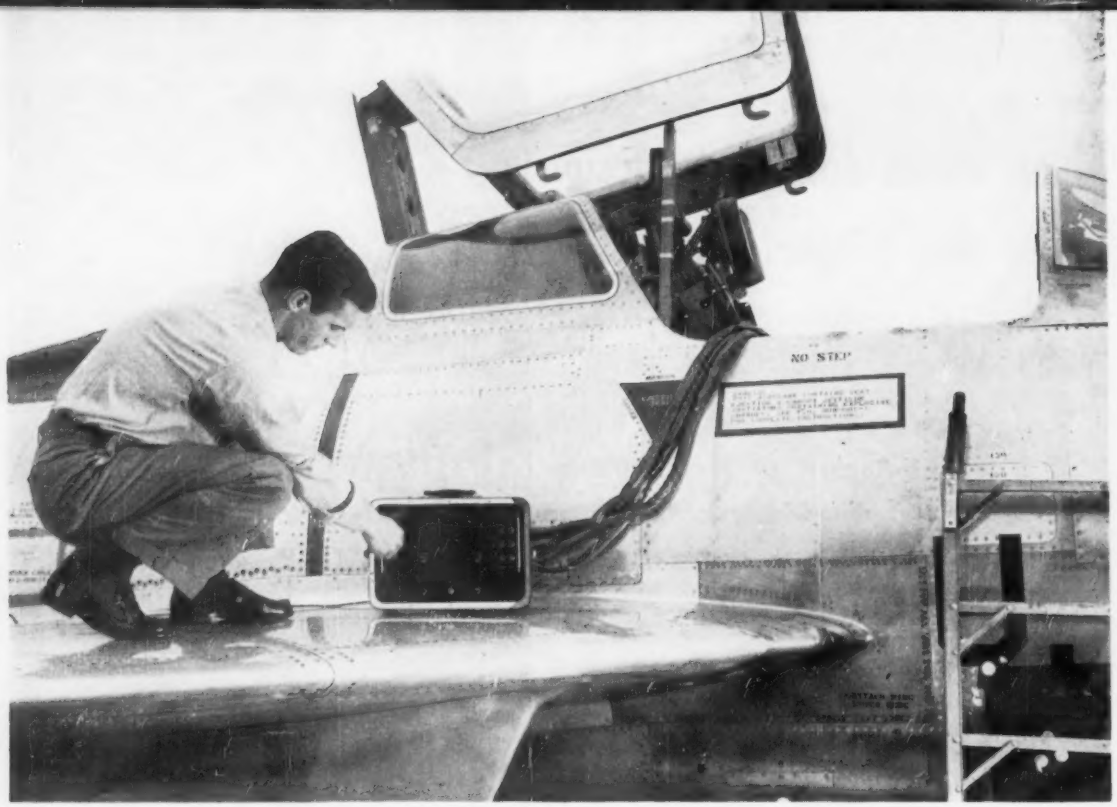

Checking cabling in Republic Aviation aircraft using portable circuit analyzer

can be preset. Devices such as resistance bridges have been designed to function in this manner. Precision comparators are coming into wide use in go, no-go testing because of their great reliability and high sensitivity.

Automatic component testers are particularly advantageous for manufacturers receiving small quantities of a variety of types of electronic components. These test instruments usually are programmed for testing any of the common components by inserting a punched card into the instrument. Obviously, such an instrument usually contains more facility than normally required by component manufacturers who are interested in large volume testing of a single component type. Commercial circuit testers must provide test-setup flexibility at reasonable cost.

Instrument complex used to check out telemetering package of Polaris test vehicles at Lockheed's Missiles and Space Division

Satisfying the needs of a wide variety of customers without making the purchase price prohibitive for most seems to be the biggest problem faced by circuit and component tester manufacturers. Requests for unusual measurements or extended ranges must often be ignored for the sake of practicality and economy. Provisions are being made in automatic testing instruments for use of auxiliary apparatus such as oscilloscopes and oscillators by customers with specialized requirements.

SYSTEMS TESTING — Much of the automatic equipment designed to test complex electronic systems is custom-built by the systems manufacturers themselves. Usually this procedure involves purchasing a variety of commercial instruments and incorporating them into a tester containing special test sequence control units or programmers. Some testers are available commercially for checking out radar systems and cabling.

The author wishes to acknowledge the assistance of the many individuals who helped make this report possible.

CIRCLE NO. 105 READER SERVICE CARD→

ACTUAL SIZE

50 G'S VIBRATION—
250 G'S SHOCK

THE FIRST PREMIUM QUALITY MICRO-MINIATURE RELAY

FILTORS' NEW GOLDEN G

Filtors' Golden G is the only relay that will meet 50 G vibration to 3,000 CPS and 250 G shock.

Each Premium Quality Golden G – precision made to provide the finest overall performance characteristics of any relay available – is expertly tested by Filtors Reliability Test Center to the most exacting standards in use in the industry.

The exclusive new "Sensi-Tork" rotary relay motor makes the Golden G unmatched for ruggedness and efficiency. Filtors' newly developed RELAY MOTOR ANALYZER, which can continuously measure magnetic fields, force, armature travel and flux density, was used to plot the actual curves of Torque vs. Input Power, illustrating the great superiority of the Golden G vs. micro-miniature relays from other leading manufacturers.

For more details and specifications of the Premium Quality Golden G call your Filtors representative or write:



Leading manufacturer of hermetically sealed rotary sub- and micro-miniature relays.

FILTORS, INC.

Main office and plant: Port Washington, N. Y. POrt Washington 7-8220
West coast office: 13273 Ventura Blvd., Studio City, Calif. STanley 3-2770

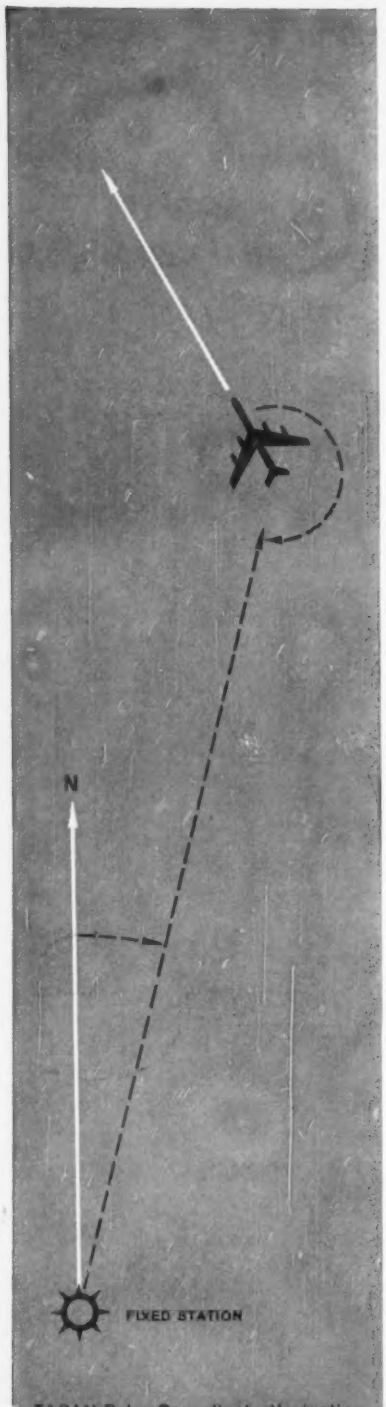

TACAN Polar Co-ordinate Navigation

MYCALEX® 410 glass-bonded mica

the world's most nearly perfect precision-molded electronic insulation

"gives high impact strength . . . superior insulating value," in ITT's TACAN beacon

Latest achievement in air navigation and traffic control is TACAN, an advanced radio air navigation system developed by ITT LABORATORIES, DIVISION OF INTERNATIONAL TELEPHONE AND TELEGRAPH CORPORATION, for the U. S. Navy and Air Force.

Prominently featured in the 12 KV discharge switch of TACAN's ground beacon transmitter is MYCALEX 410 glass-bonded mica insulation. Here and in other applications, this precision-molded insulation shows exceptional mechanical strength and superior electrical resistance. It will withstand operating temperatures to +600°F . . . and has *total dimensional stability!*

Why was MYCALEX designed into this item? Says ITT: "*MYCALEX was selected because of its high impact strength and excellent insulating properties, which we found to be as good as or better than grade L-4B in ceramic. In addition, the good molding properties of MYCALEX made it possible to design the insulator with convolutions which increased the creepage path to ground.*"

MYCALEX 410 is one of a wide variety of glass-bonded mica and ceramoplastic insulation materials created and perfected by MYCALEX CORPORATION OF AMERICA. Whatever insulation characteristics you require, there is a MYCALEX material to meet your need. For example, SUPRAMICA® 560 precision-molded ceramoplastic offers a maximum operating temperature of +932°F . . . and SUPRAMICA 620 machinable ceramoplastic offers a maximum operating temperature of +1550°F. Write today for specifics.

General Offices and Plant: 120-G Clifton Blvd., Clifton, N. J.
Executive Offices: 30 Rockefeller Plaza, New York 20, N. Y.

SYNTHAMICA® SUPRAMICA® MYCALEX®

MYCALEX
CORPORATION OF AMERICA

WORLD'S LARGEST MANUFACTURER OF GLASS-BONDED MICA AND CERAMOPLASTIC PRODUCTS

"See Our Newest Products, Booth 836, Instrument-Automation Show, Sept. 21-25."

Just a wavelength from ANYWHERE . . . via **AIRCOM**

Why Philco has been selected to modernize the world's largest communications system

AIRCOM is the vast, global network of electronic communications that links every base, outpost and aircraft of the U. S. Air Force. It is the world's most extensive integrated communications system.

Recently awarded the contract to modernize and expand AIRCOM, Philco was selected by the Air Force for its proven ability in systems management and its extensive experience in global communications.

The modernized AIRCOM System will utilize advanced techniques in both point-to-point and air-to-ground communications. It will provide greater traffic capacity, maximum reliability and complete compatibility of all USAF communications equipment.

In the world of advanced electronics . . . in communications, data processing, missiles, satellites, weapons systems and radar . . . look ahead and you'll choose Philco.

PHILCO®

GOVERNMENT & INDUSTRIAL DIVISION

4700 WISSAHICKON AVE., PHILADELPHIA 44, PENNA.

NEW FROM PHILCO

HIGH FREQUENCY NPN SILICON DIFFUSED-BASE TRANSISTORS*

30mc PULSE RATE SWITCHES

60mc AMPLIFIERS

Type Number	h_{fe}	Typical Power Gain	Typical Switching Times (Saturated Test Circuits)
2N1199	12-60 (DC)		t_r 35 mμsec t_s 10 mμsec t_f 25 mμsec
2N1267	6-18	25 db at 4.3 mc	
2N1268	11-36		
2N1269	28-90		
2N1270	6-18	25 db at 12.5 mc	
2N1271	11-36		
2N1272	28-90		

Maximum V_{cb}—20 V
Maximum temperature—150° C
Maximum dissipation—100 MW

2N1199

This high speed switch has exceptionally low saturation voltage (typically 0.125 V), permitting *practical* design of 5 mc pulse circuits, using conventional saturated switching configurations. 30 mc pulse rates are obtainable in *practical* circuits using non-saturating techniques.

2N1267-68-69

The high gain characteristics of these units make possible the design of high efficiency IF amplifier circuits for communications equipment. These devices have unusually low collector capacitance . . . typically 1.5 $\mu\mu$f . . . and are available with restricted beta ranges to simplify design problems.

2N1270-71-72

The excellent high frequency response of these transistors makes practical the design of high performance communications systems at frequencies up to 60 mc. They have the same low collector capacitance and are available with restricted beta ranges.

Immediately available for prototype design from your Philco Industrial Semiconductor Distributor.

Write Dept. E-759, Lansdale Tube Company, Division of Philco Corporation, Lansdale, Pa.

**SADT . . . Trademark Philco Corp. for Surface Alloy Diffused-base Transistor.*

PHILCO

LANSDALE TUBE COMPANY DIVISION

LANSDALE, PENNSYLVANIA

TRANSISTOR CENTER U.S.A.

electronics
SEPTEMBER 11, 1959

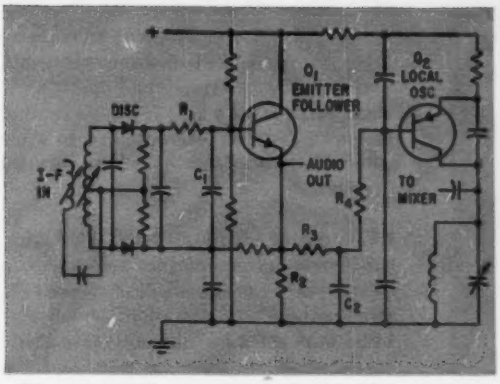

FIG. 1. Controlled oscillator current afc used in 15-transistor radio

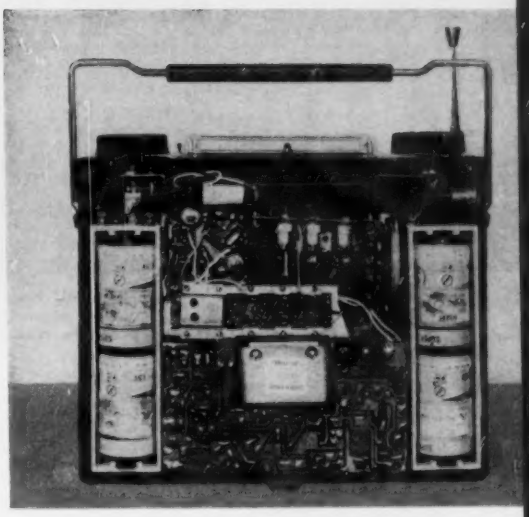

FIG. 2. Rear view of 15-transistor radio showing use of printed boards

Survey of Japanese Electronic Devices

Besides run-of-the-mill transistor radios, Japanese engineers are coming up with novel ideas. A talking book, a pair of a-m/f-m portables, a half-dollar sized rechargeable cell and industrial-scientific devices are some of the items

By **LESLIE SOLOMON**, Associate Editor

SINCE ENTERING the transistorized radio field (ELECTRONICS, July, 1956), and having found it profitable (ELECTRONICS, June 26, 1959), Japanese electronics manufacturers are venturing deeper into the market. Several new devices are to be offered in the near future.

A-M/F-M PORTABLES—One development is the Sony model TFM-151 transistorized a-m/f-m portable. This set uses 15 transistors, 4 germanium diodes and one varistor. The receiver is divided into three basic sections: f-m detection, a-m detection and audio amplification.

The f-m portion uses 8 transistors and two diodes. These are used as r-f amplifier, mixer, local oscillator, four stages of i-f, discriminator (two diodes) and emitter follower. The controlled-oscillator current automatic-frequency-control circuit is shown in Fig. 1. The 10.7 mc i-f signal is detected by a conventional discriminator and the output passed through de-emphasis network R_1 and C_1 to emitter follower Q_1. The audio output and afc are taken from emitter load R_2. The afc voltage is derived from averaging circuit R_3 and C_2 then applied through R_4 to the base of local oscillator Q_2. There are no provisions for disabling the afc.

The a-m portion uses 3 transistors and two diodes. The circuit consists of a conventional converter and

FIG. 3. Talking book is supported on shelf. Page being read is under plastic pressure plate. Book in picture has fold-out pages. Dark surface, left, is magnetic-film coating

two i-f stages. One diode is used as the second detector and the other is used in a shunted-diode agc circuit. The output of either the f-m or a-m portions is chosen by a switch.

Four transistors terminating in a push-pull output stage are used in the common audio section. It produces approximately 180 mw output power. Figure 2 shows the rear of the set and Table I lists the characteristics.

Another a-m/f-m model by the same manufacturer is the TFM-121. This 12 transistor set is smaller and lighter than its predecessor. At the time of writing, schematics were not available. This model is provided with a multiplex output jack and has an extension dipole within its carrying handle.

TALKING BOOK—One Japanese innovation is the talking book or Synchroreader shown in Fig. 3. The recording media for this device is a thin coating of magnetic film (similar to conventional tapes) applied to one side of a sheet of paper. The recorded message may then be illustrated on the opposite or viewing side. Up to ten-minutes playing time is available and provisions are made to enable playback to start at any point on the sheet. The machine can also make recordings.

The basic mechanical operation of the talking book is shown in Fig. 6. The paper to be recorded is placed on the machine, magnetic film down, and held in place with a clear plastic pressure plate. The turntable mounts three equally-spaced parallel-connected magnetic recording/playback heads. In operation, the turntable rotates so that the three heads sequentially sweep the magnetic film. The sweep is moved down the paper by a feedscrew driven by the turntable motor. A separate high-speed motor is provided for fast turntable return.

A built-in microphone and amplifier produce the currents required for the three heads during recording. For playback, the three heads operate in the same mechanical way as when recording and the same amplifier is used. While either recording or listening, the viewing side of the paper is motionless. As shown in Fig. 3, the recorded sheets may be bound book style.

To prevent accidental erasure of prerecorded sheets, punched-coded holes on the sheets will automatically open the erase circuit. Among the auxiliary components used with the device is a magnetic sound printer that can make up to 15 copies simultaneously from one prerecorded sheet and a quantity of thin magnetic film that may be applied to the back of any sheet of paper to make it usable by the machine. The magnetic film has been applied to a newspaper sheet which was then run through conventional printing presses.

RECHARGEABLE CELLS—To supply power to transistor radios or other low-power devices, a miniature rechargeable cell has been developed. This alkaline cell is enclosed in an air-tight metal case whose size ranges from approximately ½-in. to 2-in. in diameter and between ¼-in. and ½-in. thick. The cells deliver between 3 and 1,000 milliampere hours at 1.25 v.

To recharge the cells, a small plastic-cased plug-in charger is used. The charger can hold a pair of cells and plugs directly into a wall socket. A neon-lamp indicator glows when the charger is in operation. Approximately 8 hours is required to charge the cells.

TRANSISTORIZED TV SETS—Two working experimental models of transistorized tv sets have been developed. The Toshiba set uses a 70-degree 14-in. cathode ray tube, 34 transistors and 12 diodes. The set is 11-in. high, 17-in. long, 15-in. wide and weighs about 40 lb. This developmental model uses external rechargeable batteries. The crt uses 11 kv generated by a vacuum tube circuit and total power consumption is 30 watts. Figure 5 shows one experimental model using an 8-in. crt.

The Hitachi set uses a 90-degree 14-in. crt, 32 transistors and 3 diodes. The set is 13-in. high, 15-in. long, 15-in. wide and weighs 40 lb including rechargeable batteries.

There are still several problems to be solved in transistor tv. What is needed includes: new type crt to fully exploit the advantages of transistor compact-

Table I—Fifteen-Transistor Radio Characteristics

	A-M	F-M
Frequency range	535–1,605 kc	88–108 mc
Intermediate frequency	455 kc	10.7 mc
Sensitivity	approx 70 μv	approx 20 μv
Selectivity	20 db (10 kc off)	3 db (150 kc off)
Antenna	built-in ferrite bar	rod antenna (75 ohms)
Output power	180 mw (max)	
Dimensions	3 × 8¼ × 9 in.)	
Weight	5.5 lb	

FIG. 4—(Left) Transistorized a-m/f-m portable showing extension antenna mounted in handle



FIG. 5. (Right) Experimental model of transistorized tv set using an 8-in crt



ness; more compact and efficient batteries; and lower priced transistors.

OTHER EQUIPMENT — A number of Japanese manufacturers are now making industrial and scientific devices of excellent quality and performance.

A portable industrial 15-mev betatron having a ray focus of 0.1 x 0.1 mm making it useful for magnified radiographs.

A newly developed photoelectric colorimeter allows accurate and direct reading of required value of x, y, (chromaticity coordinates) and Y (luminance) by control of a photovoltaic cell. The colorimeter uses 3 filters instead of the 4 usually used to satisfy Luther conditions. The device is equipped with a luminance fluctuation compensator so that the chromaticity coordinates of flickering light can be directly measured.

A hand-foot radiation monitor incorporates alpha, beta and gamma detectors; also has an extension detector for checking clothes. The detector takes 10 seconds to operate and indicates the presence of contamination by indicator lamps.

Transistorized remote control and measuring equipment has selection signals binary coded with a parity check bit. The received code is sent back to be compared with the original code. Both selection and operation codes are frequency-shift modulated and transmitted over a control cable. The maximum number of controlled machines is 100. Measuring equipment is housed in an unmanned station and transmits information by vhf to the recorder station. One recorder station handles 10 unmanned stations. The recording stations report to the main station.

A three-axis numerically controlled milling machine has its axes controlled by a digital servo at a speed of 0-5.12 mm/sec. The tolerance is less than 0.05 mm at a speed of 3 mm/sec. The playback speed is 10 mm/sec.

An automatic curve tracer features a photodiode and transistorized head. The unit analyzes pulses in two axes. With ±0.05 mm to tolerance, the machine can trace a diagram as large as 1,600 x 1,250 mm at speeds up to 5 mm/sec and can enlarge up to 10 times the original diagram size.

A transistorized carrier telephone system provides 12 telephone channels over foamed polyethylene or paper-insulated cables on a two-wire basis. The unit uses frequencies from 6 to 54 kc in one direction and 60 to 108 kc in the other direction.

A multiplex communication system operating at

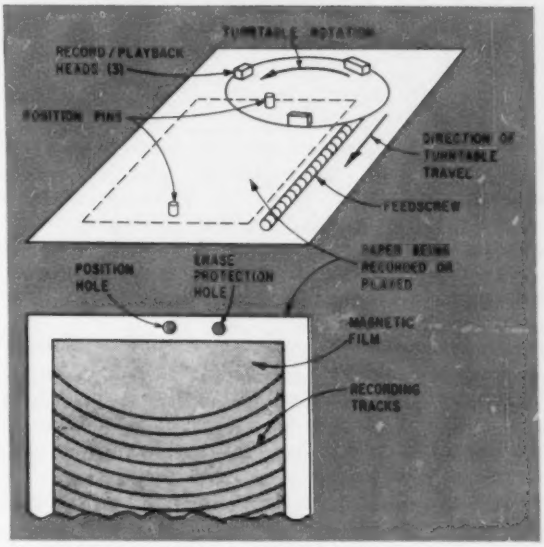

FIG. 6. Mechanical details of the talking book

14,000 mc is completely transistorized except for the klystron. The system can handle 6 single-sideband or 4 double-sideband channels. Provisions are made to expand the system so that it can accept up to 12 single-sideband channels.

SPECIAL-PURPOSE TUBES — The Japanese are also active in the special-tube field. One company makes heavy-duty rectifiers that have outputs up to 15 amperes at voltages of 200 v, counting tubes with speeds of 20 kc, current regulators that regulate up to 1.75 amperes and mercury-pool rectifiers with up to 100 amperes output at 250 v.

Many other special-purpose-tube types such as Geiger-Muller counters, multiplier phototubes, single- and double-beam cathode ray tubes, camera and monoscope tubes are also being developed and manufactured.

Another company is concentrating on the design and manufacture of microwave tubes. Such tubes as glass-to-metal and ceramic-to-metal disk-seal triodes delivering 15 w at 2,500 mc, reflex klystrons with output up to 500 mw at frequencies ranging to 7,060 mc, traveling-wave tubes operating at 10.7 and 11.7 kmc having a small signal gain of 30 db with an output of 0.7 w.

Increasing Counting

Use of transistors in this glow-tube counter results in a cost reduction of one-half and an increase in reliability. Units can be cascaded to read as high as 10^5 and are used in nuclear instrumentation

By **HENRY A. KAMPF,** Consulting Engineer, Packard Instrument Co., Inc., La Grange, Illinois

USING A COMBINATION of transistors and glow-transfer counting tubes results in an inexpensive approach to reliability for counting systems. The absence of vacuum tubes and the use of transistors that are either cut off or saturated results in a nearly ideal counter which is unaffected by power supply variations as large as 20 percent and temperatures as high as 60 C. A single low-speed decade complete with decimal readout can be produced at less than one-half the cost of conventional decimal counting units.

Glow-transfer counting tubes perform the function of counting and simultaneously provide visual readout by the position of the glow of the tube. Each glow tube requires two negative pulses to advance the glow from one cathode to the next. One of these pulses is fed to the first guide which advances the glow one-third of the way. The second pulse is fed to the second guide which advances the glow the second one-third of the distance from cathode to cathode. The glow finally advances the last one-third of the distance as the pulse driving the second guide falls to zero.[1, 2]

Pulse Timing

The negative pulses driving the guides are timed so that the second-guide pulse is nearly at full amplitude before the pulse at the first guide begins to fall as shown in Fig. 1A. Pulse amplitudes of at least 80 v are required to drive the tubes reliably.

Larger pulses produce faster glow transfer, giving faster counting rates. However, 80 v pulses will drive a GC10B glow tube at a rate of 1000 counts per second.

The pulse width also affects the counting rate. It is not possible to start glow transfer before the glow is resting on a cathode, and a finite time is required to transfer the glow from cathode to guide to guide to cathode; therefore a minimum period exists below which input pulses will not be resolved. Driving pulse width T_1 at one-half amplitude must not be wider than about 80 percent of T to allow for adequate glow-transfer time.

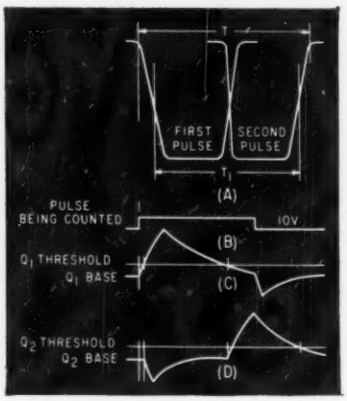

FIG. 1—Waveshape of pulses at the guides (A), input (B), transistor Q_1 (C) and transistor Q_2 (D) are shown

The circuit shown in Fig. 2 is a simple reliable circuit capable of 1-kc operation. It provides driving pulses of about 100 v. Since this driving-pulse amplitude is smaller than that usually used with the glow-transfer tube, it is necessary to make the output pulse widths wider than just described in order to accommodate the slower glow-transfer times. This circuit is essentially two amplifiers in cascade; both are saturated when no signals are present.

Circuit Operation

The positive input pulse is differentiated by the coupling capaci-

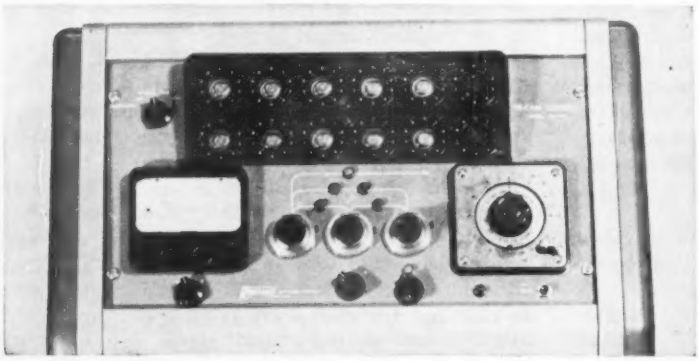

Reliable counter uses glow tubes and transistors

System Reliability

tor C_1 and R_1, the input resistor of transistor Q_1. The portion of this differentiated pulse that exceeds the cut-off threshold of Q_1, produces a large negative pulse at the collector of Q_1 as it is cut off. This pulse is fed to the first guide of the glow tube and also fed to transistor Q_2 to develop the second pulse. The pulse is differentiated by capacitor C_2 and R_2, the input resistor of Q_2.

Negative excursion of the signal at the base of Q_2 has no effect since Q_2 is already saturated. However, the positive part of this signal which exceeds the cut-off threshold of Q_2 causes the pulse output that is used to drive the second guide.

The time constant at the base of Q_1 controls the pulse width of the first pulse and the delay time of the second pulse. The time constant at the base of Q_2 controls the pulse width of the second pulse.

These 1-kc circuits are cascaded by connecting the input of one to the output of another. Registers as high as 10^5 have been obtained by using this method.

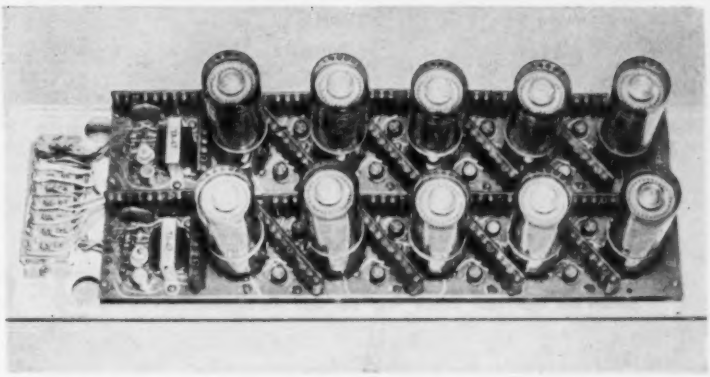

Printed circuit layout of 1-kc and 4-kc scaler aids in assembly and packaging

4-Kc Scaler

The circuit shown in Fig. 3 drives the glow tube at its maximum possible rate. It uses a single-shot multivibrator and step-up transformer T_1 to obtain the 300 v pulses necessary to drive the tube at its maximum rate of 4-kc. In this circuit the single driving pulse is fed to both guides at the same time.

The pulse arrives at the first guide after passing through differentiating network R_1 and C_1 while the pulse arriving at the second guide charges up capacitor C_2 of the pulse-stretching network. Therefore, as the pulse at the first guide is decaying the second guide-pulse voltage is still at a high value, and the glow is transferred as previously described.

The main-driving pulse width is determined by the multivibrator time constant and the pulse amplitude is determined by the loading on the step-up transformer. Pulse amplitudes as large as 300 v are obtained and, with a half-amplitude width of only 60 microseconds, are capable of driving the glow tube at a 4-kc rate. Some of the GC10B tubes have counted as fast as 6 kc with this circuit.

These circuits are quite tolerant of component variations in production and are used in the counting system of liquid scintillation spectrometers and other nuclear instrumentation.

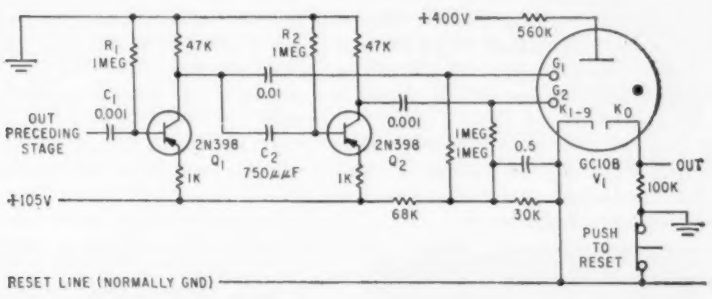

FIG. 2—Circuit for 1-kc scaler uses 5-percent tolerance resistors and 10-percent tolerance capacitors

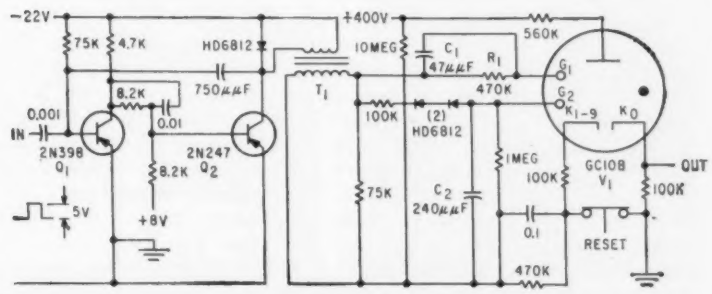

FIG. 3—All capacitors and resistors of 4-kc scaler have tolerance of 5-percent

References

(1) J. H. L. McAsulan and K. J. Brimley, Polycathode Counter Tube Application, Electronics, p 138, Nov. 1953.

(2) R. C. Bacon and J. R. Pollard, The Dekatron, *Electronic Engineering*, p 173, May 1950.

By EDWARD B. MURPHY,
Staff Member, MIT, Lincoln Laboratory, Lexington, Mass.

FIG. 1—Electroforming of transition piece eliminates problems of machining and assembling

Electroforming of Intricate

Because electroforming permits intricate and complex shapes to be produced accurately and economically, it provides a valuable tool for the engineer concerned with the design, development and production of quality components

ELECTRONICS ENGINEERS working on microwave transmission systems often require a knowledge of production techniques to design equipment properly. Electroforming, a refinement of electroplating, has found extensive application in the manufacture of microwave hardware.[1] Its applications are limited only by its users.

Electroforming is a process by which metal parts can be made accurately by electrochemical deposition of metal onto a mandrel or into a mold. Parts that are impossible or costly to make by standard machine shop practices can frequently be produced economically by electroforming methods. This plating technique provides close control of tolerances of intricate shapes and produces smooth interior finishes of high quality.

Electroforming Process

There are four basic steps in the electroforming process: preparation of electroplating bath, preparation of the mandrel and its placement in the electrochemical bath, metal build-up and removal of the component from mandrel or mold without damage to the shell of deposited metal.

The preparation of the electroplating bath follows usual procedures in electrochemistry. The nature of the bath depends upon the metal to be deposited.

Mandrels or molds are made of stainless steel, aluminum, plastic and other materials. The manner in which mandrels are treated for the electroforming process depends upon the material of which they are made. Details of a reliable procedure for treating plastic mandrels are given in the box.

After treatment, the mandrel is placed in the electroplating bath as the cathode and receives positive metal ions from the electrolyte. The applied voltage is usually from 1 to 3 v d-c and, in general, current densities of 40 amp per sq ft of plating area are used.

For a given current density, the thickness of the deposited metal is a function of plating time. As long as the current flows in the same direction and the mandrel is the cathode, thickness of plated metal is directly proportional to plating time. This linear relation does not apply if the direction of current is periodically reversed. Periodic reversal of current improves the smoothness of deposit and surface finish. With periodic current reversal and current densities of 40 amp per sq ft, metal deposition rate is about 0.0015 in. per hr. When the deposited metal has been built up to the desired thickness (preferably 0.040 in. or more) the mandrel and plated shell are removed from the electroplating bath.

Finally, the electroform is removed from the mandrel. A plastic mandrel shrinks upon cooling and can be removed from the electroform by subjecting both to a decrease in temperature. Aluminum mandrels are removed from copper electroforms by dissolving or etching the aluminum with solutions that do not attack copper. Stainless steel mandrels may be pushed away from the electroform at ambient temperatures, or rapid heating, making use of the differential thermal conductivity between steel and copper, can be used.

Mandrels

Stainless steel mandrels are used for electroforms that can be separated physically. In other words, the mandrel should not have any negative or reverse drafts. A stainless steel mandrel is quite durable and can be used repeatedly. Accidental nicks and scratches are the usual reasons for retiring a stainless steel mandrel.

If the mandrel is of such complex geometry that it cannot be separated, it must be dissolved. Alumi-



FIG. 2—Waveguide is built using a combination of electroforming and machining techniques



FIG. 3—Four-cavity waveguide transition uses aluminum mandrel which is dissolved out



FIG. 4—Plastic mandrel for guide is chemically silvered using process outlined in box on next page

Electronic Components

num mandrels etch-out readily in sodium hydroxide (lye or caustic soda). Considering machining tolerances, aluminum mandrels are excellent but unfortunately can be used only once.

When using aluminum, there is a slight sacrifice of finish as compared to an equally finished stainless steel product because of the zincate step in the aluminum mandrel processing. The zincate coating leaves a matte finish compared to a mirror-like result from the direct copper plating on the equally finished stainless steel mandrel. In practically all radar plumbing applications this difference is of no significance.

As has been indicated stainless steel and aluminum mandrels are sufficiently versatile to perform almost all standard electroform requirements. However, a plastic mandrel can be effectively utilized when one-shot job with tolerances of ± 0.003 in. or looser is involved. Plastics are subject to cold-flow internal stresses and exhibit some dimensional hystereses on cooling, thereby limiting their reuse because of dimensional changes.

Plastic mandrels are also useful when economy and ease of machining are paramount and where the bulk of the mandrel introduces a size and weight problem.

An example of a precision part produced on a stainless steel mandrel is the h-f transition piece shown in Fig 1. The finished inner dimensions of the guide measure 0.074×0.080 in. at one end with a one-inch taper section to 0.034×0.020 in. A tolerance better than $\pm$ 0.5 mil is held throughout. The fixture end of the mandrel is enlarged to 0.234×0.148 in. to facilitate the removal of the jig.

Figure 2 shows another waveguide built up on a stainless steel mandrel. The orientation of the waveguide and mandrel are inverted to show the intricacies of the transition more clearly. Feathering of the brass inserts can be noted from the mandrel groove pattern. The flanges are soldered in place but the brass inserts are fastened by electroplating. This is accomplished by holding the four brass inserts closely to the stainless steel mandrel until a 5 to 6 mil thickness of metal is deposited. Then the clamps are removed and the electroforming continued. No machining is done on the body proper, which is over $\frac{1}{4}$ in. thick.

The slotted four-cavity waveguide transition shown in Fig. 3 is made by sandwiching four aluminum plates with three brass separators. The assembly is bolted together beyond the usable waveguide portion. The mandrel is machined and the bolt area stopped off. After electroforming with copper, the aluminum is dissolved out with caustic soda. Soldering and annoying solder residues are eliminated by using this approach. Tolerances are easily maintained and alignment of plates is not a problem.

A dimensionally stable and easily machined plastic is Rexolite, a styrene copolymer. A Rexolite step mandrel and electroformed guide are shown in Fig. 4. The center cut-

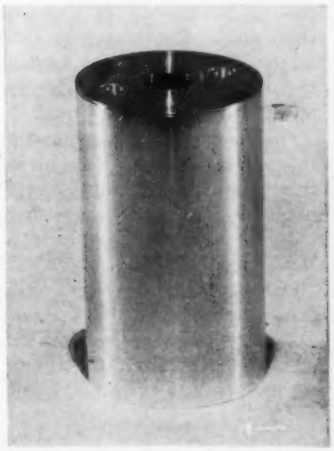

FIG. 5—Lead is used as inside lining of this radar-frequency tuner

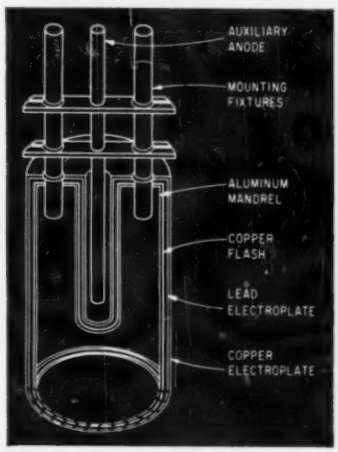

FIG. 6—Cross-section of tuner shows method of obtaining lead lining

out is electroformed in place. This is done by placing an unmetallized plastic spacer on the chemically silvered mandrel.

The mandrel for making a radar-frequency tuner in which no foreign metal is present other than lead as an inside lining is shown in Fig. 5. This mandrel is made by press fitting various aluminum parts into the assembly shown.

A series of metal deposits are made as indicated in Fig. 6. After electrodeposition, the mounting fixtures and auxiliary anode are removed and the holes enlarged. The bottom of the inside tube is opened, permitting easy solution etching of the aluminum mandrel. Copper flash coating over the aluminum is removed with a sulphuric-chromic acid solution and lead chromates that form on the lead are removed by a chelating cleaner. Figure 7 shows the resultant product after final chemical treatment but before any electrical adapters have been mounted. Preliminary tests have yielded good results.

A variation from the usual electroforming is the making of maser traveling waveguides. These components are electroplated with the mandrel becoming an integral part of the guide. Since they operate at liquid-helium temperatures, it is desirable to limit the copper wall thickness to a minimum because of the different coefficients of expansion of the materials involved. A prototype with a wall thickness of 10-15 mils has been made.

The guides are usually filled with crystalline-like materials that have been precision cut at particular orientations. One section of the guide may require a different dielectric than the other for matching electromagnetic field requirements. The alignment jig and dielectric crystal mandrel are shown in Fig. 8. Note the nine sections which include two triple-layer, sandwich-like sections. Eight joints must be made intact.

Initially, the exposed areas of the guide are metallized with silver by the silver mirror technique (see box). The silver is about 10 millionth inch thick. Copper electroplating deposits a strap around all the joints, and, after this 5 to 6 mil deposit, the unit is usually physically sound and may be handled with care. The maser guide is removed from the jig. The areas that were in intimate contact with the jig are remetallized with copper after a copper oxide treatment. The last innovation insures the bonding of the chemically-deposited copper to the already present copper plate[2].

Although alternative fabrication techniques are possible, they usually leave undesirable air gaps between the dielectric and the waveguide that this electroplating eliminates completely.

Mandrel Removal

One of the most fundamental requirements in electroforming is to be able to remove the mandrel from the electroform. This is not a problem with plastic mandrels because of the large difference in the expansion coefficients between plastic and copper. Separation of this composite is the easiest of the mandrels being discussed. Because the plastic has an expansion coefficient six times greater than copper, cooling in dry ice shrinks the plastic so that it practically falls out.

When dealing with stainless steel mandrels two properties should be considered. Although the coefficients of expansion of copper and stainless steel are quite similar, there is a significant difference in their heat conductivity with copper able to conduct heat about 100 times faster than steel. Therefore, on troublesome separations quick heating of the electroform will facilitate removal.

On properly treated mandrels it is rarely necessary to introduce this rapid heating step. The force necessary to remove a new mandrel is in the order of 60 psi of intimate surface contact area. Once the mandrel has been broken in the release force can be as low as 30 psi.

Tests have been run on sample guides and compressive forces recorded. It was convenient and informative to separate most of the small electroforms with the tensile jaws of the tester and record the tensile force pattern.

Treatment for Plastics

The dielectric is made conducting by using the popular silver mirror process.[6] Of the innumerable formulations available, the following has proved reliable.

1. The plastic mandrel should be capable of being wet, indicating a high degree of cleanliness.

2. Immerse the dielectric to be silvered in the sensitizer solution for one minute and follow with a thorough water rinsing (distilled or demineralized water is used in this process.

Sensitizer Solution

Stannous chloride	100 g
Hydrochloric acid	400 cc
Nonionic wetting agent	
Aerosol OS (by weight)	0.1%
Water to make 4 liters	

3. Immerse in a silvering solution made up of the following solutions:

Solution 1

Silver nitrate	100 g
Water	1,000 cc

Solution 2

Sodium hydroxide	100 g
Water	1,000 cc

Solution 3

Ammonium hydroxide	400 cc
Water	600 cc

Silvering solution

50 parts solution 2
40 parts solution 3
1,250 parts water

Reducer Solution

Cane sugar	90 g
Nitric acid	4 ml
Ethyl alcohol	175 ml
Water to make 1 liter	
Age for one week	

To the silvering solution of 2 and 3, add approximately 150 parts of solution 1. Balance solution 3 and 1 until a light brown colloidal dispersion results. Use enough solution to cover the article or mandrel to be coated, and add 1 cc of reducer solution for every 20 cc of silvering solution. It is convenient to use graduated cylinders where possible, so that the volume of solution and additions are readily discernible.

4. Silvering takes place immediately, but the process is permitted to continue for 5 minutes. There should be no skips evident. However, after an initial flash of electroplate, it is sometimes possible to touch up a skip carefully with a conducting silver paint. Resilvering without stripping is sometimes practical. Cleanliness is essential. If the plastic specimen does not water wet initially, it is a good indication that the entire silvering operation will also be unsuccessful

Some experiments have been performed to evaluate brass mandrels. It would be advantageous to substitute the more machinable brass mandrel for stainless steel.

The brass treatment procedure involves the deposition of a silver immersion film on the brass followed by the conversion of this film to silver iodide. A film of graphite is then applied. This lowers the release force from 700 psi of surface area to 300 psi when separating the electroform from the brass mandrel. Heating offers no assistance in separating. The separation force is about 5 to 10 times greater than that for stainless steel mandrels.

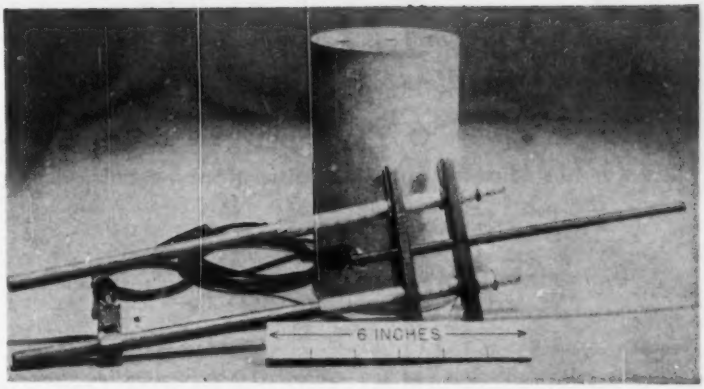

FIG. 7—Preliminary tests of tuner indicate satisfactory operation

Stress

Electrolytically deposited metal can be highly stressed both in tension and compression. Additions agents, temperature of deposition, current density, periodic reverse and solution concentration all seem to influence stress level.

Forces involved in acid copper electroplating were measured.[3] Unfortunately the results have not been sufficiently consistent to yield definite conclusions. However, if a relatively large amount of addition agent is used, large stresses can result. Actual stress cracks have occurred on certain shape objects (spheres), where the geometry would be weak under tension stresses. The remedy is to limit the amount of addition agent. There appears to be little difference in stress level between straight plating and periodic-reverse plating.

Strain experiments to correlate the data are being conducted to determine the mode of distortion that could take place in electroform sections. Additional stress measurements are planned for the above copper electrolyte. Initial results indicate that compression forces are involved when the addition agent is omitted but that periodic reversal of the current direction lessens these forces.

Periodic Reverse

Periodically reversing the direction of the electrolysis results in good leveling. Without this periodic reversal, metal deposition is usually excessively nodular and irregular at high current density points such as projections, outside corners and ridges.

The Russians have reported similar findings[4]. They report that their results indicate that the mechanism of periodic reversal is as follows: The first cathode impulse deposits copper crystals of a definite orientation controlled by the mandrel surface. The anode film impulses formed a transparent film of cuprous oxide or cuprous hydroxide. The next impulses deposit copper crystals and the same type of film. The orientation of the copper crystal in the second layer is the same as in the first. This continues in every cycle until the end. Orientation of the final copper crystal is the same as the first, regardless of the thickness of the deposit.

A simple example of the results of periodic reversal would be to illustrate the deposition pattern on a brass metal plate 4 × 2.5 × 0.040 in. After a 15-hour periodic reversal deposit, the corners and edges of this brass plate would be 30 percent less nodular than the straight plated sample. Experiments have not clearly indicated the exact period for optimum leveling, but have shown the decided advantage over straight plating.

In these experiments a 20-sec cathodic interval and a 5-sec anodic plate interval were used. It has been reported[5] that optimum conditions for copper electrode-position with periodic reversal are: Total period of 15, 25 or 40 seconds with a ratio of cathodic time to anodic time of 7.

The work reported here was performed by Lincoln Laboratory, a center for research, operated by MIT with the joint support of the U. S. Army, Navy and Air Force.

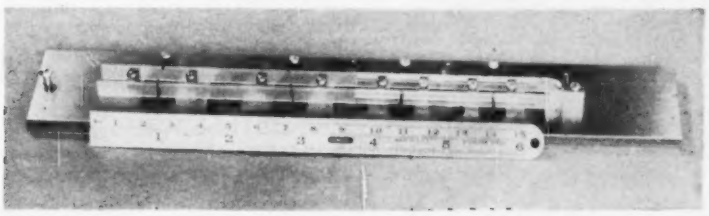

FIG. 8—Use of electroforming to make maser traveling waveguides eliminates air gaps

References

(1) A. A. Feldman, Electroforming of Waveguide Components for the Millimeter-Wavelength Range, NBS Cir 587, Nov. 15, 1957.

(2) E. B. Murphy, Electroplated Electrical Connections—Improved Through Hole Printed Wiring, *Plating*, **46**, p 828, July 1959.

(3) A. Brenner and S. Senderoff, A Spiral Contractometer for Measuring Stress in Electrodeposits (RP 1953) and Calculation of the Stress in Electrodeposits from the Curvature of a Plated Strip RP 1954), *Jour of Res of NBS*, **42**, Feb 1949.

(4) Ostroumov and Plokholmkona, Deposition of Copper from Acid Electrolytes with PR Current, *Zhur Priklad Khim*, **31**, p 1520, 1958 and *CA*, **53**, p 4, Feb 25, 1959.

(5) Vene, Yu Ya and Nikolaeve, The Influence of PR Reversals During Cu Deposition from Sulfate Solution, *Zhur Fiz Khim*, **29**, p 811, 1955 and *CA*, **51**, p 1752 b, 1957.

(6) S. Weln, Metallic Coatings on Non-Metallic Material-Silver Films, U. S. Dept. of Commerce, OTS, PB-111236, 1953.

Bibliography

S. Glasstone, "Introduction to Electrochemistry", Van Nostrand Inc., 1942.
"Metal Finishing Guidebook", Finishing Publications, Westwood, New Jersey.

Low-Distortion Transistor

Monitor amplifier for broadcast duty uses production lot power transistors for high fidelity and low distortion. Technique has other applications

By **HAROLD J. PAZ**, Radio Corporation of America, Camden, New Jersey

POWER TRANSISTORS are used in this monitor amplifier to eliminate the problems of hum, microphonics and heat. In addition, a reduction of size is obtained which is of value in many presently cramped studios.

The design objective was to produce a low-distortion, high-fidelity all-transistor power amplifier that does not require laboratory adjustment and selection of power transistors. Most present amplifiers require a power transistor with a beta cutoff of 30 kc for low distortion at 15 kc. But presently available power transistors have beta cutoffs of about 6 to 9 kc.

Distortion

There are a number of reasons for distortion at midband frequencies with presently available power transistors. In a class-B amplifier, beta mismatch distortion will cause one-half of the output signal to be larger than the other. There is, of course, a wide variation in the current gain, beta, of most types of power transistors.

The input impedance of a transistor has an effect on the gain and distortion of the driver and output stage. The common-emitter input impedance is $z_{in} = r_b + (\beta + 1)\, r_e$, where r_b is the base resistance, r_e is the emitter resistance and β is the current gain. But r_b, r_e and β are all inversely proportional to the current flow in the emitter. Typically, the input impedance can change from 2,000 ohms at an emitter current of 1 ma to 15 ohms at 1 amp.

Changes in the large signal current transfer ratio with the input base current drive is another reason for distortion in a high-power transistor amplifier. Figure 1 shows how rapidly the current transfer ratio of a power transistor decreases with collector current. The current transfer ratio is 140 at 100 ma but decreases to 60 at 1 amp.



FIG. 1—Current transfer ratio, beta, of a 2N301 or 2N301A power transistor varies with collector current

Local Negative Feedback

A new approach to the problem uses negative feedback to shift the dependence for ultralinear amplification from the critical selection of the power transistor to the circuit design. Negative feedback may be used to improve frequency response and reduce distortion. However, in a transistor amplifier using four or five stages, too much loop feedback can result in oscillation. The phase shift in each stage of a transistor amplifier is great. Therefore, the total phase shift of the amplifier greatly limits the maximum amount of loop feedback. Hence, loop feedback is not as successful in reducing distortion in a transistor power amplifier as local feedback.

An unbypassed emitter resistor provides local negative feedback. This external emitter resistor must be larger than the internal transistor emitter resistance. Low dis-

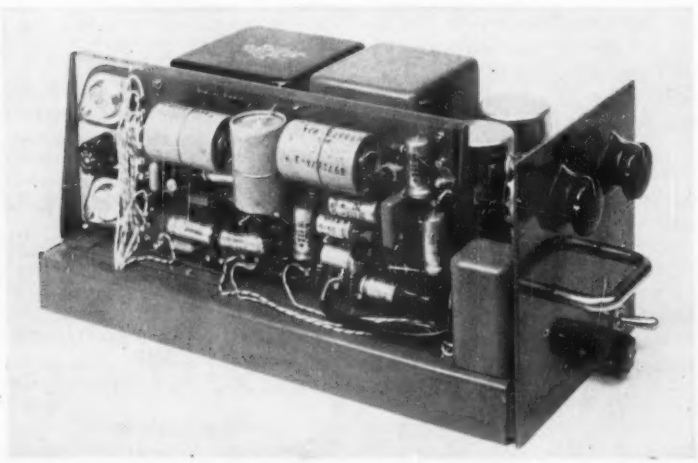

Transistorized monitor amplifier is 5 in. wide, 4¾ in. high and 12 in. long

Monitor Amplifier

tortion in a transistor amplifier is obtained when the transistor is driven by a low impedance source. Since the input impedance of a transistor operating in class B varies considerably with emitter current, a shunt resistor at the base input terminal will control this impedance variation. When using the 2N301A power transistor, a shunt base resistor 15 to 18 times the unbypassed emitter resistor will provide enough local feedback to control the effective current gain as well as the input impedance. This local feedback also compensates for beta mismatch, beta variation with base current drive and phase shift, and boosts the beta cutoff frequency from 9,000 to 30,000 cps.

Hybrid Transistor Amplifier

The new approach is a hybrid of the series[1] and the quasicomplementary[2] transistor amplifiers and is shown in Fig. 2. The input stage, Q_1, is a low-level class-A stage.

The complementary symmetry pair of transistors, Q_2 and Q_3, is used as a class-B direct-coupled phase inverter. Transistors Q_2 and Q_3 are directly connected to Q_4 and Q_5 which are two *pnp* transistors operating in class B and are used to drive the output pair of transistors, Q_6 and Q_7. Transistors Q_4 and Q_5 are coupled to Q_6 and Q_7 in a way similar to that used in the series power amplifier.

Local feedback has an important effect on the high-frequency response and distortion. By careful selection of resistors R_2 through R_7, local negative feedback is introduced. Surprisingly low distortion is measured when the ratio of R_4 to R_6 and R_5 to R_7 is 15 and the ratio R_2 to R_4 and R_3 to R_5 is 18.

Circuit Operation

In Fig. 2A, the collector voltage of Q_1 is one-half the supply voltage, V_{cc}, at zero input signal. The complementary symmetry phase inverter, Q_2 and Q_3, does not have a potential across the base to emitter junction because the output capac-

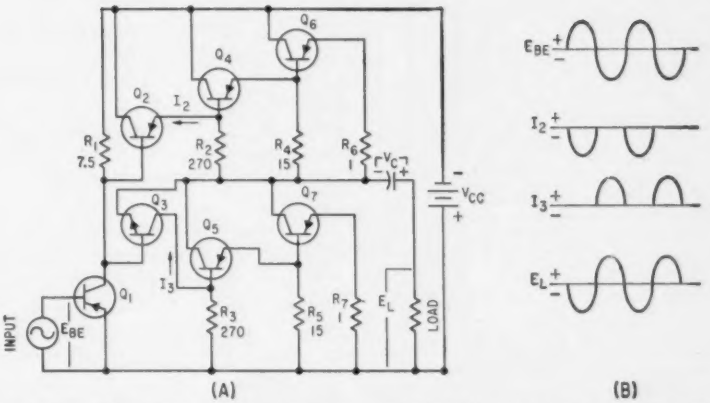

FIG. 2—The basic circuit of the hybrid power amplifier (A); and circuit waveforms (B)

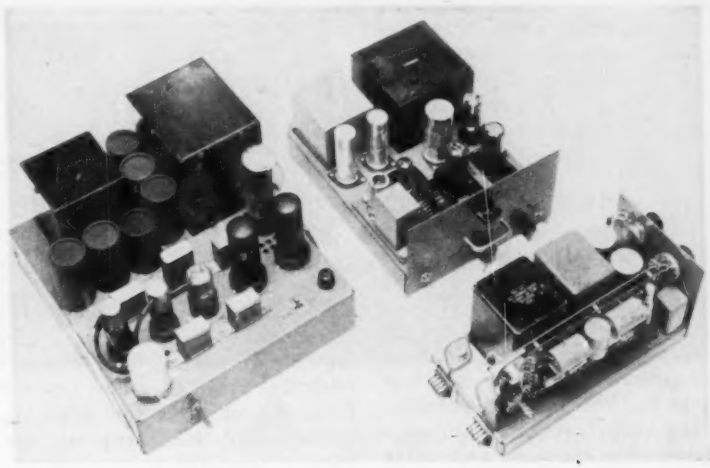

Obsolete monitor amplifier is shown at left. New transistorized unit is shown at lower right and unit it replaces is in the center

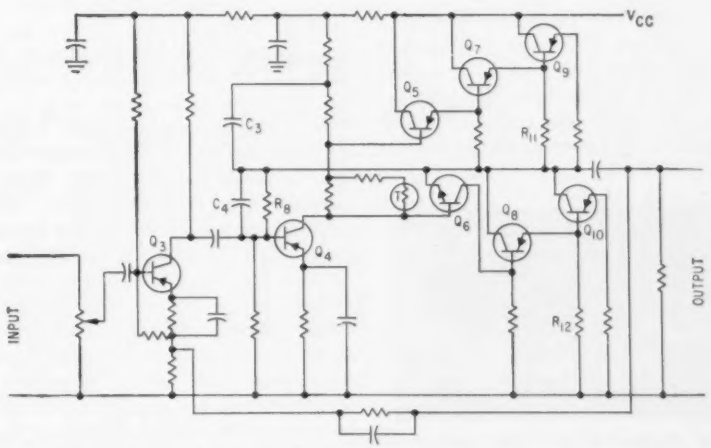

FIG. 3—Practical circuit of the hybrid complementary symmetry amplifier. Output at 10 w has less than 0.25-percent distortion



FIG. 4—Low-noise preamplifier has loop feedback and low-frequency noise filter at output

itor voltage V_c is equal to the collector voltage of Q_1.

If the collector voltage of Q_1 becomes more negative, then the base of Q_2 will be more negative than the emitter. This will turn on Q_2 and a voltage drop will appear across R_2. This voltage drop causes Q_4 and Q_6 to conduct. The base voltage that causes Q_2 to conduct is also applied to Q_3. This puts a reverse bias on Q_3 which prevents conduction. Since Q_3 is cutoff, Q_5 and Q_7 are also cutoff.

Thus the top half of the circuit, Q_2, Q_4 and Q_6, conducts only when the collector voltage of Q_1 is greater than $V_{cc}/2$, or when the base to emitter signal voltage E_{BE} of Q_1 is positive. When E_{BE} is negative, the collector voltage of Q_1 becomes less negative than the capacitor voltage V_c. This makes the emitter of the *npn* transistor Q_3 more negative than the base, and starts conduction in the transistor. However, this potential prevents conduction in *pnp* transistor Q_2.

As the *npn* transistor conducts, it produces a voltage drop across R_3 which puts Q_5 and Q_7 into conduction. Fig. 2B shows the relationship between input voltage E_{BE} and the current flow in Q_2 and Q_3. Notice



FIG. 5—Distortion of hybrid amplifier is less than 0.25 percent over frequency range from 30 to 15,000 cps

that the voltage across the load, E_L, is 180 deg out of phase with the input signal E_{BE}.

The practical hybrid complementary symmetry circuit shown in Fig. 3 is part of a transistor monitor amplifier which is designed for use in broadcast studios. Used with a two transistor preamp, the circuit provides 104 db of gain. This gain is enough to permit a microphone to drive 10 w of power into a loud speaker.

The input impedance of Q_2 should be high to prevent loading of the transistor noise filter used in the preamplifier. Capacitor C_2 provides positive feedback to the driver stage Q_4. The output stage operates at full power efficiently because the positive feedback reduces the drive



FIG. 6—Frequency response is within ±2db from 30 to 20,000 cps

voltage requirement. To reduce phase shift in Q_4, a drift transistor, type 2N247 was selected. The network R_8C_1 provides a third internal feedback loop from the output to the base of Q_4. High-frequency stability is improved by this loop.

Preamplifier

A two stage preamplifier is shown in Fig. 4. Transistor Q_1 is a low-noise element which can handle a high-input level without distortion because of loop negative feedback. Resistor R_9 feeds back some of the collector current to the emitter of Q_1. To keep low-frequency phase shift at a minimum, a series capacitor is not used in the feedback loop. The emitter feedback increases the input impedance of Q_1 and decreases the loading on the signal source. For good low-frequency response from a ribbon type microphone, the input impedance of the transistor amplifier should be over 4,000 ohms. Resistors R_9 and R_{10} should be 1-percent carbon film resistors to control preamplifier noise and gain. The preamplifier does not like to see an inductive load at the input terminals so capacitor C_1 is used. Capacitor C_2 is used to limit the preamplifier bandwidth.

A three-section R-C filter is used to cutoff the low-frequency response of the preamplifier. This network will filter out the low-frenquency transistor noise content. Transistor noise is also called flicker noise and is quite large below 30 cps.

Temperature Stability

Since the hybrid complementary symmetry amplifier (Fig. 3) uses direct coupling, control of the d-c collector current of Q_1 is important for temperature stability. Any drift here is amplified by the three direct-coupled class-B stages. Since the transistors operate in the class-B mode, the resistance of R_{11} and R_{12} is kept low enough to shunt most of the temperature sensitive leakage current, I_{co}, thus preventing its amplification. The thermal change in collector current of the class-B stage is mostly caused by a change in the transconductance of the transistor. To compensate for this, a thermistor is used to stabilize the quiescent operating point.

Distortion of the 10-w amplifier is shown in Fig. 5. At 10-w output, distortion is less than 0.25 percent over the complete frequency range. At 30 cps, distortion begins to rise at 10 watts because the filtering action of the power supply decreases with signal frequency.

Frequency response of the monitor amplifier is shown in Fig. 6 for an output of 1 w. When terminated with the recommended impedance the response is within ±2 db from 20 to 20,000 cps.

A model of the hybrid power amplifier is shown in the photographs. A metering switch is provided to measure transistor voltages. Input and output transformers are used to provide circuit isolation, with input impedances of 37.5, 150 or 600 ohms. The output transformer can handle loads of 4, 8, 16, 150 or 600 ohms.

REFERENCES

(1) M. B. Herscher, Designing Transistor A-F Power Amplifiers, ELECTRONICS, p 96, April, 1958.

(2) H. C. Lin, Quasi-Complementary Transistor Amplifier, ELECTRONICS, p 173, Sept. 1956.

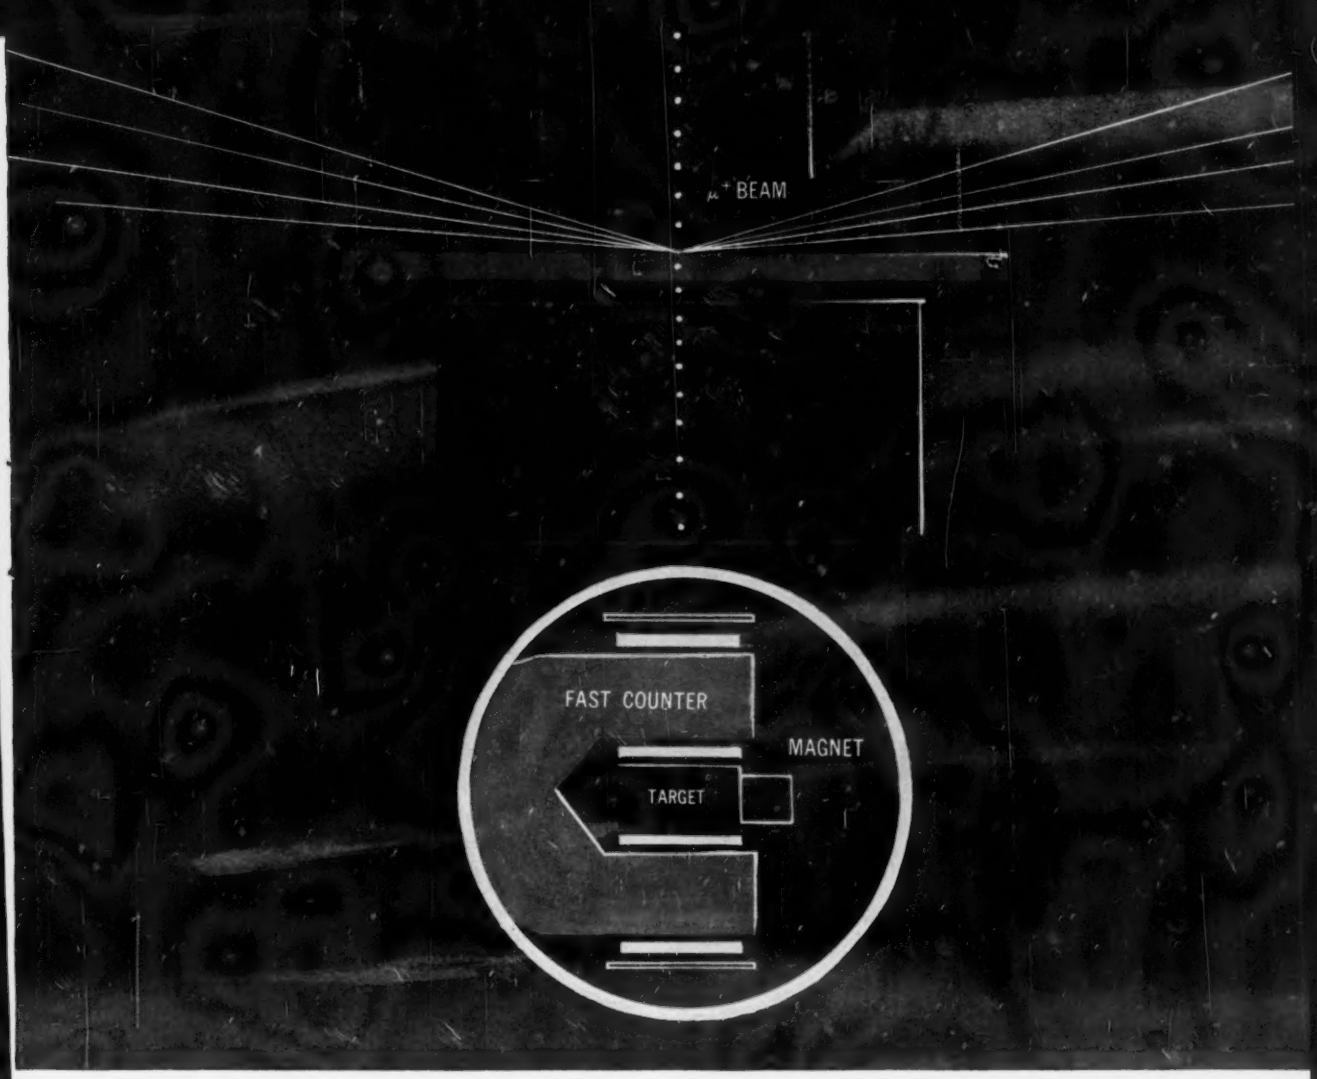

Report from IBM *Yorktown Research Center, New York*

THE IMPORT OF POLARIZED MESON BEAMS

Study of meson decay has led to further confirmation of parity nonconservation in "weak" interactions of high-energy particles by a group of scientists of the Columbia University Physics Department and the IBM Watson Laboratory at Columbia. Their work has also uncovered important new knowledge of the meson particle itself.

When T. D. Lee and C. N. Yang first proposed their now famous hypothesis of parity nonconservation, they pointed out that it implied a polarization of the spin of the μ meson emitted from stopped π mesons. About two years ago, precise experiments by R. L. Garwin and L. M. Lederman verified this predicted polarization with meson beams extracted from the Columbia University Nevis Cyclotron. More recently, polarized meson beams were used to measure accurately the magnetic moment of the μ meson. This experiment required apparatus for measuring time to 2/10,000 of a microsecond.

As a result of these studies and other independent investigations, the meson is now probably better understood than any particle except the electron. In fact, polarized meson beams have become a powerful tool for exploring magnetic fields in nuclei, atoms and interatomic regions.

IBM® RESEARCH

Investigate the many career opportunities available in exciting new fields at IBM. International Business Machines Corporation, Dept. 5542, 590 Madison Avenue, New York 22, New York

Plethysmograph consists of two sections that mate with guide pins and are held together with spring clip band

Digital plethysmograph is placed on finger. Spring clip insures tight but comfortable fit



Recording shows where subject took a deep breath at (A). Expiration of breath is followed by regression of baseline at (B)

Miniature Photocell Measures Blood Volume

Compact finger plethysmograph features ease of application, negligible lag and insensitivity to minor muscular movements

By **HENRY E. GUTTMANN,** Department of Psychology, University of Washington, Seattle, Wash.

CERTAIN MEDICAL diagnosis often requires knowledge of the amount of blood occurring in a limb or organ of the body.

With the availability of miniature photosensitive components, a device has been constructed that measures the amount of blood and the pulse rate occurring within a finger. Such a device is called a digital plethysmograph.

Construction

The device consists essentially of a split-ring assembly that is adjustable for different finger sizes as shown in the photo. One part of the split ring has guide pins which mate with corresponding holes in the other half. A spring clip bands the entire assembly and maintains a comfortable fit around the finger.

One of the halves is drilled to hold a miniature lamp while the mating half houses a miniature photocell with its sensitive surface opposing the light source. The amount of blood in the tissues at any instant determines the amount of light reaching the photocell. When a d-c amplifier is used, the slow changes due to relaxation or dilation of blood vessels or the more rapid pulse changes may be recorded. The photocell is connected in a conventional bridge circuit, and output is amplified and applied to a recording device.

Operation

The plethysmograph is placed on the subject's finger and the bridge is balanced to zero the recording device. Amplifier gain is adjusted until a suitable indication of the recording device occurs with the pulse beat. As ambient light may cause noise in the recording, an opaque cloth is placed over the hand and plethysmograph.

The device is relatively insensitive to minor muscle movements making it superior to the conventional hydraulic plethysmograph. In one study, it was required that the subject receive a mild electrical shock at intervals. The hydraulic unit was found unsuitable because of its sensitivity to the mild flinching that occurred. The photoelectric unit produces an essentially uncontaminated output.

Output of the photocell used was reasonably high. With 45 v applied to the bridge, an output of over 50 mv was obtained with the average pulse. The amplifier uses two tubes and a silicon chopper. Inexpensive germanium diodes have been used in the chopper with excellent results.

BIBLIOGRAPHY

W. E. Gilson, Photoelectric Plethysmograph, ELECTRONICS, p 116, July, 1944.
B. Shmavonian, A Methodical Study of Vasomotor Conditioning in Human Beings, *J Comp Physiol Psychol*, in press.
L. Fleming, Silicon Diode Chopper Stabilizes D-C Amplifier, ELECTRONICS, p 178, Jan. 1957.

are you silicon wait-bait?

avoid unnecessary delays

GT DELIVERS SILICON TRANSISTORS IN 24 TO 48 HOURS!

No need to get hung up with delays or hooked by unkept promises! GENERAL TRANSISTOR delivers sample quantities of GT Silicon Transistors in 24 to 48 hours... production quantities in 2 to 4 weeks!

These are not mere claims, but firm promises on which you can base your design and production schedules.

Quality? Yes—plenty of weight here without waiting. General Transistor is today one of the largest suppliers of highly dependable devices, delivering **quality** in **quantity.**

For full information—**and fast delivery**—call your local General Transistor representative, or contact us directly. Write for Silicon Brochure S-100.

GENERAL TRANSISTOR CORPORATION

91-27 138th Place, Jamaica 35, New York
Phone: Hickory 1-1000

A Few of the GT Alloyed Junction Silicon Transistors Now Available

- **HIGH SPEED SWITCHING**
- **MEDIUM SPEED SWITCHING**
- **HIGH VOLTAGE**
- **HIGH SPEED LINEAR AMPLIFIER**
- **MEDIUM SPEED LINEAR AMPLIFIER**

PNP:	2N1219	2N1220	2N1221	2N1222	2N1223
V_{CBO}	30 v	30 v	30 v	30 v	40 v
V_{CEO}	25 v	25 v	25 v	25 v	40 v
V_{EBO}	20 v	20 v	10 v	10 v	10 v
I_{CO}	.1 μa max.	.1 μa max.	.1 μa max.	.1 μa max.	.1 μa max.
h_{FE}	18 min.	9 min.	——	——	——
f_{ab}(mc)	5 min.	2 min.	5 min.	2 min.	2 typ.
h_{fe}	——	——	18 min.	9 min.	6 min.

FOR IMMEDIATE DELIVERY FROM STOCK, CONTACT YOUR NEAREST AUTHORIZED GENERAL TRANSISTOR DISTRIBUTOR OR GENERAL TRANSISTOR DISTRIBUTING CORP., 91-27 138TH PLACE, JAMAICA 35, NEW YORK. FOR EXPORT: GENERAL TRANSISTOR INTERNATIONAL CORP., 91-27 138TH PLACE, JAMAICA 35, NEW YORK. PRECISION MAGNETIC RECORDING HEADS AVAILABLE FROM GENERAL TRANSISTOR WESTERN CORP., 6110 VENICE BLVD., LOS ANGELES, CALIF.

CIRCLE NO. 123 READER SERVICE CARD 123

Ultrasonic Camera Supplements X-rays

PROTOTYPE tv camera works from sound instead of light waves. It can display internal structures of materials and of biological specimens. The system was described at The Institution of Electrical Engineers, London. It was built by C. N. Smyth and J. F. Sayers with support of R. W. Paul Instrument Fund Committee at Northampton College of Advanced Technology, London.

Internal flaws in blocks of aluminum immersed in a tank of water reveal their shape and size clearly. Electroplating that poorly adheres to the base metal shows as dark patches. Internal parts of goldfish and of some medical specimens can also be seen clearly. Sound intensities used are too small to have adverse biological effects, an important factor in examination of body regions sensitive to X-rays.

Ultrasonic Camera

The ultrasonic tv camera differs from ordinary tv cameras in that the light-sensitive surface is replaced by a sound-sensitive (piezoelectric) image-receiving surface. The quartz surface, under impact of sound waves, develops on each point of its surface a voltage proportional to sound intensity. The value of this voltage is detected, point-by-point, by electronic scanning. After amplification, the signal voltage controls brightness of a tv receiver to produce a visible image of the invisible internal structure under examination.

The equipment takes advantage of the fact that sound waves can be focused with lenses, and images of objects exposed to sound can be formed and reproduced at a distance. At frequencies from 1 to 20 mc, sound wavelengths in water or oil are only fractions of a millimeter and sound lenses 10 cm across are very efficient.

In operation, the object is immersed in a c-w ultrasonic field. The resulting image is formed on the piezoelectric plate, which is the end wall of the scanning tube.

Tube Operation

The ultrasonic illumination is switched on for alternate frames only. During the frame in which the ultrasonic source is on, electrons arrive at the insulating surface during positive half cycles of the piezoelectric alternating potential. The surface becomes negatively charged to its peak value. The outer surface of the quartz plate rests against a conducting electrode, transparent to sound, and is grounded at sound frequency (4 mc) but not at the output signal range of frequencies (0 to 2 mc). Current flow to this electrode is the output signal from the camera.

The static charge produced on the quartz must be removed before the camera can rescan the picture. The tube contains residual gas at a pressure of about 10^{-4} mm Hg. The scanning beam consists of mixed ions and electrons. An ion trap mesh is placed about 1 cm from the quartz, and only ions produced in this space are able to reach the quartz. When the surface of the quartz is positively charged, it collects negative charge predominantly from the electrons; when it is negatively charged, it collects positively charged ions only. The mixed beam therefore stabilizes the surface at cathode potential. To make times of charging and discharging frames equal, beam current is increased during alternate frames to provide enough ion current in the time available.

Construction

The camera comprises a 4.5-cm diameter glass envelope, fitted at one end with a crt gun and zirconium getter wire. At the other end is the ion trap screen and the quartz plate with an intervening annulus of nonmagnetic steel to maintain an orthogonal electric field in the decelerating space.

The possibility that a single piece of piezoelectric material would, if damped by a liquid, sustain a varying vibration intensity distribution over its surface in synchronism with the driving force distribution, rather than resonate as a whole, was first suggested by Sokolov.

Quartz has a good piezoelectric sensitivity, producing at 4 mc a camera face voltage of 150 mv for an incident sound intensity of 1 $\mu w/cm^2$. In the absence of interfering effects from the scanning system, sensitivity would be limited by noise at about 10^{-9} w/cm^2. At these low sound levels there is no damage to biological tissues.

The Q of quartz damped on one surface by a liquid is reduced to about 18, under which conditions there is little loss of image resolving power due to the multiple internal reflections. The first interference fringe or halo is more that 20 db below the main signal. Resolution is about 0.5 mm at 4 mc. Cameras are operated in or near resonance to produce strain in the quartz, one surface of which is free.

Simulator for Nuclear Ship Crew

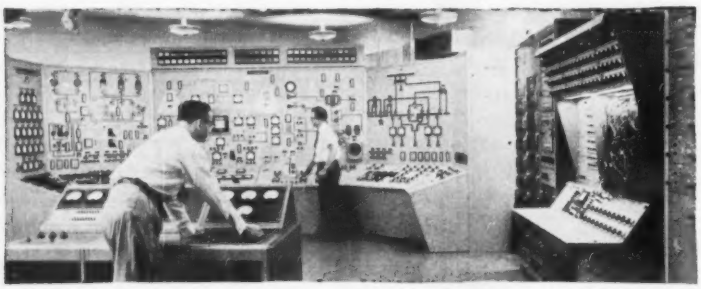

Analog computer is heart of Westinghouse simulator for training crew of nuclear ship N.S. Savannah. In addition to orders from the bridge, instructors can simulate malfunctions. Strip charts record crew's reactions

Computer Design May Foster New Parts

DEVELOPMENT of microscopic parts for a small but complex computer

Tubes are built for rugged service—at **SPERRY**

Hammer drop typifies tough environmental testing that assures dependability of Sperry TWT amplifiers.

New high-power S-Band Traveling Wave Amplifier

2.0-4.0 kmc with 300 watts nominal output power

STS-101

SPECIFICATIONS

Frequency Range	2.0-4.0 kmc
Small-Signal Gain	40 db
Output Power	300w (nom)
Saturated Gain	35 db
Beam Voltage	5.2-5.6 kv
Beam Current	380 ma
Heater Voltage	6.3 v
Heater Current	2.6 a
Helix Current (full)	8 ma

Small-Signal Gain vs Frequency

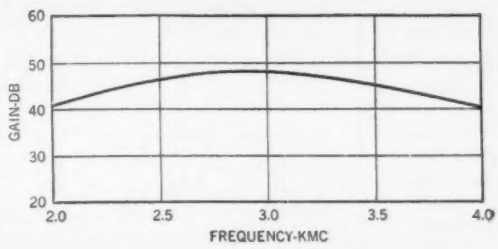

Saturated Power vs Frequency

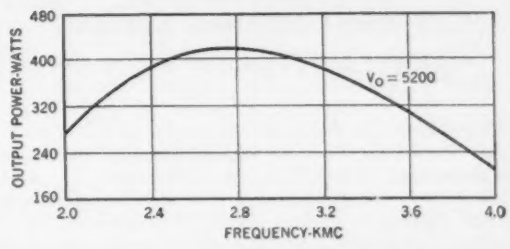

This new broadband, high gain cw traveling wave amplifier is the only tube in S-band—delivering 300 watts nominal—for service in microwave systems, high performance tracking radars, high frequency communications networks and other applications where high power and high gain in the 2.0 to 4.0 kmc frequency range are desirable. This tube features rugged, all metal-ceramic construction for high performance aircraft environments and is short-circuit stable.

The STS-101 may well be suited to projects or problems you are working with now. Write for data regarding your application.

SPERRY

ELECTRONIC TUBE DIVISION, *SPERRY GYROSCOPE COMPANY, GREAT NECK, NEW YORK, DIVISION OF SPERRY RAND CORPORATION*
Address all inquiries *to Great Neck or Sperry offices in Brooklyn, Boston, Philadelphia, Los Angeles and Montreal. Export Dept., Great Neck, New York*

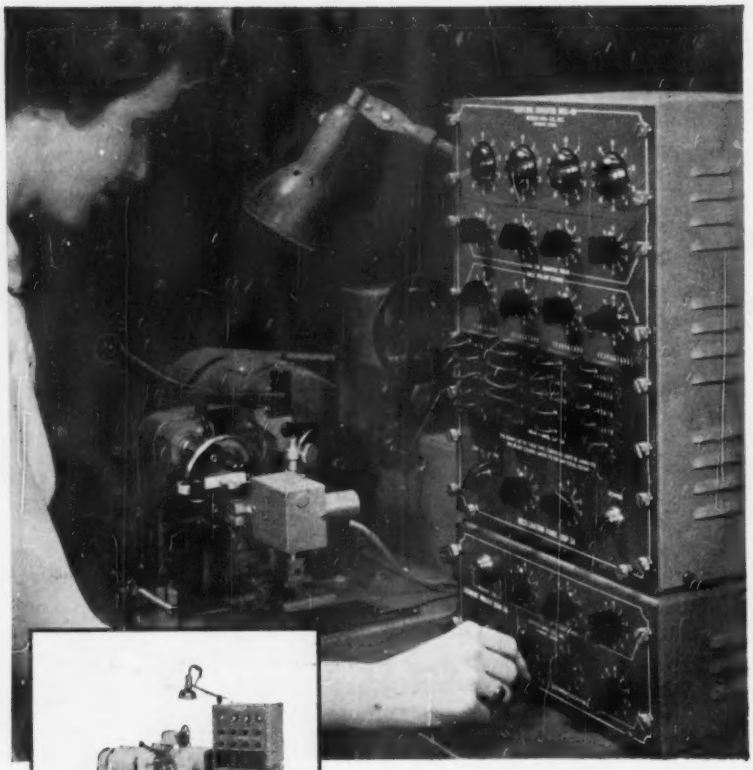

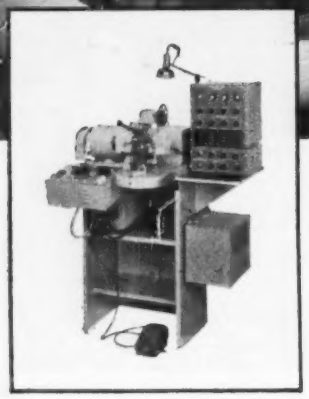

BOESCH

electronically controlled toroidal winder

- *speeds up to 2000 turns per minute*
- *4-digit, 2- or 7- position predetermined counting*

The entirely NEW electronic system of the TW 300 provides unmatched features in a toroidal winder . . . proximity pick-up for use with any size wire without physical contact . . . 100% accurate turns counting . . . controlled slow-start, slow-stop driving motor . . . automatic segmental winding with perfect repeatability . . . progressive winding of segments or continuous coils in either direction.

The TW 300, designed for easy servicing and maintenance, cuts production time and operator fatigue to the bone. Flexibility in production of new coil types with superior electrical characteristics is unlimited because of the new control system with automatic winding features. This machine is a significant advance toward complete automation of toroidal winding.

WRITE FOR COMPLETE DATA

B BOESCH

BOESCH MANUFACTURING COMPANY, INCORPORATED
DANBURY, CONNECTICUT

is one objective of an extensive research program under way at California Institute of Technology. The program could result in new components and techniques that would have a major effect on many areas of electronics.

Investigators are studying microscopic bits of material whose electrical properties differ from larger pieces. They are also developing alloys with new electrical properties—all with the aim of miniaturizing electronic devices.

Electrical properties being studied are the semiconducting properties of materials such as silicon and germanium, the magnetic properties of ferromagnetic materials such as nickel-iron alloys and the superconducting properties at cryogenic temperatures of such materials as tin and lead. The latter two electrical properties can be used for memories and logic circuits.

Miniature Computer

A major application of the tiny components—some comparable in size to a single neuron—will be a compact computer able to work hundreds of times faster than existing large computers and with a much larger memory.

Speed will be increased because switches only a few millionths of an inch in size will work faster than the larger ones now in use. Also, the electricity will travel much shorter distances. Speed of electricity is becoming a limiting factor in computers.

One phase of the program is concerned with developing a memory device that will permit an information storage density of the order of 100 million bits per cubic inch. The program is also concerned with creation of new electrical and energy conversion properties of materials. Electrical energy has been and probably will continue to be the most convenient medium for instrumentation and data processing. Therefore new and more efficient methods of converting other forms of energy into electrical energy are being studied.

The engineers are using developing techniques to obtain the microscopic amounts of substances. One method is to heat the substance in a vacuum so that molecules of it will vaporize and collect as a thin

film on a glass slide. They are especially interested in the switching ability of the substances. The very thin films of naturally magnetic materials are capable of extremely high-speed switching.

It is believed that memory devices can be made even smaller with superconductive techniques. Superconducting metals could make excellent memory units and also switching devices requiring very small amounts of electrical energy to operate.

The researchers are also investigating paramagnetism, in which garnets and certain rare earth combinations show slight increases in magnetism under some conditions.

Circuit Problems

Developing microscopic electronic components brings up a new problem: making circuits small enough to link them. One process is photoetching, in which a thin layer of copper is deposited on a glass plate or other insulating material. A photographic process is used to project a picture of the desired circuit on the copper, and acid eats away the copper not coated with an acid-resistant film. The electronic components are then attached to the copper lines.

Slices of miniature circuits can be sandwiched atop each other, separated by an insulation coat only a few millionths of an inch thick. Each layer can be linked with the others.

The group may experiment with an electron beam circuit tracer. The beam would be one twenty-millionth of an inch in diameter. It would be used in a vacuum in which there is a vapor of silicon. The beam would fix a tiny line of silicon onto a thin copper sheet. The rest of the copper would be etched away. Sometime the group may be able to write down circuits in microscopic amounts of the materials comprising the electronic components.

Such problems of circuitry and those of getting information in and out of a small computer (possibly by signals from a photoelectric cell) are among the many that will require solving. As problems are resolved in this field, discoveries will probably be made that will have applications even beyond those imagined by the investigators.

NEW ZENER VOLTAGE TESTER*

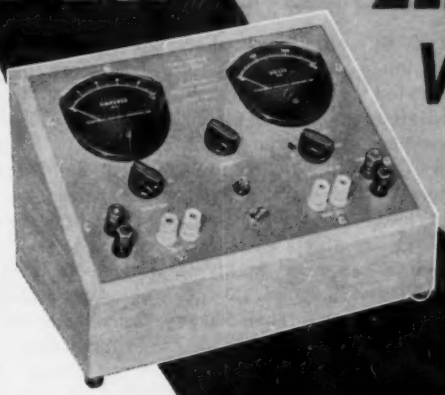

Provides Automatic Presentation Of: zener diode voltage . . . transistor breakdown and zener voltage . . . diode inverse and reverse voltages. Also Tests For . . . zener diode impedance.

APPLICATIONS:

- *Laboratory Experimentation*
- *Circuit Design*
- *Quality Control*
- *Trouble Shooting*
- *Production Testing*

ERA's new Zener Diode Tester, Model DT100 is a self contained AC operated instrument designed for direct reading of zener voltage as a function of diode current. Provisions are also included for AC modulation of the diode current to permit the determination of zener impedance or zener slope for any given value of diode current. The instrument incorporates a wide range adjustable constant current generator which injects the desired value of current into the diode under test and maintains this current constant independent of line voltage fluctuations or zener voltage and impedance. The voltage appearing across the non-linear diode impedance is read directly by a high impedance DC voltmeter for the given current setting.

SPECIFICATIONS

Input Source	*115VAC, 60cps*
Zener Voltage Range	*0-300VDC*
Zener Current Range	*50 Microamperes-50ma*
Measurement Accuracy	*Better Than 2%*
Metering	*Direct Reading Ez, Iz*
Zener Impedance	*Provision for AC Modulation Iac, Eac Reading*
Physical	*Sloping Front Cabinet, Size: 12 x 8 x 19 inches*

Model DT100 $275.00

FOB Factory, Subject to change without notice

ERA manufactures a full line of transistor test equipment and transistorized devices. Write for complete technical bulletin on this (Catalogue #115) and related devices.

**Pat. Appl. For*

ELECTRONIC RESEARCH ASSOCIATES, INC.

67 Factory Pl., Cedar Grove, N. J. CEnter 9-3000 TWX NJ1144

SUBSIDIARIES

Era Electric Corporation • Nutley, N. J. Era Pacific Inc. • Santa Monica, Cal.

CIRCLE NO. 127 READER SERVICE CARD 127

Developments in Composite Laminates

RECENT TECHNICAL advances in bonding various metallic and nonmetallic materials to laminated plastics have opened up new design opportunities using combination laminates, reports Taylor Fibre Co., Norristown, Pa., manufacturer of laminated plastics and vulcanized fibre.

It is now possible to bond virtually any compatible material with a laminate to form a composite combining the advantages of both.

Becomes Standard

One of the first combination materials was copper-clad laminates used for etched printing circuits. With the rapidly increasing use of printed circuits, copper-clad laminate has become a standard engineering material in our industry.

More recent composite laminates are usually manufactured to customer specifications. Among those which Taylor has produced are:

Vulcanized fibre-clad laminates. These combine the high strength of laminated plastics with the superior hot arc resistance of vulcanized fibre. They have been used in switch gears for both low and high voltage applications. Other applications are suggested where the high impact strength of vulcanized fibre may prove advantageous.

Rubber-Clad Laminates. Almost any type of natural or synthetic rubber, including Buna N and Buna S, may be used as the cladding material. The composite laminates are widely used to protect the laminate against highly alkaline electrolytes. They have application where sealing or chemical resistance is needed, as in battery tops; and for isolating vibration, as in shock absorbers.

Asbestos-Clad Laminates. Laminated plastic clad with untreated asbestos paper has high heat resistance and arc resistance.

Laminate-Clad Lead. Lead sheets bonded between Grade XX paper-base laminates have been used for x-ray shields. The laminate provides strength and also contributes to lead's high shielding properties.

Aluminum-Clad Laminate. Laminated plastics with aluminum cladding have been used extensively for engraving stock. The laminate base is black in color, providing a good contrast with the aluminum when the design is etched away. Aluminum-clad laminates also offer possibilities as a printed circuit material, but soldering problems remain to be solved. Another application is for plate holders for x-ray machines where the aluminum not only acts as a shield, but also resists abrasion.

Beryllium-Copper Clad Laminates. Beryllium copper is nonmagnetic and a good conductor. The composite material has possibilities for printed circuit applications.

Stainless Steel-Clad Laminates. This material also has application where nonmagnetic properties are required. Other applications are in certain corrosive environments where stainless steel's resistance to attack is an asset.

Reduces Weight

Magnesium - Clad Laminates. Long sheets of this material are used as a screen for x-ray operators. The lightness of the magnesium greatly reduces weight.

Silver and Gold-Faced Laminates. The extremely high electrical conductivity of silver and gold indicates possible use of the composite materials for electrical contacts. The laminate provides strength and insulation properties.

Metal cladding can be bonded to almost any grade of laminate. It is usually necessary, however, to treat the metal before bonding to eliminate oxides.

A variety of materials may be bonded to vulcanized rubber. Aluminum-clad fibre has been investigated as a possible material for capacitors.

Combination laminates and vulcanized fibre can be specified in sheet, rod or tube. Available sizes are same as for the base material.

Automatic Transistor Production

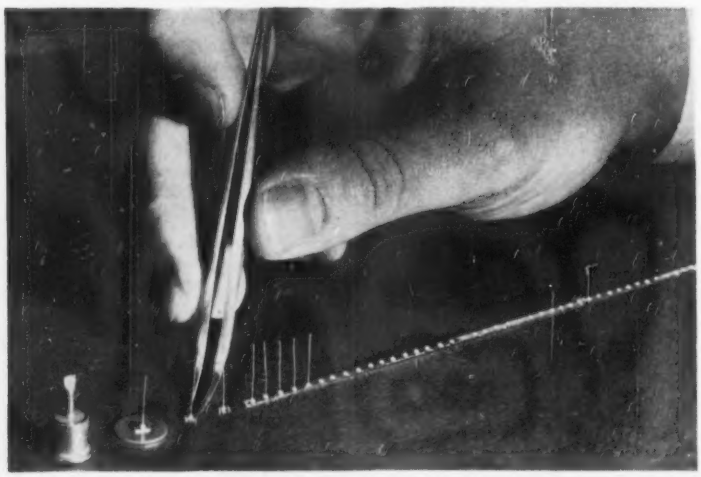

Successful growth of long, flat ribbons of high-quality semiconductor materials may be a major step towards automatic manufacture of transistors and diodes. Here a hand-built version shows how semiconductor units are formed as a series of dots along the mirror-flat surface of a germanium strip. Crystalline dendrites form rapidly into strips about an eighth inch wide and a few thousandths of an inch thick. Individual functioning units have been prepared by the Westinghouse semiconductor department at Youngwood, Pa.

Growing High-Purity Silicon Carbide

ABOUT TWO YEARS ago, William Shockley theorized that growing silicon carbide crystals from solution in alloy melts might solve the present problem of producing high-purity crystals.

Silicon and germanium crystals are usually grown by slow crystallization of the melted compound

ROLLED or DRAWN ALLOYS

NICKEL
MONEL
INCONEL

for the widest range of sizes specify

DRIVER HARRIS

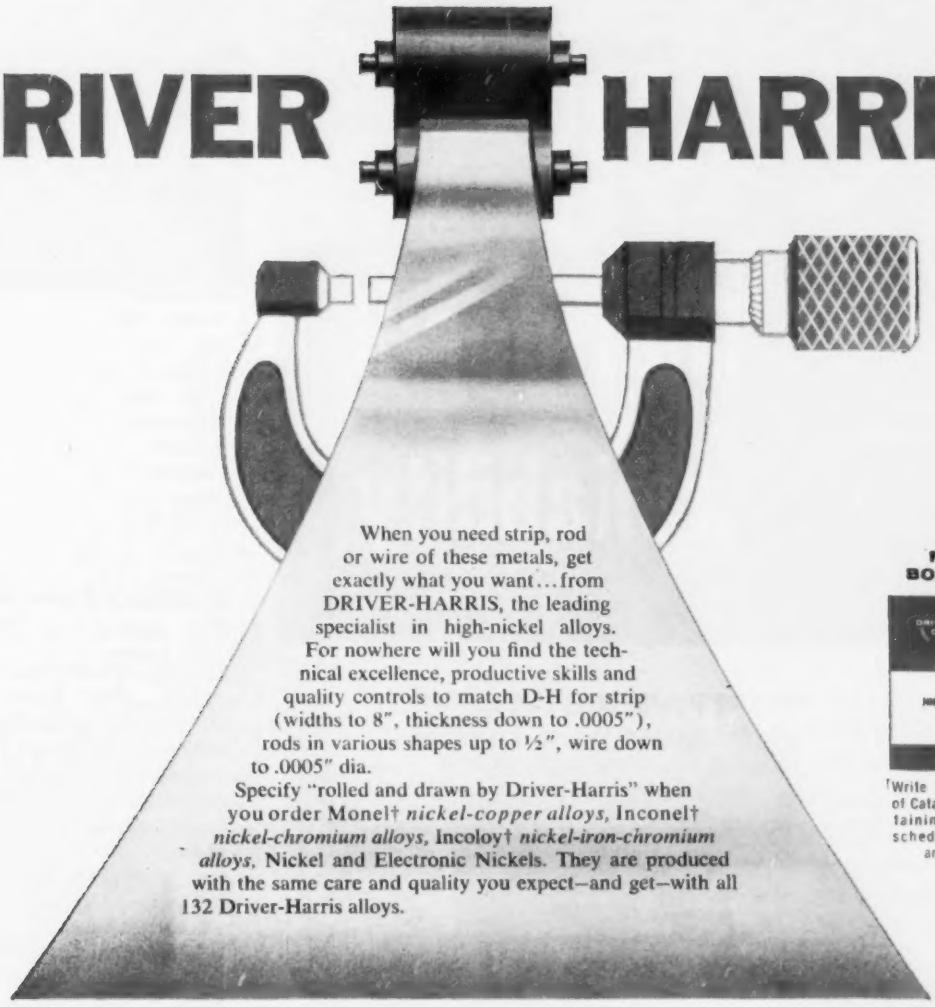

When you need strip, rod or wire of these metals, get exactly what you want... from DRIVER-HARRIS, the leading specialist in high-nickel alloys. For nowhere will you find the technical excellence, productive skills and quality controls to match D-H for strip (widths to 8", thickness down to .0005"), rods in various shapes up to ½", wire down to .0005" dia.

Specify "rolled and drawn by Driver-Harris" when you order Monel† *nickel-copper alloys,* Inconel† *nickel-chromium alloys,* Incoloy† *nickel-iron-chromium alloys,* Nickel and Electronic Nickels. They are produced with the same care and quality you expect—and get—with all 132 Driver-Harris alloys.

FREE BOOKLET

†Write for your copy of Catalog N-59 containing complete schedule of sizes and prices.

†T.M. REG. U.S. PAT. OFF. ††T.M. THE INTERNATIONAL NICKEL COMPANY, INC. PRODUCTS OF HUNTINGTON ALLOY PRODUCTS DIVISION.

DRIVER-HARRIS* COMPANY

HARRISON, NEW JERSEY • BRANCHES: Chicago, Detroit, Cleveland, Louisville

Distributor: ANGUS-CAMPBELL, INC., Los Angeles, San Francisco • In Canada: The B. GREENING WIRE COMPANY, Ltd., Hamilton, Ontario

MAKERS OF THE MOST COMPLETE LINE OF ALLOYS FOR THE ELECTRICAL, ELECTRONIC, AND HEAT-TREATING INDUSTRIES

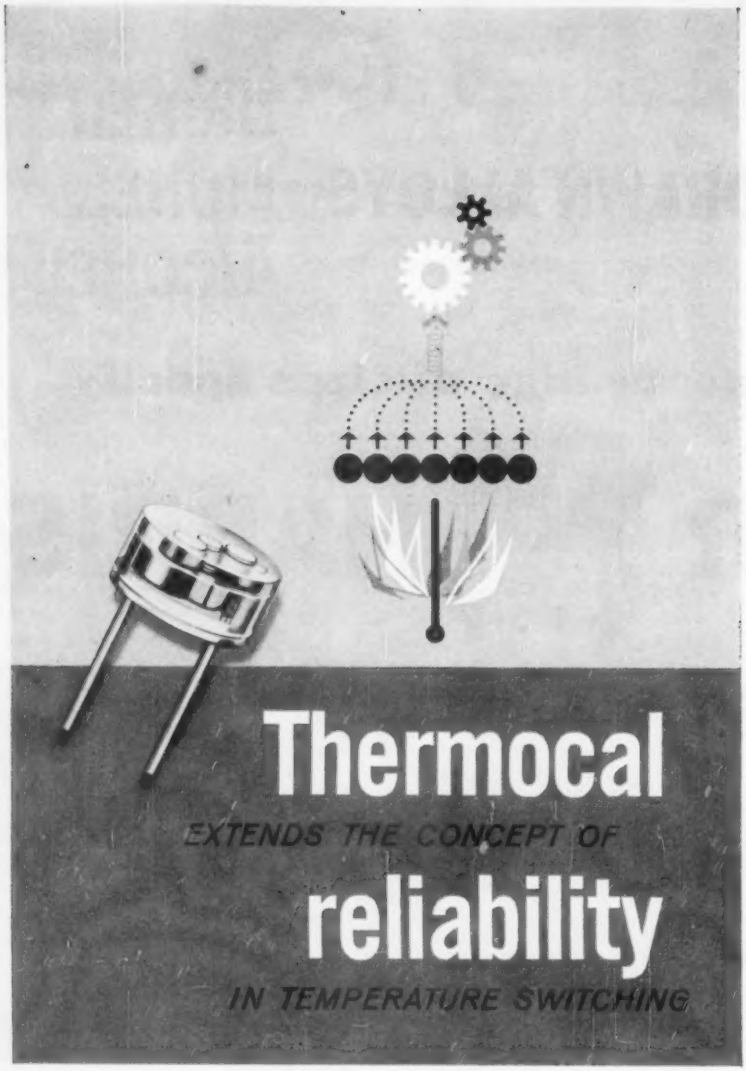

THYRASTAT®

... fail-safe overheat protection

NEW miniature, hermetically sealed, single-shot, temperature-sensitive switch provides FUNCTIONAL RELIABILITY for positive over-temperature protection. Factory preset within 1% of specified temperature.

TEMPERATURE RANGE: +113° F. to +1500° F.
CURRENT RANGE: 10 to 500 Amperes
SPST Normally open or closed types.

Patents Pending

Write for new Brochure containing complete specifications:
advanced concepts of precision specialty switches for maximum protection

thermocal
1631 COLORADO AVENUE
SANTA MONICA, CALIFORNIA

onto a seed crystal. However, silicon carbide does not melt at ordinary pressures, but rather vaporizes and decomposes.

The Shockley theory was put into practice at the Stanford Research Institute's ceramics technology group under a subcontract from the Bureau of Ships and the Shockley Transistor Corporation. At Stanford, Frank A. Halden and coworkers melted pure silicon in a carbon receptacle. The carbon of the crucible diffused into the molten silicon and saturated the solution. A cool spot was produced in one area of the solution by careful temperature control. This resulted in a localized area of supersaturated solution from which silicon carbide crystals can be grown.

At present the SiC crystals are too small for commercial use. But the process shows enough promise for the Electronic Warfare and Parts Branch of BuShips to extend the research another year, giving Halden time to come up with methods of growing large crystals.

This project may be a promise to raise the temperature limits for transistors and diode operation up to 1,800 F. At the present time, transistors of germanium and silicon are limited to operate only up to 190 F to 450 F.

Casting Pure Silicon For Infrared Optics

SILICON INFRARED optics can be designed with greater economy through the perfection of a new technique for casting pure polycrystalline silicon of the highest optical quality, developed by the Semiconductor Division of Hughes Aircraft, Newport Beach, California. Repeated tests demonstrate conclusively that there is no significant difference between transmission and emmisivity of cast polycrystalline silicon and grown single crystal silicon.

Scattering characteristics of polycrystalline silicon are closely similar to those of a single crystal, and are not affected by wide variations in grain size. Density is the same as that of the single crystal material. Cast silicon has about 80 percent of the breaking stress and modulus of

elasticity properties of the single crystal material.

The casting method calls for the use of vacuum metallurgy. Vacuum induction furnaces, purchased by Hughes in this connection, were made by Consolidated Electrodynamics Corp., of Rochester, New York.

Insulating Ferrite Memory Cores



Polyurethane pad insulator

A SERIES OF temperature controlled memory planes, designed to function efficiently in adverse environments, is under development by the Applied Logics Division, General Ceramics Corporation, Keasbey, New Jersey.

The new unit solves the problem of insulating ferrite memories. Because the ferrite cores are sensitive to mechanical pressure, selection of a suitable thermal insulating material was a problem. A pad of polyurethane placed on either side of the memory plane, proved to be a satisfactory solution.

First in the series is a 16 x 16-core array, together with its temperature controlled assembly, enclosed in a 4 x 5 x 1-in. magnesium case. For airborne applications, the present design functions at 85 C ±7 deg in an ambient from −55 C to + 85 C. It maintains its temperature at 60,000 feet. Warm-up time is less than five minutes.

Daniel Haagens of General Ceramics, manager of the division, announced that they were working on other units for an ambient of 100 C and for applications in ground equipment.

The device shown meets the specs of MIL-E-005272B, USAF.

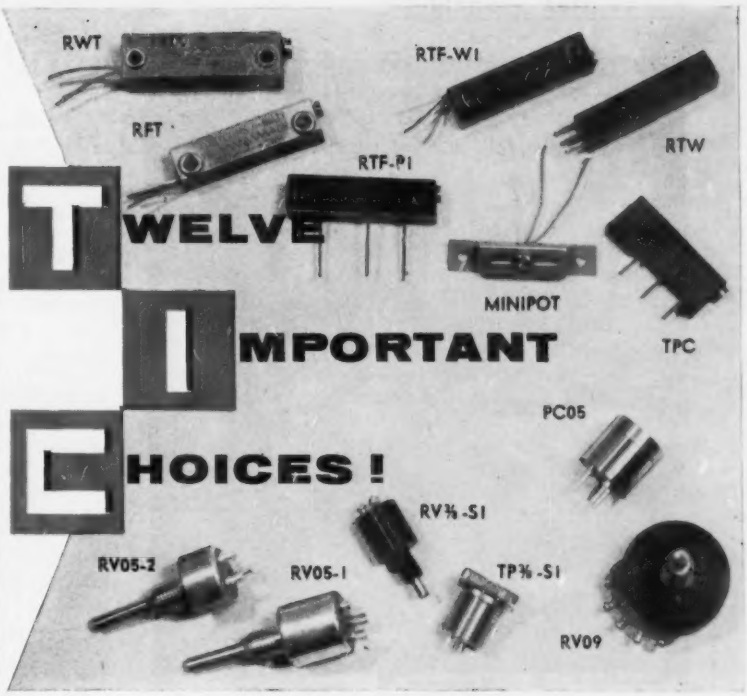

TWELVE IMPORTANT CHOICES!

PRECISION TRIMMER POTENTIOMETERS by TIC are standard in twelve different styles and each in a wide range of resistance values. The extensive use of trimmers in such applications as airborne, shipborne and ground based military electronic equipment for navigation, flight control, fuel control, radio transmission and reception, telemetering, computers, fire control and many others demands reliability and stable operation under severe environmental conditions. TIC quality-control procedures and environmental testing assure the user of the ultimate in dependable trimmer potentiometers.

TWELVE IMPORTANT CHOICES — six box type and six rotary type multiturn and single turn with wirewound or metallic film resistance elements, high temperature-resistant construction, varied mounting methods, and sizes ranging from micro-miniature to the size of a quarter in diameter, permit the design engineer optimum freedom to select the unit best suited to his application. Special designs may be readily accommodated by TIC engineers.

For new catalog of the trimmers illustrated above write, wire or call

TECHNOLOGY INSTRUMENT CORPORATION

Subsidiaries: Technology Instrument Corp. of Calif. North Hollywood, Calif.
Acton Laboratories, Inc., Acton, Mass.
Tucson Instrument Corp., Tucson, Ariz.
Servotrol, Inc., Chicago, Ill.
Altomac Corp., Canton, Mass.

569 MAIN STREET
ACTON, MASS.

CIRCLE NO. 131 READER SERVICE CARD 131

Overall view of transistor assembly machine. Controls, water and etchant supplies are not shown

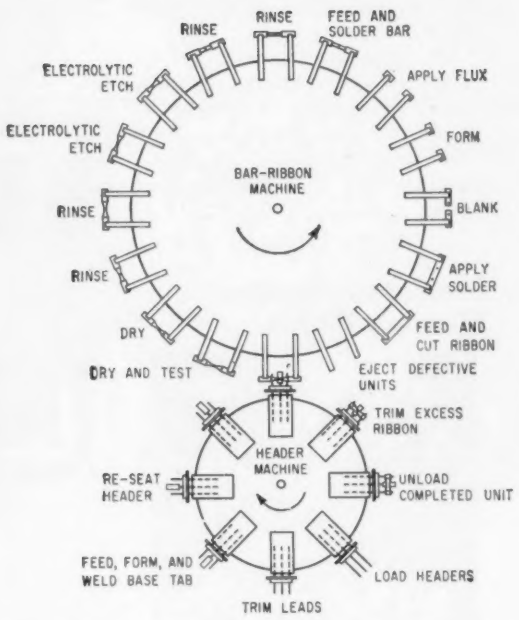

FIG. 2—Sequence of operations performed on bar-ribbon and header assembly rotary index tables

Mechanized Transistor Assembly

By R. C. SHAFER, Engineering Department Chief, Western Electric Co., Inc., Allentown, Pa.

FIRST STEP in the development of an automatic assembly machine for grown junction transistors was redesigning the transistor to facilitate automatic handling (Fig. 1).

The machine is built around two commercial, clutch-actuated rotary index tables mounted on a single rigid base. The bar-ribbon assembly and the header, the two major subassemblies of the transistor, are prepared on 16-station and 8-station index tables, respectively, and are joined at a common weld station. Fig. 2 depicts the sequence of machine operations.



FIG. 1—Old transistor design at left, mechanized assembly design at right

An endless roller chain encircles each table and drives all of the work stations associated with that table. Work stations requiring only vertical movement are operated from face cams driven from the roller chain through a sprocket. Work stations requiring a multiplicity of movements have their own cam shafts which are driven from the roller chain through helical gears and sprockets.

Although most station movements are cam controlled, air cylinders are used on the trimming, forming and welding stations. Solenoid valves are used to control the flow of deionized water, etchant, air and nitrogen, which is used for drying the etched and rinsed bar-ribbon assembly.

Over-all machine timing is controlled by a sequential cam timer in the control set. Individual work stations are synchronized by the roller chains which are driven by ratio motors through single revolution clutches.



Ribbon feed station. Rollers at right straighten ribbon

The control cabinet also houses 4 separate power supplies for electrolytic etching, 3 capacitor discharge welding supplies, power supplies for soldering, interlock control circuits and a test circuit. This test circuit checks the completed bar-ribbon assembly before it is welded to the prepared header. If the bar assembly is defective, the

Engineers seeking stimulating careers set a course to Link . . . in Binghamton, New York

Set sail on a well-charted course! Engineers with a circumspect eye on the future choose their place of employment only after careful, soul-searching deliberation. Link Aviation, Inc., Binghamton, N.Y., has all the necessary ingredients for stimulating careers:

The company - As the pioneer and leading producer of electronic flight simulators, Link has greatly expanded its capabilities in fields such as automatic control, optical and visual display systems and data processing. For example, Link is now the world's largest producer of analog computing equipment.

Working environment - Management men are engineers. They understand your work and point of view. This kind of administration provides engineering thinking right up to policy level.

Living environment - Binghamton, N.Y. is a delightful place to live. Located at the tips of the famous Finger Lakes, Link-Binghamton abounds in year-round recreation . . . boating, fishing, hunting, water skiing and camping. Charming homes, modern schools, and convenient shopping centers are in abundance.

Additional benefits - include excellent salaries, generous hospital, health, retirement and profit-sharing benefits, and graduate level courses underwritten by Link.

The positions - Openings exist for engineers qualified in the following fields: analog and digital computer components and systems, radar simulation, advanced circuit development, ASW/AEW systems simulation, fire control computer design, optical systems development.

Hoist anchor now! Write to
Mr. A. K. Darrah, Link Aviation, Inc., Binghamton, N.Y.

A subsidiary of General Precision Equipment Corporation

LINK — A GENERAL PRECISION COMPANY

LINK AVIATION, INC.

Write for information regarding openings at our Research and Development laboratories in Palo Alto, California.

BORG

FREQUENCY STANDARDS



STABLE TO ONE PART IN A BILLION . . .

or more technically stated, one part in 10^9 for a twenty-four hour period. This rate error is equal to that of a clock varying one minute every 1920 years! Designed for airborne, shipboard and stationary applications to operate from either 400 cycles, 60 cycles, 110 volts or 28 volts D.C. with or without standby battery. Borg Frequency Standards withstand extremes of temperature, humidity, vibration and shock. Want the complete story? It's yours for the asking . . . brochure BED-A94 for mobile applications, BED-A95 for stationary.

. . . another Borg Frequency Standards application — nuclear-powered submarines . . .

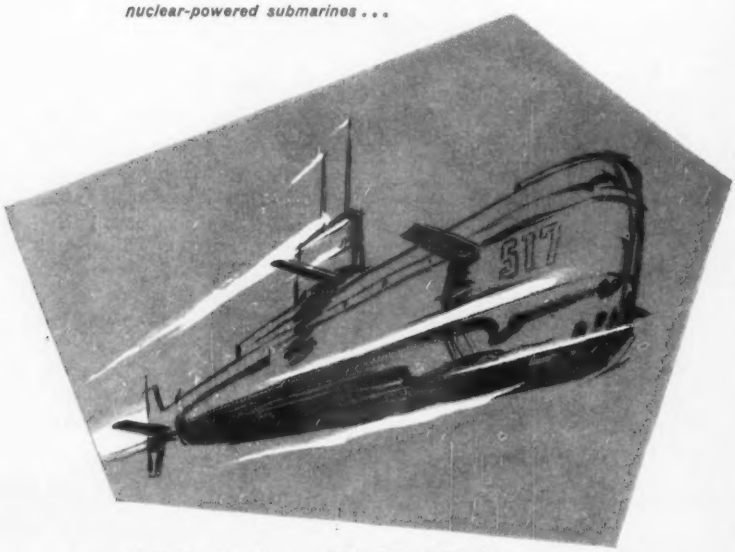

Write for brochures BED-A94, BED-A95

BORG EQUIPMENT DIVISION
AMPHENOL-BORG ELECTRONICS CORPORATION
JANESVILLE, WISCONSIN

MICROPOTS • MICRODIALS • INSTRUMENT MOTORS • FREQUENCY STANDARDS

134 CIRCLE NO. 134 READER SERVICE CARD

test circuit prevents the header table from welding it to a header.

In preparing the bar-ribbon assembly on the 16-station table, Kovar ribbon is fed from a supply spool, straightened by rollers, cut and loaded into insulated carrying fingers.

Two small spots of solder are applied to the Kovar ribbon by utilizing the ribbon as a resistance heater. The Kovar ribbon, previously fluxed in the desired spots, melts off small portions from 2 ribbons of solder which are fed across the Kovar ribbon.

The ribbon is then cut, formed and refluxed for soldering to the ends of the germanium bar. The *npn* bars are manually oriented and loaded into the magazine, but are fed, transferred and soldered to the leads automatically.

Flux residue is removed by a water rinse. An electrolytic etch removes about 0.005 inch from each face of the *npn* bar (0.025 x 0.025 x 0.125 inches). The etchant is 0.1 percent potassium hydroxide at 300 milliamperes constant current and



Solder application (right) and ribbon blanking stations (left)

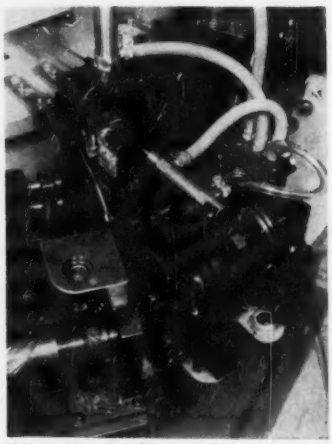

Other side of solder application station. Solder spools are at right of horizontal air cylinder



Lead fluxing, *npn* bar feed and rinse stations (right to left). Heated slides are below bar magazine



Header loading station. Header carrier is at top left

250 volts. Etching is followed by a rinse of ultrapure water (less than 0.4 microhms conductivity).

The test circuit which controls the operation of the header table measures the current passed by the photosensitive etched bar, under constant illumination. The current is proportional to alpha or gain.

Headers are processed on the 8-station table. An electromagnetic chuck inserts the headers into the carrying fixtures after picking them off a vibrating track. Modular spaced leads keep the headers oriented on the track. After the internal header leads are trimmed to length, a piece of solder-clad ribbon is fed, formed, welded to the header base lead and cut off.

Unless a defective bar-ribbon is detected by the test circuit, both subassemblies are joined together at the common weld station. The bar assembly is released by its carrying fingers and the transistor assembly retracts with the header carriage. Excess ribbon leads are trimmed off.

Considerations which led to the development of the machine and redesign of the transistor are reported in the July, 1958, Western Electric *Engineer*.

AIRPAX

DPDT CHOPPER

For DC INSTRUMENT AMPLIFIERS

See us at ISA Booth No. 142-144

Synchronous modulator — demodulator functions are performed in a single Type 600 DPDT chopper. Full wave demodulation permits high conversion efficiency.

Split reed construction with total contact isolation permits use in stabilized DC Instrument Amplifiers.

Airpax Type 600 operates from a 6.3 VOLT, 400 CPS source. Contact action is BBM. Permanently adjusted contacts insure long trouble-free life.

AIRPAX ELECTRONICS INCORPORATED

CAMBRIDGE DIVISION,

AIRPAX ELECTRONICS
INCORPORATED
JACKTOWN ROAD, CAMBRIDGE, MARYLAND

CIRCLE NO. 135 READER SERVICE CARD 135

On The Market



Transformer encapsulated

UNIVERSAL TOROID COIL WINDING, INC., 171 Coit St., Irvington 11, N. J., has developed a new low cost subminiature variable differential transformer for use as a displacement transducer. Among the features of the DT-401 are interchangeable cores, magnetic shielding and Teflon insulated leads for added strength. Overall length is 0.468 in.; finished o-d, 0.313 in. The unit shown guarantees a null of less than 100 μv with an input of 3 v at 400 cycles. Sensitivity is 2.7 mv/mil deflection with this input and linear range is $\pm$0.005 in.

CIRCLE NO. 300 READER SERVICE CARD

Standard Resistors and ratio sets

JULIE RESEARCH LABORATORIES, INC., 556 W. 168th St., New York 32, N. Y., has available a complete line of laboratory-standard resistors and ratio sets to 0.0015 percent absolute accuracy and 0.0005 percent relative (ratio) accuracy, with comparable stability. The NB-1 style oil-immersed, hermetically-sealed units have application in production gear, laboratory and field instruments, analog computer networks, and operational amplifier summing networks, as well as in laboratories as reference and calibration standards.

CIRCLE NO. 301 READER SERVICE CARD

Teflon Insulators feed-through type

FLUOROCARBON PRODUCTS INC., Camden 1, N. J., has introduced a versatile family of Teflon feed-through insulators especially designed for permanent and demountable applications. The permanent type, known as the Chemelec series CF-400 insulator, incorporates a hermetic solder seal. The semipermanent, or demountable seal, designated Chemelec series CF-414, utilizes silicone rubber "O" rings to establish seal between the insulator body and the bed plate and between the feed-through terminal and the insulator body.

CIRCLE NO. 302 READER SERVICE CARD



Tachometer highly sensitive

AIRPAX ELECTRONICS, INC., Seminole Division, Ft. Lauderdale, Fla. The new Tach-Pak makes possible the accurate measurement (0.25 percent) of the speed of any rotating, reciprocating or oscillating shaft or mechanism. The units require input signals no greater than 5 mv. Employing a magnetic pickup, no mechanical or electrical connection to the moving component is necessary. The 0 to 5 v output of standard Tach-Paks drives loads as high as 3,000 ohms. Output voltage is proportional to speed or rpm of the device measured.

CIRCLE NO. 303 READER SERVICE CARD

A-C Voltmeter transistorized

MOTOROLA COMMUNICATIONS & ELECTRONICS, INC., 4501 W. Augusta Blvd., Chicago 51, Ill. A new all-transistorized battery-operated a-c voltmeter provides laboratory performance and range combined with easy portability. It has full scale readings of 1 mv to 300 v in 12 ranges with an essentially flat frequency response of 20 cps to 1.5 mc. High input impedance of 10 megohms shunted by 15 $\mu\mu$f is provided in the 1-300 v range, and in-

WHY USE TWO?

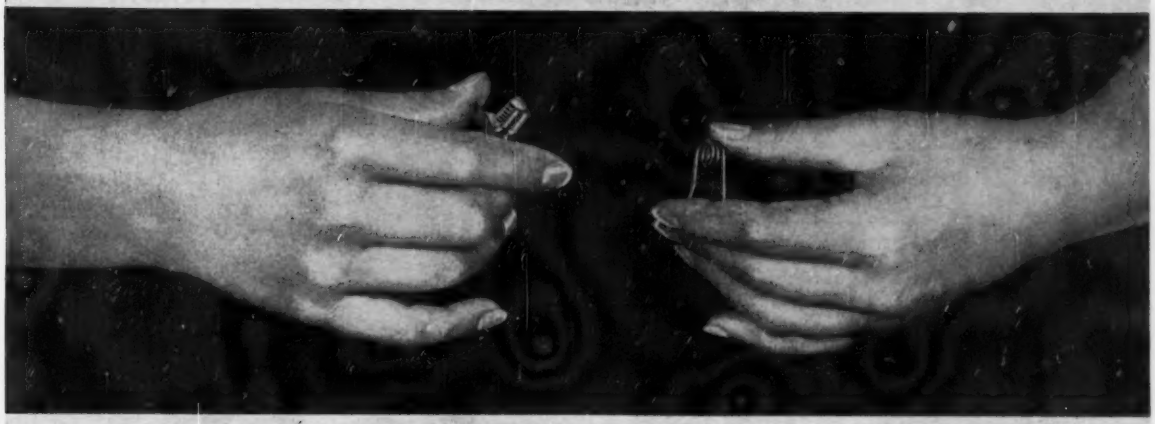

WHEN ONE JFD LC TUNER WILL DO!

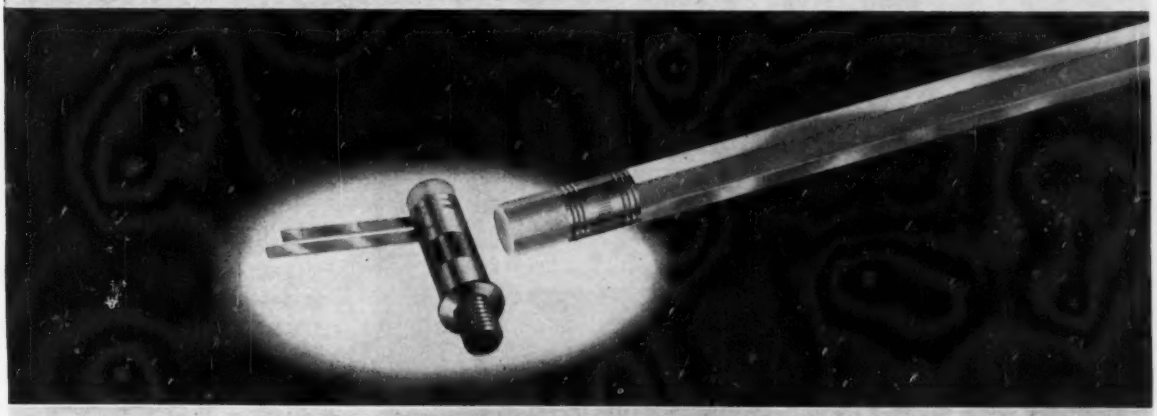

The versatile new JFD LC Tuner combines the characteristics of a precision variable capacitor and a metallized inductor. Its unique miniaturized construction helps effect compact electronic packaging to meet space challenging demands . . . affords higher reliability, faster assembly, and greater economy in prototype design or production.

A wide selection of 12 LC Tuners (in panel and printed circuit mounting types), each offering a large range of resonating frequencies, meet most circuitry requirements. If our standard line does not meet your needs, our engineering staff will be glad to design LC Tuners that suit your individual circuit specifications.

Typical LC Tuners Now Available

Model	Self Resonating Frequency Range	Length Above Panel	Diameter
LC303	450–700 MC	.635	5/16"
LC304	300–500 MC	.845	5/16"
LC306	200–450 MC	1.104	5/16"
LC309	125–200 MC	1.691	5/16"

Write for Bulletin 216 for further facts. Include your current design or performance problems for specific recommendations.

JFD

Pioneers in electronics since 1929

PHONE DEWEY 1-1000

ELECTRONICS CORPORATION

1462 62nd Street, Brooklyn, New York

JFD Canada Ltd.
51 McCormack St.
Toronto, Ontario, Canada

JFD International
15 Moore Street
New York, New York

CIRCLE NO. 137 READER SERVICE CARD

MEASURES VERY LOW FREQUENCY DOWN TO 0.05 cps

FREQUENCY RANGE
0.05 cps to 30 KC, down to 0.01 cps with corrections

VOLTAGE RANGE
0.02 to 200 volts Peak-to-Peak

ACCURACY
3% throughout all ranges and for any point on meter scale.

INPUT IMPEDANCE
10 megohms with average capacitance of 30 $\mu\mu$f.

RESPONSE
Peak-to-Peak.

FEATURES:

- Minimum pointer "Flutter" down to 0.05 cps.
- Reset switch for rapid measurements.
- Only one period of wave required for stable reading.
- Single logarithmic voltage scale and linear decibel scale.

Write for catalog for complete information

...or to 0.01 cps with corrections

BALLANTINE ELECTRONIC VOLTMETER
Model 316
Price: $290.

Manufacturers of precision Electronic Voltmeters, Voltage Calibrators, Capacitance Meters, DC-AC Inverters, Decade Amplifiers, and Accessories.

BALLANTINE LABORATORIES, INC. BOONTON NEW JERSEY

138 CIRCLE NO. 138 READER SERVICE CARD

put impedance of 1 megohm shunted by 25 $\mu\mu$f is provided in the 1-300 mv range. Accuracy is within ±5 percent up to 1 mc and the unit is useable as an indicator up to 5 mc.

CIRCLE NO. 304 READER SERVICE CARD

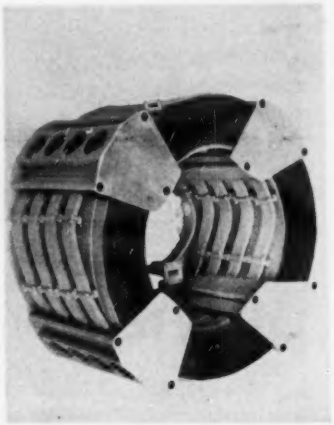

X-Band Delay Line
spiral waveguide

TURBO MACHINE CO., Lansdale, Pa. Cylindrical assemblies of spiral waveguide delay lines, in single coils up to 78 ft in length, and multiple interconnected systems of any length are now being built. Typical input vswr measurements of the compact, light weight and rugged units are less than 1.20 at any X-band frequency. Insertion loss is less than 0.1 db per ft of length. The X-band delay line is constructed from 1.000 in. by 0.300 in. o-d aluminum waveguide with brazed flanges.

CIRCLE NO. 305 READER SERVICE CARD



Decade Scalers
versatile units

HAMNER ELECTRONICS CO., INC., Princeton, N. J. The N-220 is a low-cost, fast-counting device using three in-line decades and a 4-digit electromechanical register. Time resolution is 1 μsec. Preset count is

CIRCLE NO. 139 READER SERVICE CARD→

recti/riter® systems offer you the widest recording ranges available

Versatile "recti/riter" recorders, both Single and Dual channel, have established new standards for *reading ease, full-scale accuracy,* and *up-front operator conveniences.* Now, the applicability of the "recti/riter," or other graphic recorders of one-milliampere sensitivity, is extended to the widest practical limits by the use of Series 300 accessories, which presently include models:

301 DC AMPLIFIER
350 MULTI-VOLTAGE MONITOR
351 AC MULTI-CURRENT MONITOR
352 LINE FREQUENCY MONITOR
353 LINE VOLTAGE MONITOR
354 LINE CURRENT MONITOR
333 LINE SERVICE MONITOR
(a single-package combination of 352, 353, and 354)

Only the "recti/riter" systems, recorders and matching accessories, offer these wide ranges for recording electrical parameters:

10 millivolts to 1000 volts . . .
500 microamperes to 1000 amperes . . .
Monitor standard frequencies—40, 60, 400 cps.

FULL SCALE RANGES—Accessory scales give quantities per division equal to decimal multiples or sub-multiples of 1, 2, and 5 in keeping with standard 50-division chart of recorders.

ACCURACY—Combined recorder-accessory response departs from true value at any point not more than 2 per cent of the full scale value.

POWER REQUIREMENTS—No auxiliary power required for transducer accessories . . . a 45-volt battery or optional AC supply is used with the DC Amplifier.

SIZE—Aluminum cases 2½" H., 7½" W., 10" D. (Monitors may be mounted inside as integral part of recorders.) Mountings are available for relay racks, flush mounting, portable, or desk use.

To select the "recti/riter" recorder-accessory system that meets your exact measurement requirements, let TI give you complete technical assistance . . . write or call today!

TEXAS INSTRUMENTS
INCORPORATED
GEOSCIENCES AND INSTRUMENTATION DIVISION
3609 BUFFALO SPEEDWAY • HOUSTON, TEXAS • CABLE: TEXINS

OTHER TI/IID PRODUCTS

- Complete Geophysical Instrumentation
- Measurement and Control Systems
- Automatic Test Equipment

When You Do It Yourself

start with

CHEMLON®

The Best In Teflon

It's a matter of good precaution—Getting the full advantages of this material depends largely on the processing ability of your supplier. He must meet *all* of these qualifications:

1 Fabricating experience, facilities and rigid quality control to supply a uniform, non-porous Teflon, free from any flaws, thus eliminating costly rejects or malfunction of your end product.

2 Dimensional accuracy—no matter what form you order, it should be carefully sized to industry specifications. Any waste of Teflon adds substantially to its cost, and corrective finishing in your own shop unnecessarily adds production time and expense.

Under the name, Chemlon, "John Crane" gives you full satisfaction on each of these points, plus engineering assistance on any problem you might have.

Contact "John Crane" about your specific needs. Also ask for Bulletins T-110 and T-122.

Crane Packing Co., 6402 Oakton Street, Morton Grove, Illinois, *(Chicago Suburb)*
In Canada: Crane Packing Co., Ltd., Hamilton, Ont.

*DuPont Trademark

CRANE PACKING COMPANY
OFFICES IN ALL PRINCIPAL CITIES

10, 100, 1,000. Accessories include l-f timer, plug-in r-f power supply and amplifier. Discriminator range is from −50 to +100 v with an alternate choice of low-level discrimination of from −10 to −0.25 v for G-M use, and increased sensitivity of 1 mv is available with the addition of a plug-in amplifier.

CIRCLE NO. 306 READER SERVICE CARD

Electric Counters
pulse grouping

PIC AUTOMATION CONTROLS DIV. of General Controls Co., 8070 McCormick Blvd., Skokie, Ill. Counting pairs, quads, and other group quantities without pulse divider circuits, is achieved by new pulse grouping electric counters. In operation, a pulse grouping counter designed to count pairs (one count for two pulses) for example, accumulates one pulse and then registers one unit count on the second pulse. Five number wheels are provided to register unit counts. A sixth number wheel can be arranged to register accumulated partial counts.

CIRCLE NO. 307 READER SERVICE CARD

Precision Resistors
variety of leads

ULTRONIX, INC., 111 E. 20th Ave., San Mateo, Calif. Special precision wirewound resistors with any specified temperature coefficient between −25 and +6,000 parts per million per deg C in

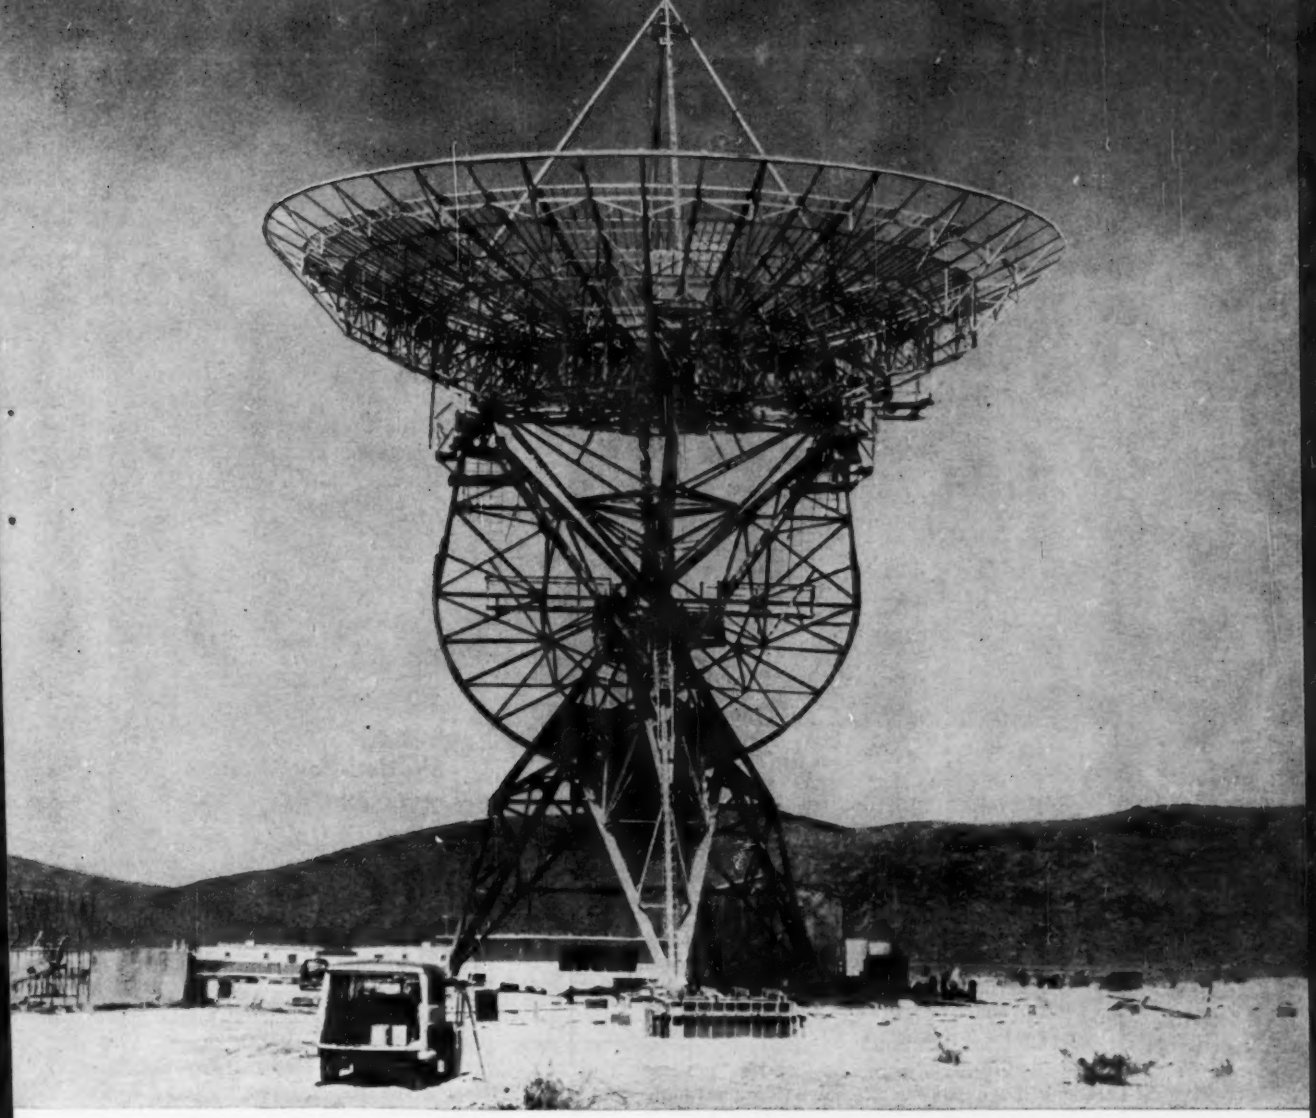

85′ diameter tracking antenna, shown under construction. Reflector face surface is fabricated from aluminum. Pedestal, Polar Cage, Declination Cage and back up structure are of galvanized steel.

New BLAW-KNOX 85′ diameter tracking antenna for U.S. Lunar Probe Project

This newest Blaw-Knox 85′ Tracking Antenna is part of the Space Probe Project of the Jet Propulsion Laboratory at Pasadena, Calif. It will be used to maintain communications with space vehicles at ranges up to 250,000 miles.

Its design is fully determinate. All structural members of the assembly are analyzed for stress and deflection before fabrication. Coupled with shop fabrication and field erection to rigidly accurate tolerances, it is capable of the highest gain, with a minimum of distortions or aberrations.

The entire drive system embodies such critical design requirements as infinitely variable movement with negligible creep or overrun for tracking. The slewing drives are capable of the extremely rapid acceleration and deceleration necessary to focus on targets.

Pioneering like this is the latest step in a long series of Blaw-Knox developments. Such milestones as the Guyed Vertical Radiator design in AM radio, the first radar antenna used to bounce signals off the moon, and the Tropospheric Scatter Antenna for over-the-horizon television have marked Blaw-Knox as a world leader in advanced design, fabrication and erection techniques.

Blaw-Knox welcomes the opportunity to translate your most advanced concepts into highly reliable operating equipment. Contact the Antenna Group.

Antennas—Rotating, Radio Telescopes, Radar, Tropospheric Scatter, and Ionospheric Scatter.

BLAW-KNOX

BLAW-KNOX COMPANY
Blaw-Knox Equipment Division
Pittsburgh 30, Pennsylvania

CIRCLE NO. 141 READER SERVICE CARD

Resumé:

Carroll, John M., (seated in photo) Lehigh University, BS, Hofstra College, MA in Physics, member several I.R.E. committees. Naval electronics, World War II. Electronics engineering officer during Korean war. Background in engineering derives from experience with the National Bureau of Standards, Naval Research Laboratories, Liberty Aircraft, American Instrument Co. Author of technical books for McGraw-Hill Book Company.

Present Occupation:

Jack Carroll is responsible for "getting-out-the-book" each week within the framework of editorial policy formed by W. W. MacDonald, Editor of **electronics.** Jack is occupied with editorial makeup, with the accuracy of editorial content, with scheduling the workload of a 26-editor staff to provide maximum coverage of technical developments and business information.

References:

Jack is a dedicated man—dedicated to the interests of the readers of **electronics** magazine. His prime goal is to help edit a publication which will be required reading for the important people in the electronics industry – a publication that will fill the needs of design-research, production, management. If you are not receiving the publication that is edited to keep you best informed, if you are not a subscriber, or if your subscription is expiring, fill in the box on the Reader Service Card. Easy to use. Postage is free.

electronics
A McGraw-Hill Publication
330 West 42nd Street, New York 36, New York

values of 10 ohms to 3 megohms are now available. They have application in telemetering, Zener diode and other circuits requiring positive temperature compensation. In bridge circuits high temperature coefficient resistors can be used to accurately measure temperature. Units are characterized by close tolerance and compression molding in an alkyd resin. They meet or exceed all applicable military specifications.

CIRCLE NO. 308 READER SERVICE CARD



Shaded-Pole Motor reversible

BARBER-COLMAN CO., Rockford, Ill., announces a reversible shaded-pole motor that fulfills the requirements of an a-c tachometer or rate generator. With rated a-c voltage applied to the main winding, a voltage is generated in the shaded windings which is proportional to the speed at which the rotor is driven. Voltage is nearly linear from 1,000 to 3,000 rpm. Generated voltage from a typical AYAE rate generator with low impedance shading coils (150 ohms) is 2 v per 1,000 rpm and can be increased to 10 v per 1,000 using shading coils of higher impedance.

CIRCLE NO. 309 READER SERVICE CARD

Rotary Switch multiposition

INDUSTRIAL DEVICES INC., 982 River Road, Edgewater, N. J., has developed a 12-position instrument-quality rotary switch with contact

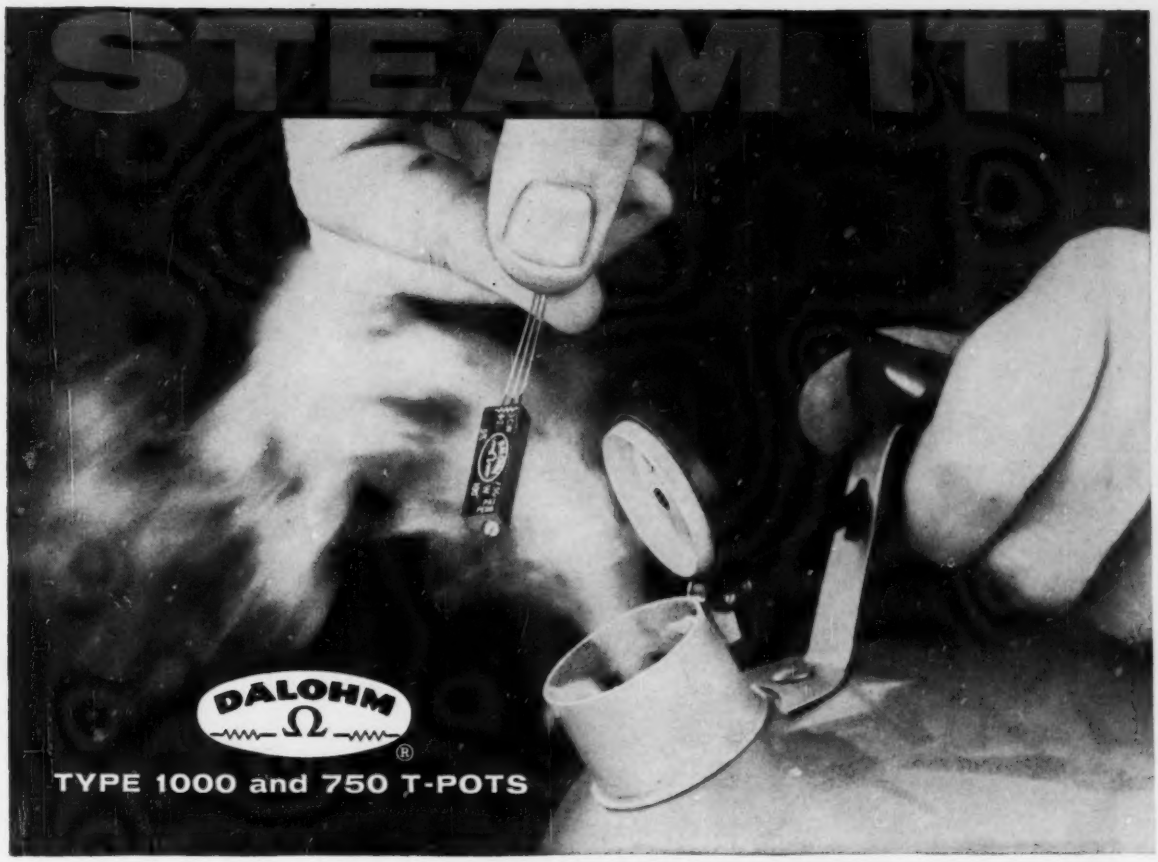

INHERENT STABILITY

Assured in a DALOHM 750 or 1000 Trimmer Potentiometer

The ability to perform reliably under extreme conditions of heat and humidity is only one mark of the inherent stability that is standard in Dalohm trimmer potentiometers.

Stored on the shelf for months . . . or placed under continuous load . . . operating in severe environmental, shock, vibration and humidity conditions . . . Dalohm precision trimmer potentiometers retain their stability because it has been "firmly infixed" by Dalohm design and methods of manufacture.

For all applications demanding trimmer potentiometers that meet or surpass MIL specifications, you can depend on Dalohm.

WIRE WOUND • SEALED • HIGH POWER • DALOHM TYPE 750 and 1000 TRIMMER POTENTIOMETERS

Miniature and standard sizes with completely sealed cases. Three terminal configurations provide the solutions for demanding design problems.

	750	1000
Rated at	...2 watts	2.5 watts
Resistance range	.....10 ohms to 30K ohms	10 ohms to 50K ohms
Standard tolerance	...± 5%	± 5%
Size	.....180" x .300" x 1.000"	.180" x .300" x 1.25"
Screw adjustment	..17 ± 2 revolutions	25 ± 2 revolutions
Weight	.....2 grams	2.5 grams

- Completely sealed
- Meets humidity requirements of MIL-STD-202A, Method 106A or MIL-E-5272A, Procedure 1
- End resistance is 3%, maximum
- Nominal resolution is from 0.1% to 1.2%
- Temperature coefficient is 50 PPM/° C.
- Meets load life requirements of MIL-R-19A
- Surpasses applicable paragraphs of MIL-R-12934A

Write for Bulletins R-41A and R-44, with handy cross-reference file cards.

SPECIAL PROBLEMS?

You can depend on DALOHM, too, for help in solving any special problem in the realm of development, engineering, design and production. Chances are you can find the answer in our standard line of precision resistors (wire wound, metal film and deposited carbon); trimmer potentiometers; resistor networks; collet-fitting knobs; and hysteresis motors. If not, just outline your specific situation.

from **DALOHM**
Better things in smaller packages
DALE PRODUCTS, INC.
1300 28th Ave., Columbus, Nebr.

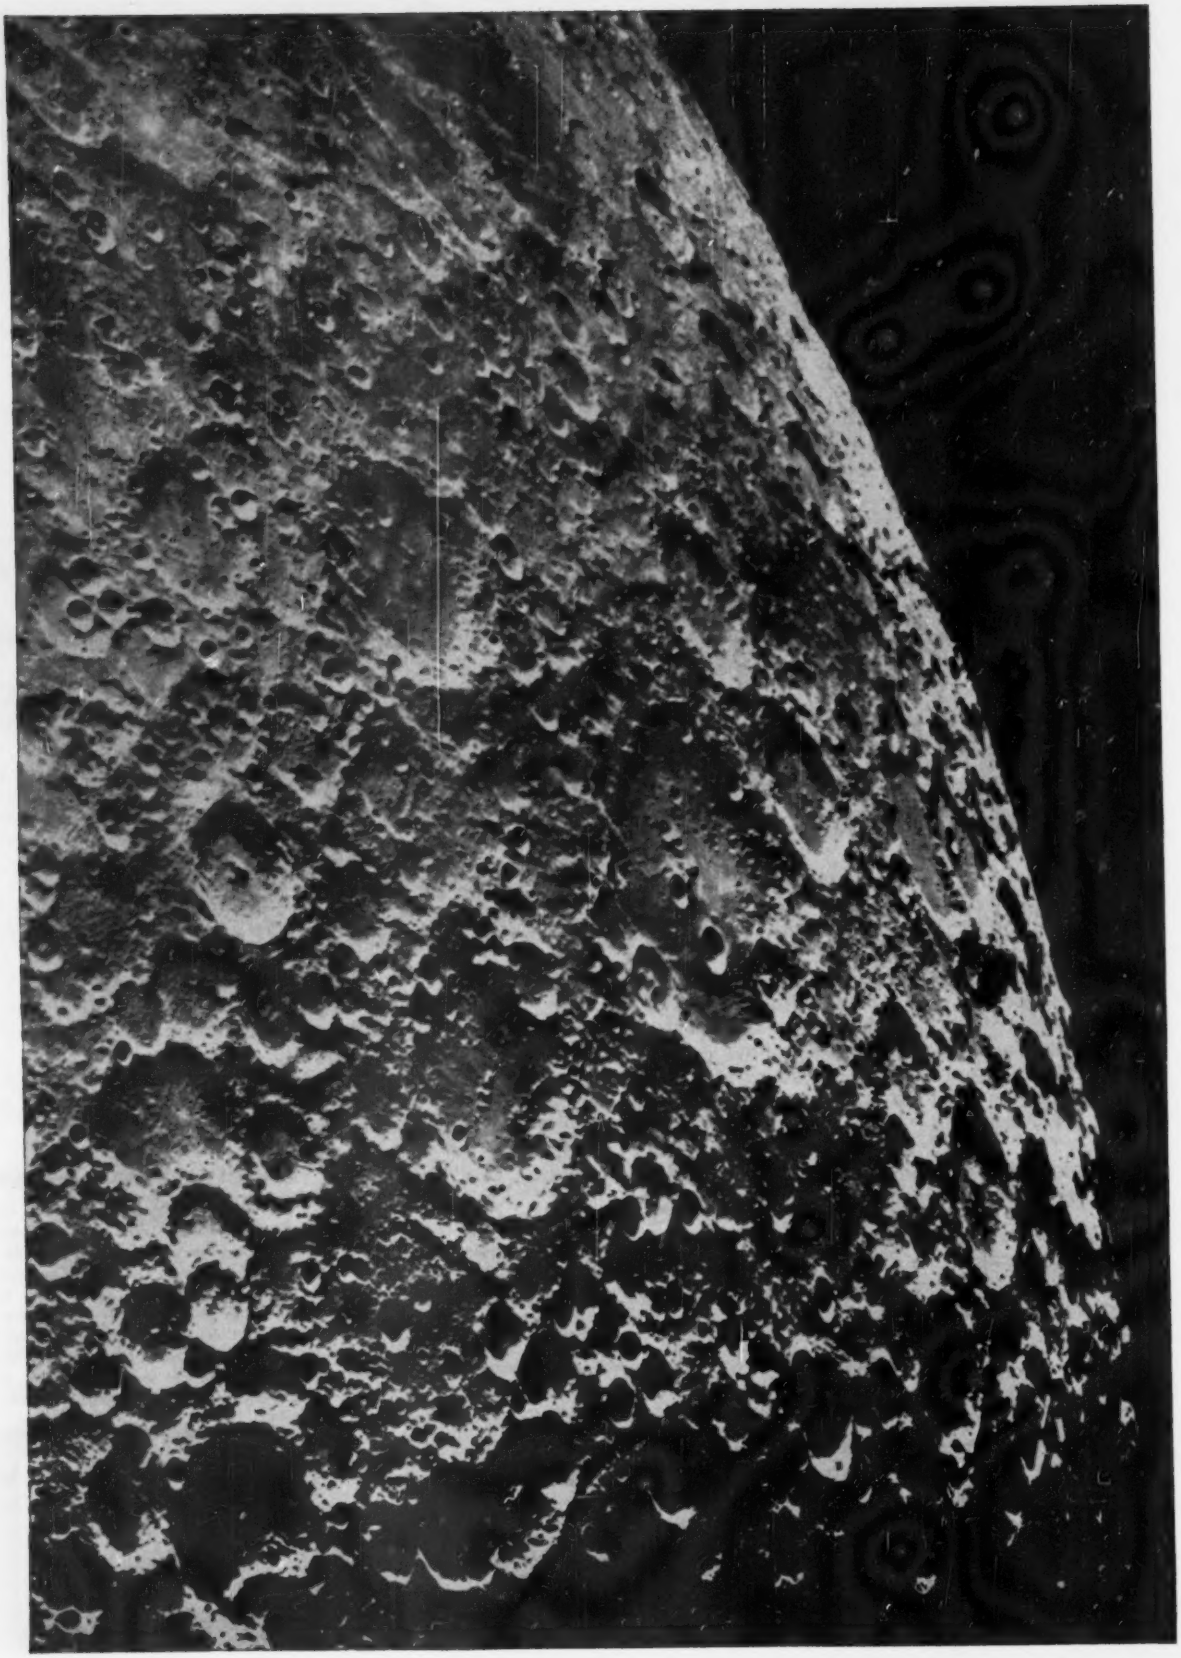

THE
MILITARY
REQUIREMENTS
FOR
MOON BASE

This is the title of one of four major space proposals developed by Martin for the military and astroscientific branches of our Government. The importance of this proposal is two-fold: the inevitability of an actual moon base program by this country within the next 5 years, and; the fact that we could and can undertake such a project now— not in theory but in "hard" engineering design. For Martin's eight divisions add up to one of the top capabilities in the free world for man's first ventures in space-planetary exploration.

MARTIN
BALTIMORE·DENVER·ORLANDO

resistance less than one milliohm. It is available in six models, one to six poles, offering a voltage breakdown rating of better than 1,000 v rms. It features a nylon detent and hardened beryllium copper detent spring to promote unusually smooth detent action for the full life of the switch. Switch has been designed for use exceeding 250,000 cycles of rotation, either continuous or limited as desired.

CIRCLE NO. 310 READER SERVICE CARD



Actuation System for missiles

BENDIX PRODUCTS DIVISION, Bendix Aviation Corp., South Bend 20, Ind. Missile aerodynamic surface actuation system includes two 3-position actuators, solid propellant and igniter. It eliminates gear train or levers since all differential action is obtained within actuators. Actuators can be designed for various loads and travel. System weighs 5 lb and exerts 50 in./lb surface force.

CIRCLE NO. 311 READER SERVICE CARD

Tiny Relay current sensitive

FILTORS, INC., 30 Sagamore Hill Drive, Port Washington, N. Y. S type current sensitive Powrmite relay meets shock tests of 100 g's for 11 millisec and vibration tests

SMALL WONDER

....EG&G's 1802 HYDROGEN THYRATRON Provides—

- *Compact*
- *Efficient*
- *Rugged*
- *Versatile*

BIG TUBE PERFORMANCE

EG&G's ceramic-metal hydrogen thyratron tube — 1/7th the volume of the 5948/1754 — enables extremely compact modulator design. The 1802 weighs but 2.07 pounds, with height of 5¾ inches and diameter 3⅜ inches.

The EG&G 1802 — designed to operate at high power levels, high repetition rates and high temperatures — can be mounted in any position.

It also features low cathode input power, low trigger drive requirements, fast warmup and low jitter. Rapid recovery allows operation at repetition rates above 50,000 pulses per second.

The 1802 has withstood 500g shock and 2000 cps vibration at 10g. Ceramic-metal construction permits envelope temperatures to 400°C, ambient temperatures to 125°C.

MIL-ACCEPTANCE TESTING:

Peak Anode Voltage (epy)	25KV
Peak Anode Current (ib)	1000 amps
Average Anode Current (Ib)	1.5 amps
RMS Current (irms)	40 amps
Pb Factor (epy x ib x prr)	20 x 10^9

Individual ratings can be exceeded by derating other conditions. Thus the EG&G 1802 has been operated at 30KV anode voltage, or at 2000 amperes anode current, or at a Pb factor of 50 x 10^9.

PRODUCTION QUANTITIES AVAILABLE

For additional technical data or other information, please write to:

EDGERTON, GERMESHAUSEN & GRIER, INC.

160 BROOKLINE AVENUE, BOSTON 15, MASS. • 1622 SOUTH "A" STREET, LAS VEGAS, NEV.

146 CIRCLE NO. 146 READER SERVICE CARD

of 10-55 cps at 0.06 double amplitude, 55-2,000 cps at 30 g's. Contact arrangement is 2 C (dpdt); ambient temperature range, −65 C to 125 C; dielectric test (at sea level), 1,000 v (750 v between open contacts); contact rating, 2 amperes resistive. Coil resistances from 185 to 10,000 ohms are available.

CIRCLE NO. 312 READER SERVICE CARD



Gear Motor three-speed

WESTERN GEAR CORP., 132 W. Colorado St., Pasadena, Calif., announces a 24 v d-c centrifugally governed controlled three-speed gear motor. The motor is rated at 0.1 hp at 1,920, 1,440 and 960 rpm with ±1 percent variation. It is a totally enclosed explosion proof motor designed for 500 hr life and built to meet the latest military specifications for camera and tape applications. It measures 6½ in. in length by 2⅝ in. in diameter.

CIRCLE NO. 313 READER SERVICE CARD

Single-Turn Pot subminiature

DAYSTROM PACIFIC, 9320 Lincoln Blvd., Los Angeles 45, Calif. Model 304 subminiature single-turn pot offers linearity to 0.3 percent and a 500,000-cycle life in a package that is only ½ in. in diameter and ⅝ in. in case length. This is said to be 25 percent to 40 percent smaller than previously available pots of comparable performance. Use of cylindrical mandrel,

The way to know – An ominous shadow over ocean or wasteland... an unidentified "blip" on a radar scope! A challenge from an airborne AN/APX-7 interrogating unit spurts into the ether. In microseconds a reply identifies the potential marauder as friendly. The absence of such a reply alerts the protective and retaliatory might of the nation.



ENGINEERING BEYOND THE EXPECTED
Packard Bell's reputation as a leading designer and foremost producer of IFF (identification, friend or foe) equipment is indicated by the fact that both the AN/APX-7 and the AN/APX-6, which returns the reply, are products of our Technical Products Division. Advanced development, company-sponsored, has recently produced miniaturized IFF modules which operate up to 200°C.

PACKARD BELL ELECTRONICS
Technical Products Division
12333 W. Olympic Blvd.
Los Angeles 64, Calif. • BR. 2-6141

C '59 PB

CIRCLE NO. 147 READER SERVICE CARD

IMPEDANCE: 1,000 MEGOHMS

Nothing gets past the Bradley line

1000 megohms is a powerful lot of resistance for a 6 amp rectifier. That's the reverse impedance of the Bradley REDTOP® silicon diode, and it's *1000 times* better than its nearest rival. But 1000 megohms is more than a rating—it's a symptom. You know how tricky it is to produce good semiconductor units. The fact that Bradley turns out stock rectifiers in volume with such ratings is a symptom of fastidious manufacturing practices. Leakage factors like 3 μamps and switching times like 2 μsecs are results of meticulous material processing and precision assembly in sealed chambers. The extra safety margin in our superior ratings is comfortable to have at critical points in today's tight-tolerance circuits, especially since Bradley diodes cost no more (often less) than the others.

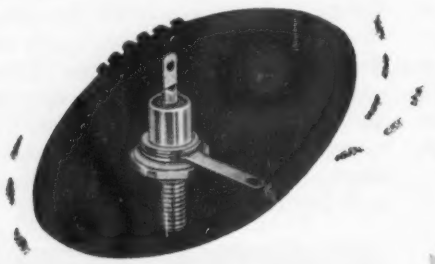

Send us your power specs. We will send you data on applicable diodes.

BRADLEY SEMICONDUCTOR CORPORATION
Formerly Bradley Laboratories Inc.

Bradley®

275 WELTON STREET, NEW HAVEN 11, CONNECTICUT

instead of the conventional card, permits a significant shortening of the case and more precise winding techniques. Environmental characteristics: 2.0 w at 50 C, operates to 125 C, withstands 20 g vibration and 30 g shock.

CIRCLE NO. 314 READER SERVICE CARD

Log Electrometer for reactor control

THE VICTOREEN INSTRUMENT CO., 5806 Hough Ave., Cleveland 3, Ohio, announces model LE-1 log electrometer for precision measurement of small currents over a wide dynamic range. It is particularly well suited for use as a reactor control instrument. In addition to being stable and reliable, the unit provides an inexpensive method of measuring 8 decades of current in the range of 10^{-5} to 10^{-13} amperes. Trip circuits can be incorporated on special order.

CIRCLE NO. 315 READER SERVICE CARD

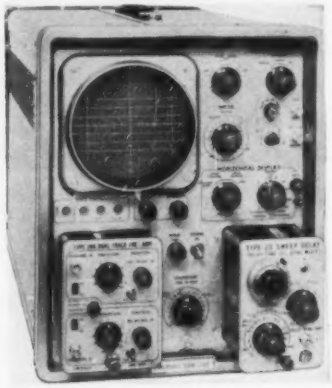

Oscilloscope wide-band

ELECTRONIC TUBE CORP., 1200 E. Mermaid Lane, Philadelphia 18, Pa. An accurate sweep delay with 18 calibrated ranges from 2 μsec to 1 sec per cm is available as an optional plug-in accessory in a single-channel oscilloscope. Model K-120

Improved performance plus production economies Your job... and Centralab's

with High Alumina Ceramic to Metal Precision Assemblies

Take full advantage of the superior electrical and physical properties of High Alumina and Steatite ceramics. Let CENTRALAB provide you with complete assemblies.

The specialized techniques of close tolerance ceramic-to-metal fabrication are daily routine at CENTRALAB. You can eliminate production assembly problems and at the same time achieve superior products by relying on years of expert knowledge and unequalled facilities for engineering ceramics.

CENTRALAB can handle intricate, precision assemblies involving machining of ceramics or metals to ±.00025, metalizing of ceramics, cementing, riveting, soldering, plating, and stamping. Such assemblies are regularly produced in their entirety—from raw stock—in the CENTRALAB plant.

Write for your free copy of CENTRALAB'S Ceramic Design Handbook giving your detailed design data and complete electrical and physical specifications on High Alumina and Steatite ceramics.

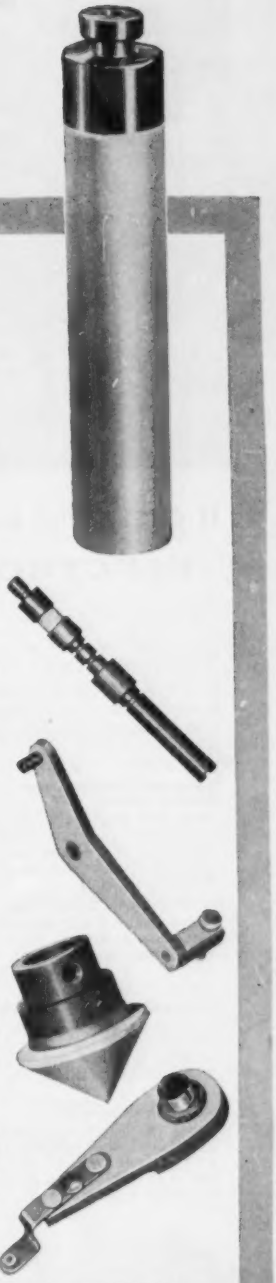

PUMP PLUNGER
Length 11⅞", diameter ground to .0002" Total Indicator Reading. Surface finish of 10 micro-inches. Stainless steel epoxy bonded to high alumina. Similar units up to 18" long and 4" diameter can be made.

VARIABLE CONDENSER SHAFT
Precision 95% High Alumina shaft and silver plated brass hardware assembled and machined to a Total Indicator Reading requirement of less than .002".

TUNER COUPLING ARM
To hold center dimensions between riveted brass pivot and cemented phosphor bronze bushing, bushing is machined to a tolerance of ±.0005" or less. O-ring groove on pivot machined to .012" wide, —.000" + .002". Machined ceramic screw.

NON-FLOATING VALVE SEAT
Comprised of ceramic cone with surface finish of 3-5 helium light bands brazed to machined and copper plated bushing. After assembly, Total Indicator Reading of ceramic cone is less than .005".

CONTACT ROTOR ASSEMBLY
With riveted and soldered contact arm. Nickel plated brass bushing soldered to metalized ceramic. Tolerance —.000" + .001". on I.D. of bushing after slotting.

Centralab
X-5967

A Division of Globe-Union Inc.
9141 E. KEEFE AVE. • MILWAUKEE 1, WIS.
In Canada: 804 Mt. Pleasant Rd., Toronto 12, Ont.

VARIABLE RESISTORS • ELECTRONIC SWITCHES • PACKAGED ELECTRONIC CIRCUITS • CERAMIC CAPACITORS • ENGINEERED CERAMICS

It costs less to **RENT AN**

ELECTRONICS LABORATORY

than to buy one

You can save costly investment in laboratory equipment and staff... and still get top-quality R/D services... by using the complete product testing and evaluation facilities of United States Testing Company. Since 1880 thousands of clients in all industries have used our services to get:

Improved Product-Design Through Testing

Our test engineers will set up an evaluation program that "locks in" with each step of your product development from design to prototype to finished product.

An Independent Laboratory

We present a completely objective, unbiased approach to your design evaluation problems. All reports to clients are impartial, factual and confidential.

Economical Handling of Peak Loads

We are equipped to take over your peak loads *immediately* at a fraction of what it would cost your company to maintain a staff of the necessary calibre.

Product Qualification

Tests run by United States Testing Company are recognized by military and government procurement agencies in placing a product on the Qualified Product list.

Facilities and Services

Electronic Laboratory—evaluates electronic components and systems in communications and industrial fields; includes automated facilities for low-cost collection of reliability data.

Environmental Laboratory—simulates high-low temperatures, humidity, altitude, immersion, salt spray, sand and dust, rain, fungus, vibration, shock, acceleration, etc.

Materials Testing Laboratory—conducts tension, compression and transverse tests on metals, ceramics, plastics, rubber and wood materials; spectographic analysis and X-ray also available.

Mechanical Laboratory—evaluates mechanical, electro-mechanical hydraulic and pneumatic devices.

Chemical Laboratory—covers all fields including physical and biological chemistry; also infrared spectrophotometry.

Send for your free copy of bulletin 5801 describing our complete services and facilities.

The World's Most Diversified Independent Laboratory.

United States Testing Co., Inc.

1415 Park Avenue, Hoboken, N. J.

Branch Laboratories BOSTON • BROWNSVILLE • DALLAS • DENVER • LOS ANGELES MEMPHIS • NEW YORK • PHILADELPHIA • PROVIDENCE • TULSA

150 CIRCLE NO. 150 READER SERVICE CARD

oscilloscope includes features such as a wide-band vertical amplifier with 0.017 μsec rise time, sweep lock-out, beam position indicators, single knob calibrator and sweep controls, and others that simplify operation and waveform analysis. Unit is a general purpose laboratory instrument for fast circuit work in pulse applications such as radar, guidance systems, and nuclear work.

CIRCLE NO. 316 READER SERVICE CARD



R-F Transformers wide-band

NORTH HILLS ELECTRIC CO., INC., 402 Sagamore Ave., Mineola, N. Y. Two types of r-f transformers are available in a hermetically sealed package 1¼ by 1⅛ by 1¼ in. Type 1211A covers 200 kc to 40 mc; 1211B, 3 to 100 mc. Impedance ratio is 600 ohms to 75 ohms. Applications include antenna matching, receiver and low power transmitter coupling, and pulse circuits.

CIRCLE NO. 317 READER SERVICE CARD

Signal Sampler for coax systems

T.E.M., INC., 71 Okner Parkway, Livingston, N. J., announces a group of signal samplers for monitoring the signals present in co-

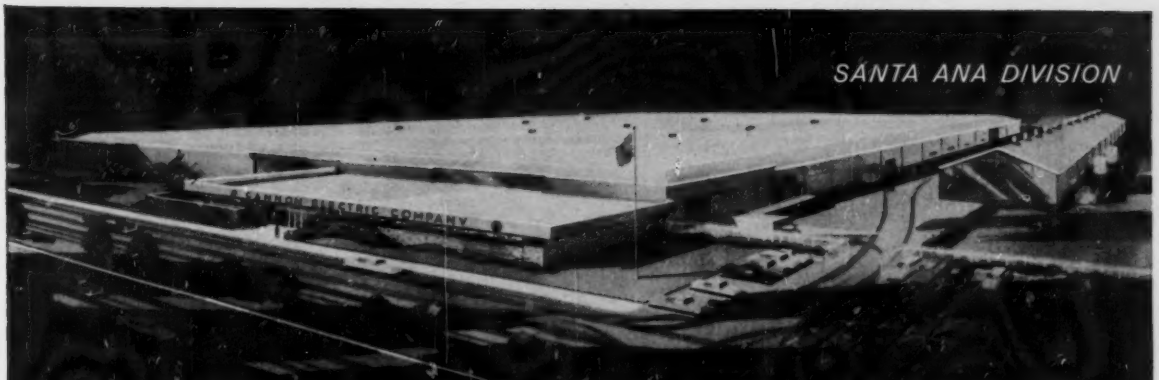

Increased Production Facilities for Cannon MS Series Plugs

MODERN PRODUCTION FACILITIES — The new modern Cannon factory building in Santa Ana has over 110,000 square feet of floor space, equipped with the latest automatic and semi-automatic processes. This increased production capability has been organized especially for the production of the Cannon MS line of plugs.

QUALITY CONTROL — The Santa Ana Division utilizes the most modern methods of quality control to insure conformance to MIL-Q-5923, MIL-C-5015, and related specifications as presented in the latest QPL Lists.

SPECIAL ENGINEERING A complete engineering staff is maintained at Santa Ana to handle all special modification requirements on the MS Series, and to serve customers with unusual needs.

FASTER DELIVERY — This new facility further increases the ability of Cannon Electric Company to provide fast deliveries of Cannon Plugs, without sacrificing quality or reliability.

STOCKED BY DISTRIBUTORS — Cannon Distributors, located throughout the country, stock the standard types of MS Plugs and can arrange for immediate shipment.

NEW MS-R SERIES
All Cannon MS Series Plugs conform to Military Specification MIL-C-5015D (ASG)

CLASS R — environmental resisting (Lightweight) Cannon Plugs are a new addition to the MS Line. Class R Plugs are intended for use where the plug will be subject to heavy condensation, rapid changes in temperature or pressure, and to high vibrations.

Cannon is the only qualified source for the complete line of the new Class MS-R Plugs. MIL-C-5015D specifies that Class R Plugs shall have the "wire sealing grommets in firm contact against the rear face of the insert." This requirement, now written into the specification, has always been a Cannon design criterion for all MS environmental resistant designs.

MS — MS-A, MS-B, MS-E

■ 260 Shell Styles ■ Lightweight ■ 1 to 100 Contacts ■ 15 different Diameters

All Cannon MS Plugs Conform to Military Specification MIL-C-5015D (ASG)

OTHER MS PLUGS AVAILABLE FROM CANNON

MINIATURES • POWER • RACK/PANEL • BATTERY • PRINTED CIRCUIT • MS ACCESSORIES • MS MODIFICATIONS TO MEET SPECIAL NEEDS

For further information write for the new MS-R Catalog, MS Nomenclature Guide, and Catalog on MS Insert Arrangements to:

CANNON ELECTRIC COMPANY —
3208 Humbolt Street, Los Angeles, California • Please refer to Dept. 120

LARGEST FACILITIES IN THE WORLD FOR RESEARCH-DEVELOPMENT-MANUFACTURE

CANNON PLUGS

Factories in Los Angeles, Santa Ana, Salem, Toronto, London, Paris, Melbourne and Tokyo. Distributors and Representatives in the principal cities of the world.

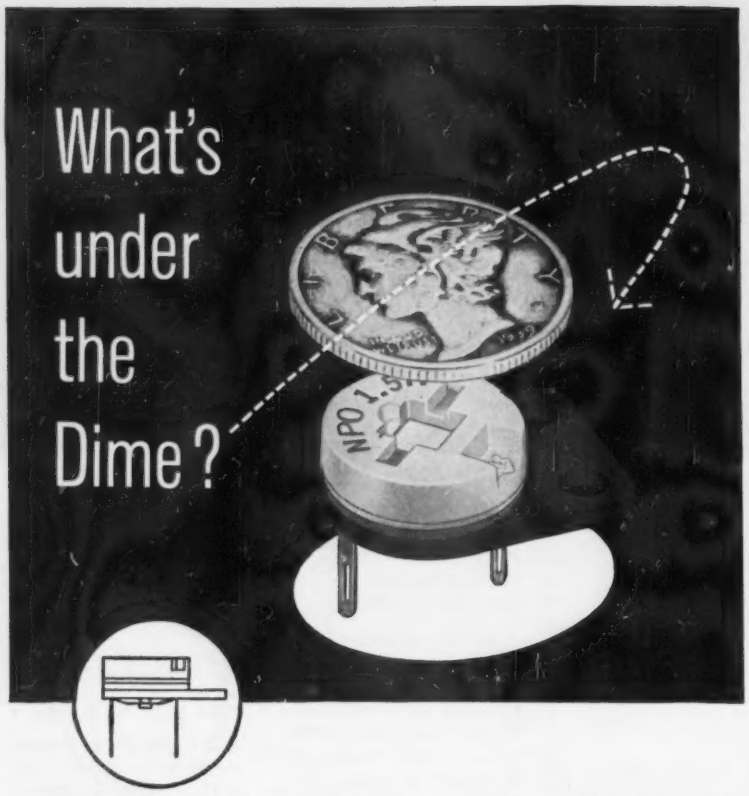

THIS ERIE 557 CERAMICON® TRIMMER

with excellent stability and high max/min ratio

Within a dime's diameter, ERIE 557 Ceramicon® Trimmers exceed MIL-C-81 specifications for stability. The ½"-diameter ceramic rotor is lapped and silvered to mate with a lapped and silvered stator for dependable capacitance control throughout thousands of hours service. Easy to adjust, yet will not drift off setting.

ERIE 557 Trimmers are designed for compact assembly to chassis or multiple-mountings to a base strip.

Made in a wide range of capacities to cover temperature coefficients from NPO through N5200. Tested for 250 hours at twice rated voltage in 85°C ambient.

Let us send specification literature describing ERIE 557 Ceramicon Trimmers, in standard and special types and capacities. Address:

ERIE ELECTRONICS DIVISION
ERIE RESISTOR CORPORATION
Dept. A — Erie, Pennsylvania

axial systems. They consist of a section of 50-ohm transmission line, fitted at either end with type N, BNC, TNC, C or HN fittings and with an additional arm added at the center. In this arm is mounted a probe, either loop or electrostatic, whose insertion depth can be adjusted to provide a coupling variation range of at least 60 db. Thus, a means is provided for taking from a coaxial line a small amount of signal for monitoring, coupling wavemeters, etc., without adding any appreciable discontinuity to the line.

CIRCLE NO. 318 READER SERVICE CARD

Diode Tester extended range

TELETRONICS LABORATORY, INC., 54 Kinkel St., Westbury, L. I., N. Y. Model MA-259 millimicroammeter (at right in rack adapter) has been developed to extend the range of the model DT-257 diode tester from 50 μa to 0.01 μa to measure the low reverse current characteristics of silicon diodes. Used as a millimicroammeter the instrument covers the range from 0.01 μa to 1,000 μa and is completely self contained and battery powered.

CIRCLE NO. 319 READER SERVICE CARD



Tape Reader transistorized

FERRANTI ELECTRIC INC., 95 Madison Ave., Hempstead, L. I., N. Y. Type TR5 fully transistorized, self-contained photoelectric tape reader operates at any speed up to 330 characters/sec and stops on the stop

CIRCLE NO. 152 READER SERVICE CARD
CIRCLE NO. 153 READER SERVICE CARD→

An achievement in defense electronics

HALF CUBIC INCH 90 DB AMPLIFIERS FEATURE NEW CERAMIC TRANSFORMERS

New 455 kc three-stage amplifiers developed by the U.S. Army Signal Corps utilizing the facilities and competence of General Electric provide as much as 90 db gain with 5 kc bandwidth in a volume of one-half cubic inch. This degree of miniaturization evolved from sustained research and development in solid state filters, delay lines and transformers at the Electronics Laboratory, Electronics Park.

The unique bar-shaped transformers developed for these amplifiers, combined with improvements in existing ferro-electric ceramics, permits the most compact packaging with extreme gain. This achievement in research and development is indicative of General Electric's technical competence in defense electronics. 227-2

Progress Is Our Most Important Product

GENERAL ELECTRIC

Defense Electronics Division
Heavy Military Electronics Department
Syracuse, New York

117 DIFFERENT EQUIPMENTS

Marconi

for Electronic Measurement

Marconi Instruments market 117 different equipments of importance to electronic engineers, from voltmeters to test equipment for guided missile projects and multi-channel links. Representative of the types of equipment that American industry has relied on for many years, the three Marconi instruments above are outstanding for quality and the advanced nature of their designs. Altogether, the range of equipments provided is an impressive guide to the achievements of Marconi Instruments in every essential branch of instrumentation.

STANDARD SIGNAL GENERATOR
Model 867

FREQUENCY RANGE: 15 kc to 30 mc on 15-ft high-discrimination full-vision scale.
CRYSTAL ACCURACY: 0.01% with built-in 1-mc harmonic source.
OUTPUT RANGE: 4 μv to 4 volts at 75 ohms. 0.4 μv to 0.4 volt at 13 ohms. Automatic level control for good stability.
AMPLITUDE MODULATION: Monitored and variable up to 100%; high quality assured by envelope negative feedback. Modulation frequencies, 400 and 1,000 cps. Less than 200 c/s spurious FM.

F.M. SIGNAL GENERATOR
Model 1066A

FREQUENCY RANGE: 10 to 470 mc, on fundamentals throughout. 0.0025% short-term stability.
DIRECT-READING INCREMENTAL TUNING: Stepped control up to ± 15 kc; continuously variable from 0 to 20 and 0 to 100 kc.
OUTPUT RANGE: 0.2 μv to 200 mv at 50 ohms.
MODULATION: FM deviation continuously variable and monitored from 0 to 20 and 0 to 100 kc. Also AM up to 40%. Modulation frequencies, 1 and 5 kc.



CARRIER DEVIATION METER
Model 791D

MEASURES DEVIATION: 200 cps to 125 kc in four ranges; measures down to 10 cps using external readout.
CARRIER FREQUENCY RANGE: 4 to 1,024 mc, directly calibrated.
MODULATION FREQUENCY RANGE: 50 cps to 35 kc.
CRYSTAL LOCKING: ensures freedom from microphony, allows measurement of FM hum and noise in VHF and UHF communication and broadcast transmitters.

MARCONI INSTRUMENTS

AM & FM SIGNAL GENERATORS
AUDIO & VIDEO OSCILLATORS
FREQUENCY METERS
VOLTMETERS · POWER METERS
DISTORTION METERS
FIELD STRENGTH METERS
TRANSMISSION MONITORS
DEVIATION METERS
OSCILLOSCOPES, SPECTRUM & RESPONSE ANALYSERS
Q METERS & BRIDGES

111 CEDAR LANE · ENGLEWOOD · NEW JERSEY Tel: LOwell 7-0607
Canada: Canadian Marconi Co. Marconi Building, 2442 Trenton Ave. Montreal 16.
MARCONI INSTRUMENTS LTD · ST. ALBANS · HERTS · ENGLAND

TC 147

character. It accepts 5, 7 or 8 hole tape widths, provision being made for reading all tracks. Simple adjustment of a slide instantly adapts the reader for the required width of tape. Where spooling is required, the type A11 spooler can be used for either feed or take-up or both at any rate on demand by the reader.

CIRCLE NO. 320 READER SERVICE CARD



Precision Pot rugged, long-lived

NEW ENGLAND INSTRUMENT CO., 320 Main St., Woonsocket, R. I. Model 55 wirewound pot has been vibration-tested for up to 24 g at 500 cps, and up to 10 g at 1,000 cps, and is available in servo-mounting packaging or standard bushing mount. Maximum resistance is 100,000 ohms, with a tolerance of ±5 percent on standard units or ±1 percent on special types. The pot is rated at 2 w at 65 C and will operate over an ambient temperature range of −55 C to +105 C for the standard design. Insulation resistance is 100,000 megohms for standard units.

CIRCLE NO. 321 READER SERVICE CARD



Analyzer gages thickness

DELSEN CORP., 719 W. Broadway, Glendale 4, Calif. The successful adaptation of the D-K analyzer as a gage for nonmetallic thickness

AlSiMag® 243

. . . for LOW LOSS . . . for HERMETIC SEALING

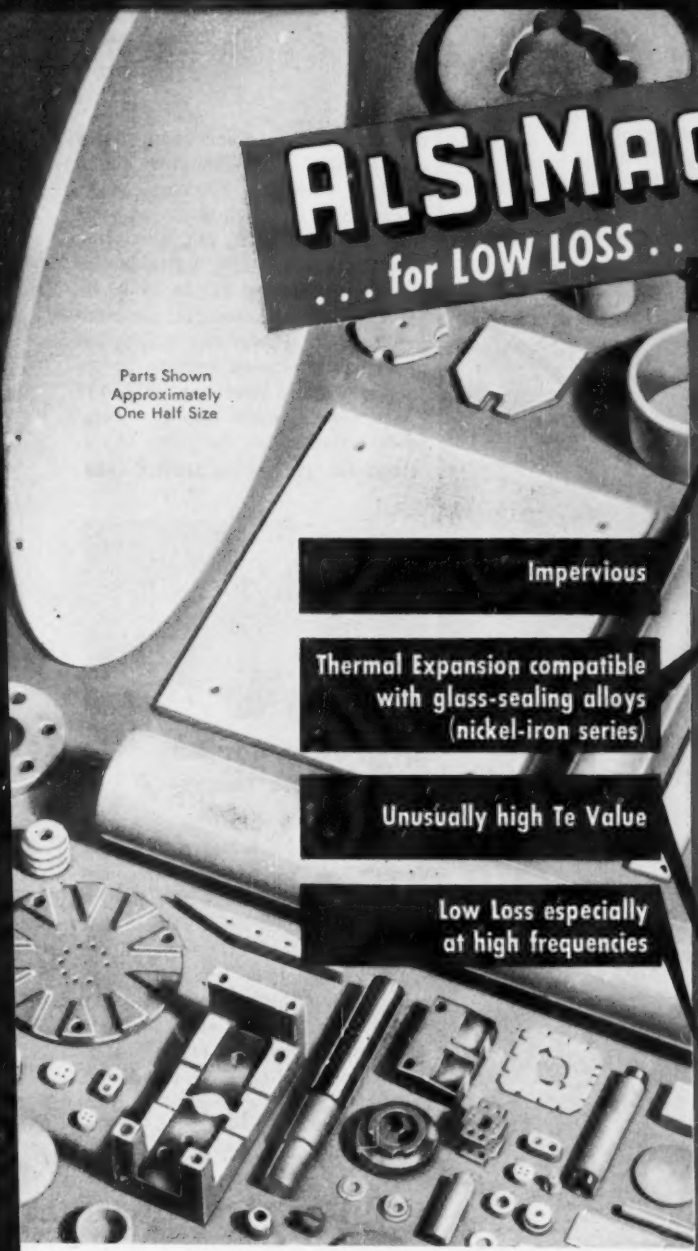

Parts Shown Approximately One Half Size

Impervious

Thermal Expansion compatible with glass-sealing alloys (nickel-iron series)

Unusually high Te Value

Low Loss especially at high frequencies

Note These Advantageous Properties

PROPERTY	UNIT	AlSiMag 243
Water Absorption	%	0 to .02 Impervious
Specific Gravity	———	2.8
Density	Lbs. per cu. in.	.101
Standard Body Colors[a]	———	Buff
Softening Temperature	°C. °F.	1 440 2 624
Safe Temperature at Continuous Heat	°C. °F.	1 000 1 832
Hardness	Mohs' Scale[b]	7.5
Thermal Expansion Linear Coefficient	Per °C. 25-300°C. 25-700°C.	10.0×10^{-6} 11.2×10^{-6}
Tensile Strength	Lbs. per sq. in.	10 000
Compressive Strength	Lbs. per sq. in.	85 000
Flexural Strength	Lbs. per sq. in.	20 000
Resistance to Impact (½" rod)	Inch-Lbs.	4.0
Thermal Conductivity[c] (Approximate Values)	g. cal. x cm. thick / cm^2 x sec. x deg. C.	.008
Dielectric Strength (step 60 cycles) Test discs ¼" thick	Volts per mil	240
Volume Resistivity at Various Temperatures: 25°C.	Ohms per centimeter cube	$>10^{14}$
100°C.		5.0×10^{13}
300°C.		7.0×10^{11}
500°C.		1.2×10^{10}
700°C.		1.0×10^{8}
900°C.		3.0×10^{6}
Te Value[d]	°C. °F.	>1 000 >1 832
Dielectric Constant[e]: 60 Cycles	———	6.3
1 MC.		6.2
100 MC.		6.1
10,000 MC.		5.8
Power Factor[e]: 60 Cycles	———	.0014
1 MC.		.0004
100 MC.		.0003
10,000 MC.		.0010
Loss Factor[e]: 60 Cycles	———	.009
1 MC.		.002
100 MC.		.002
10,000 MC.		.0058

The low loss, Te value and thermal expansion characteristics of Forsterite ceramics are not equalled by any other impervious ceramic. This is especially important when high frequencies or sealing to metals or glasses is involved.

These properties have created a steadily increasing demand for AlSiMag 243. In the past two years major improvements have been made on this material and its fabrication. We are now producing components formerly unattainable in this material and the number of applications is constantly increasing.

If your application requires the favorable characteristics of AlSiMag 243, why not send us your blue prints and outline your operating conditions? If it is possible that your requirements can be met, we will be glad to work with you at reasonable cost on prototypes for your practical tests. Test discs approximately 1/2" x 3/32" are available with our compliments.

A Subsidiary of Minnesota Mining and Manufacturing Company

AMERICAN LAVA CORPORATION

CHATTANOOGA 5, TENN.
58TH YEAR OF CERAMIC LEADERSHIP

For service, contact American Lava representatives in Offices of Minnesota Mining & Manufacturing Co. in these cities (see your local telephone directory): Boston: Newton Center, Mass. • Chicago: Bedford Park, Ill. • Cleveland, O. • Dallas, Texas • Los Angeles, Cal. New York: Ridgefield, N. J. • Philadelphia, Pa. • St. Louis, Mo. • St. Paul, Minn. • So. San Francisco, Cal. • Seattle, Wash.
All other export: Minnesota Mining & Manufacturing Co., International Division, 99 Park Ave., New York, N. Y.

He's discovered the cable that'll do the trick!

It's Hickory Brand Microphone Cable!

- EXTRA LIMP
- LONG FLEX LIFE
- LOW CAPACITANCE
- HIGH TENSILE STRENGTH

These plastic-insulated cables with non-marking jackets are lightweight, weatherproof and highly resistant to abrasion.

Use Hickory Brand Microphone Cables for all stage and studio work. Excellent for audience-participation programs. Use also for outdoor extensions.

All Hickory Brand Electronic Wires and Cables are quality-engineered and precision manufactured to meet the most exacting requirements.

HICKORY BRAND

Write for complete information on the full line of

HICKORY BRAND Electronic Wires and Cables

Manufactured by

SUPERIOR CABLE CORPORATION, Hickory, North Carolina

3604

measurements has uncovered major applications. It is currently being used to scan and determine electrical flaws in insulating materials for missile, aircraft, and insulation manufacturers. The portable instrument measures 12½ in. by 9½ in. by 10½ in., and weighs approximately 15 lb. Power can be supplied by either a plug-in battery power supply or by an interchangeable 115 v a-c bench power supply. Total power dissipation is only 15 w.

CIRCLE NO. 322 READER SERVICE CARD



Low Power Contacts for multipole relays

WARD LEONARD ELECTRIC CO., 115 MacQuesten Parkway South, Mt. Vernon, N. Y., has available low power contacts for its new line of type HR multipole relays. Low power contacts are engineered for use in exceptionally low power (low voltage, in milliamperes) circuitry where high electrical and mechanical reliability are vital. Interchangeable with standard double break contacts, the low power (palladium alloy) contacts are totally enclosed by individual molded hoods supplying protection against accumulations of foreign particles.

CIRCLE NO. 323 READER SERVICE CARD



Flutter Meter sensitive device

AMPLIFIER CORP. OF AMERICA, 398 Broadway, New York 13, N. Y. The new flutter meter is designed to fill the need for a sensitive, rapid and accurate method of visual indication of wow and flutter content of

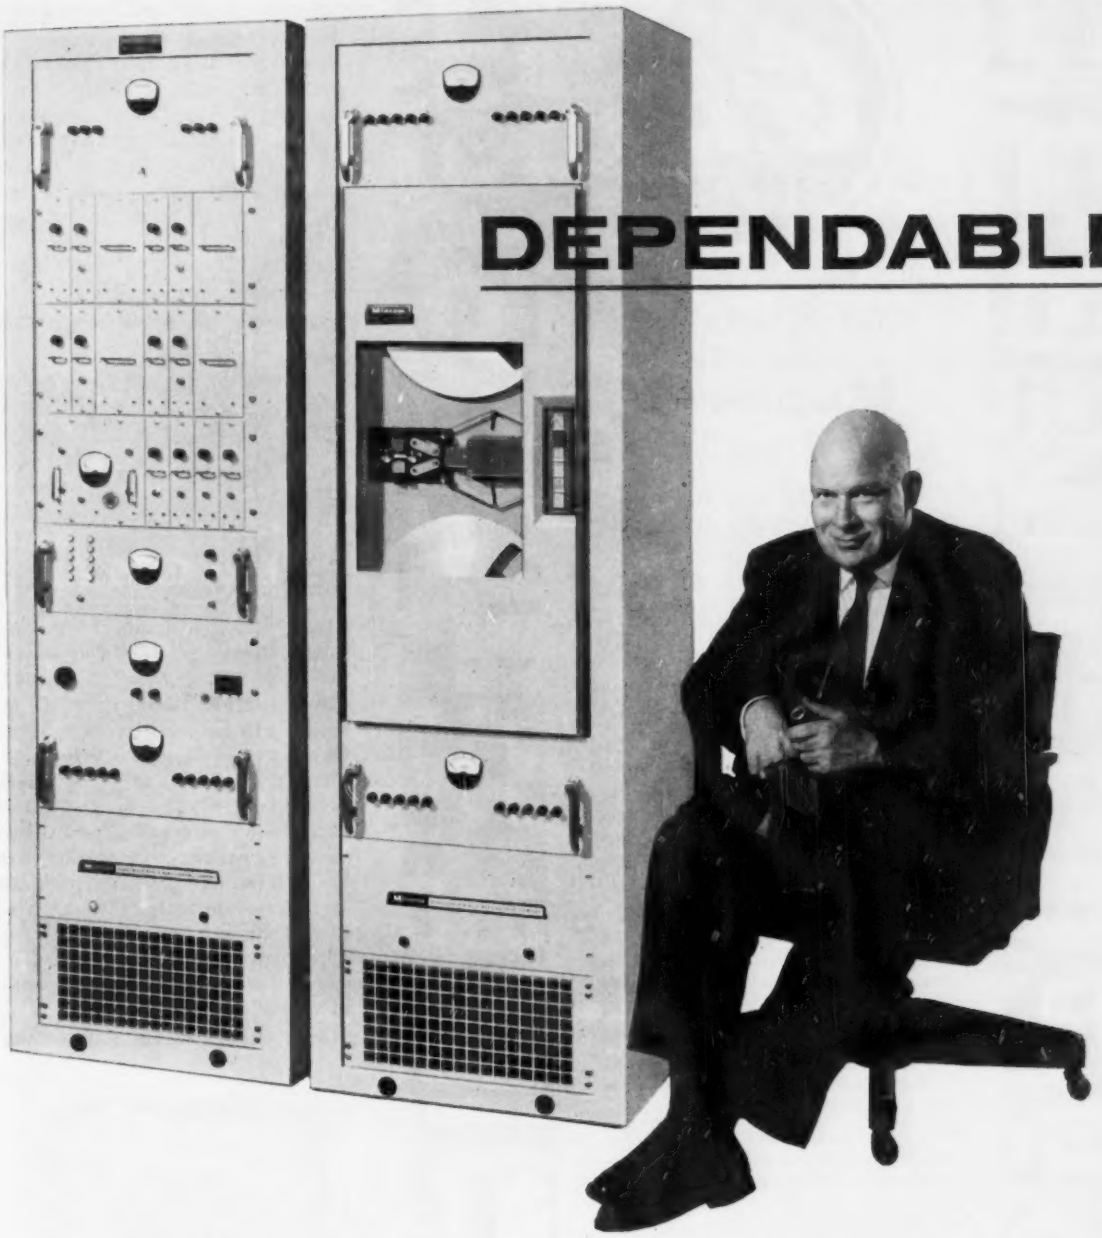

DEPENDABLE

Dependable is the word for the new Mincom Model CV-100 Video Band Magnetic Tape Recorder Reproducer. Only 12 moving parts, four simple adjustments. No mechanical brakes. Seven 1-megacycle video channels on a single half-inch tape. Tape speed of 120 ips, coupled with specialized circuitry, produces a reliable frequency response from 400 cycles to 1.0 megacycle (each track). Signal-to-noise ratio: 30 db, peak signal to rms noise. All plug-in assemblies, carefree maintenance. Interested? Write Mincom today for specifications.

3M COMPANY ... WHERE RESEARCH IS THE KEY TO TOMORROW

MINCOM DIVISION MINNESOTA MINING AND MANUFACTURING COMPANY

2049 SOUTH BARRINGTON AVENUE • LOS ANGELES 25, CALIFORNIA

now available from G-L . . .

HIGH PERMEABILITY
nickel alloy
Magnetic Laminations

plus the QUALITY, UNIFORMITY and SERVICE that have made G-L TAPE WOUND CORES a standard in the industry

High permeability magnetic laminations, made to the most exacting standards in the industry, can now be obtained from G-L.

Transformer Laminations have the superior characteristics and uniformity-of-product associated with G-L magnetic tape wound cores. Controlled production techniques, careful selection of material, expert tooling and precision stamping assure you of the highest quality.

Magnetic Head Laminations are the result of improvements made by G-L on normal processing techniques to provide laminations with minimum burrs, improved stacking factors, reduced head dimensions.

Special Shapes are available from G-L for special applications. Our own tool and die shop is set up to do rapid prototype work.

Your inquiries are invited. Write, wire or call. Send us prints on your current requirements for an immediate quotation. Our illustrated magnetic laminations folder, TB-104, will be mailed upon request.

G-L ELECTRONICS
2921 Admiral Wilson Blvd., Camden 5, N. J.
Phone WOodlawn 6-2780
Teletype TWX 761, Camden, New Jersey
See you at the Magnetic Amplifier Show, Washington, D. C. Booth 19

all types of tape recorders and playback equipment including 33⅓, 45 and 78 rpm disks and 16 and 35 mm sound film mechanisms. A built-in preamplifier and input attenuator will accept voltages ranging from 1 mv to 100 v. Connection may be made directly across magnetic tape playback heads, or across high-level circuits delivering up to 100 v. A built-in 3,000 cycle oscillator is incorporated for recording purposes.

CIRCLE NO. 324 READER SERVICE CARD

Drum Head
low inductances

GENERAL TRANSISTOR WESTERN CORP., 6110 Venice Blvd., Los Angeles 34, Calif. Model MHDM-35-328 miniature drum head is designed for installation where many tracks are required or where a large number of recirculating registers are necessary. The heads can be mounted so that the gaps of two adjacent heads are only 0.150 apart circumferentially, making the head ideal for close recirculating registers. Heads are low inductance for efficient transistor driving. Diameter of the head is only 0.216 with an overall length of 1.062.

CIRCLE NO. 325 READER SERVICE CARD



Electrical Drives
variable speed

APPLIED TECHNOLOGY CORP., 475 Fifth Ave., New York 17, N. Y. Model SC-31 series covers the 1/50 to ¾ hp range. These electrical drives use no tubes, have wide speed ranges with stepless adjustment from zero to full speed; and utilize

FOR RADAR AND
MISSILE TRACKING

ANOTHER VARIAN FIRST

INTERNAL CAVITY PULSE AMPLIFIER
KLYSTRON with 75 KILOWATTS
average output

- RUGGED
- NON CRITICAL
- HIGH PERFORMANCE
- SINGLE PUSH-BUTTON OPERATION

1.25 MEGAWATTS PEAK POWER

Varian's VA-848 is the world's largest internal cavity Klystron. It produces the tremendously high average power of 75 kilowatts for long pulse radar and missile tracking. Features include a pulse duration time of 2000 microseconds; tunable frequency range of 400 to 480 megacycles; 45 db stable RF power gain.

Varian makes a wide variety of Klystrons and Wave Tubes for use in Radar, Communications, Test and Instrumentation, and for Severe Environmental Service Applications. Over 100 are described and pictured in our new catalog. Write for your copy – address Tube Division.

VARIAN associates
PALO ALTO 1, CALIFORNIA
Representatives throughout the world

KLYSTRONS, TRAVELING WAVE TUBES, BACKWARD WAVE OSCILLATORS, HIGH VACUUM PUMPS, LINEAR ACCELERATORS, MICROWAVE SYSTEM COMPONENTS, R. F. SPECTROMETERS, MAGNETS, MAGNETOMETERS, STALOS, POWER AMPLIFIERS, GRAPHIC RECORDERS, RESEARCH AND DEVELOPMENT SERVICES

Make Royal your source for Coaxial Cables. Modern, integrated production facilities here meet the many and diverse demands of the electronics industry. Look to Royal for single and multi-conductor cables with built-in performance dependability. Request Bulletin 4C-3-L listing stock constructions, or let us quote on your special requirements.

ROYAL COAXIAL CABLES

• Formerly manufactured by Federal Telephone & Radio Company

ROYAL ELECTRIC CORPORATION
301 Saratoga Avenue
PAWTUCKET • RHODE ISLAND

ROYAL ELECTRIC ...an associate of

circuit breakers for armature protection. The remote control is small, light and compact. Its sturdy construction utilizes components rated well in excess of normal operation for maximum dependability.

CIRCLE NO. 326 READER SERVICE CARD

Power Supplies modular type

NYT ELECTRONICS, INC., 2979 Ontario St., Burbank, Calif., announces a line of extremely well regulated power supplies designed as modules for original equipment. Compact and efficient, the units mount like a component in small spaces, on conventional chassis cutouts. A wide choice of overlapping current and voltage ranges is furnished in 16 models—from 125 v at 50 ma to 425 v at 400 ma. Regulation for the entire line is 0.05 percent. Ripple is less than 1 mv rms, and transient response less than 25 μsec.

CIRCLE NO. 327 READER SERVICE CARD

Capacitors photoflash type

ILLINOIS CONDENSER CO., 1616 N. Throop St., Chicago 22, Ill., announces a new series of smaller case dimension photoflash capacitors for energy storage, welding, time delay, high current filtering, etc. They have guaranteed low leakage (no greater than 1 ma) at full rated working voltage. They also feature

for immediate delivery of

General Instrument semiconductors

at factory prices

call your stocking distributor

The authorized distributors listed below carry a full stock of all General Instrument semiconductors — and can give you immediate delivery from stock.

SILICON RECTIFIERS
TRI-AMP RECTIFIERS
SELENIUM RECTIFIERS
SILICON DIODES
GERMANIUM DIODES

GI

CALIFORNIA
Valley Electronic Supply Co.
1302 W. Magnolia Blvd., Burbank
Shanks & Wright, Inc.
2045 Kettner Blvd., San Diego
Pacific Wholesale Co.
1850 Mission St., San Francisco

DISTRICT OF COLUMBIA
Silberne Industrial Sales Corp.
3400 Georgia Ave., NW

ILLINOIS
Merquip Company
5904 W. Roosevelt Rd., Chicago

INDIANA
Brown Electronics, Inc.
1032 Broadway, Fort Wayne
Graham Electronics Supply, Inc.
122 S. Senate Ave., Indianapolis

MARYLAND
D & H Distributing Co.
2025 Worcester St., Baltimore

MASSACHUSETTS
The Greene Shaw Co., Inc.
341-347 Watertown St., Newton

NEW YORK
Hudson Radio & TV Corp.
37 W. 65th St., NYC
Sun Radio & Electronics Co., Inc.
650 Sixth Ave., NYC

OHIO
The Mytronic Company
2145 Florence Ave., Cincinnati
Pioneer Electronic Supply Co.
2115 Prospect Ave., Cleveland
Buckeye Electronic Distributors, Inc.
236-246 E. Long St., Columbus

OKLAHOMA
Oil Capitol Electronics
708 S. Sheridan, P.O. Box 5423, Tulsa

PENNSYLVANIA
D & H Distributing Co.
2535 N. 7th St., Harrisburg
Herbach & Rademan, Inc.
1204 Arch St., Philadelphia

WASHINGTON
Seattle Radio Supply Co.
2115 Second Ave., Seattle

WISCONSIN
Radio Parts Co., Inc.
1314 N. 7th St., Milwaukee

GENERAL INSTRUMENT SEMICONDUCTOR DIVISION

JAN TYPE RADIO RECEPTOR SILICON DIODES

IN457
IN458
IN459

When JAN type diodes are required, you can be certain that General Instrument's engineering skills and manufacturing facilities will enable us to deliver them at prices that reflect years of volume production experience.

The Radio Receptor line of silicon *and* germanium diodes is the most complete available to the industry — with the widest possible range of characteristics. You'll find them at authorized distributors across the country. Complete information and data sheets are available upon request.

Code No.	Min. Fwd. DC Cur. @ +1V	Max. Rev. DC Cur. @ Test V. 25° C.	150° C.	Test Voltage	Max. Inv. Voltage	Min. Breakdown Voltage*	Avg. Fwd. DC Cur. (Max.)
1N457	20 mA	.025 μA	5 μA	60V	60V	70V	75 mA
1N458	7 mA	.025 μA	5 μA	125V	125V	150V	55 mA
1N459	3 mA	.025 μA	5 μA	175V	175V	200V	40 mA

*Reverse voltage at which a reverse current of 100 uA flows.
All ratings and characteristics are at 25° C. unless otherwise noted.
Operating temperature range −80° C. to +200° C.

Semiconductor Division
GENERAL INSTRUMENT CORPORATION
65 Gouverneur Street, Newark 4, N. J.

GENERAL INSTRUMENT CORPORATION INCLUDES F. W. SICKLES DIVISION, AUTOMATIC MANUFACTURING DIVISION, RADIO RECEPTOR COMPANY, INC. AND MICAMOLD ELECTRONICS MANUFACTURING CORPORATION (SUBSIDIARIES)

GENERAL INSTRUMENT DISTRIBUTORS: Baltimore: D & H Distributing Co. • Chicago: Merquip Co. • Cleveland: Pioneer Electronic Supply • Los Angeles: Valley Electronics Supply Co., Burbank • Milwaukee: Radio Parts Co., Inc. • New York City: Hudson Radio & Television Corp., Sun Radio & Electronic Co. • Philadelphia: Herbach & Rademan, Inc. • San Diego: Shanks & Wright Inc. • San Francisco: Pacific Wholesale Co. • Seattle: Seattle Radio Supply • Tulsa: Oil Capitol Electronics

Shallcross BRIDGES

Types 6100 and 6101



Type 6320



Type 638-R

617 Series



Type 6350

ACCURATE dc RESISTANCE MEASUREMENTS

. . . 1 micro-ohm to 10^6 megohms

Among the many bridges manufactured by Shallcross, these six have become virtually "standards" for general-purpose resistance measurements. Each is easy to operate and ruggedly constructed to maintain accuracy and stability in every kind of field and laboratory service. Switch decks are inside the case for minimum maintenance.

Of special interest are the 617 Series Limit Bridges. These provide direct "GO-NO GO" production line resistor testing for any percent tolerance spread from ±0.1% to ±20%.

NEW BULLETIN L-19B contains full specifications for each instrument. For your copy write to: SHALLCROSS MANUFACTURING COMPANY, 2 Preston Street, Selma, North Carolina.

Model Number	Measurement Accuracy	Maximum Setting	Minimum Setting	Circuit	Special Features
6100	±0.1% +0.01Ω (.1Ω to 1.011 MegΩ)	1.011 MegΩ	0.001Ω	Fault Location—Wheatstone	Fault Location by Murray, Varley, Hilborn & Fisher Loop Tests.
6101	±0.1% +0.01Ω (1Ω to 11.11 MegΩ)	11.11 MegΩ	0.001Ω	Wheatstone	Four dial rheostat usable as decade box.
6320	±0.02% +0.01Ω (1Ω to 11.11 MegΩ)	111.11 MegΩ	0.00001Ω	Wheatstone	Most accurate five dial Shallcross bridge for direct resistance measurement.
	±0.05% to ±20% on separate "+" and "—" percent selectors. (1Ω to 10 MegΩ)	11.111 MegΩ	0.0001Ω	Percent Limit	Rapid "GO-NO GO" percent limit testing. Built-in adjustable comparison standard.
638-R	±0.75% or better (.001Ω to 1Ω)	11.11Ω	0.000001Ω	Kelvin	Overlapping Kelvin and Wheatstone ranges selected with single ratio dial.
	±0.2% +0.01Ω (1Ω to 11.11 MegΩ)	11.11 MegΩ	.001Ω	Wheatstone	
6350	±1%, (10Ω to 10 MegΩ) ±2%, (10 MegΩ to 10,000 MegΩ) ±5%, (above 10,000 MegΩ)	1.111 x 10^9 MegΩ	0.01Ω	Wheatstone with d-c Amplifier	Modular construction dual range power supply, null indicator-amplifier, for 115V. 60 cycle operation.
617 Series	±0.1% to ±20% on separate "+" and "—" selectors from a minimum resistance consistent with number of dials in use to the maximum settings.	111,111Ω 1,111,110Ω 11,111,100Ω	0.1Ω *1Ω 10Ω	Percent Limit	For rapid "GO-NO GO" percent limit testing. Hand or foot operated for production testing. All models also usable for direct resistance measurements. Binding post for external d-c power supply.
	†±0.2% +0.01Ω from a minimum consistent with number of dials in use to the maximum setting.	111,111Ω 1,111,110Ω 11,111,100Ω	0.1Ω *1Ω 10Ω	Wheatstone	

† Except 617B and 617J ±0.1% ±0.01Ω. * Except 617G, 0.01Ω.

excellent shelf life, are designed for minimum inductance, and allow greater discharge currents with more useful watt seconds available. Units may be stacked for space savings.

CIRCLE NO. 328 READER SERVICE CARD



Cardiac Monitor transistorized

MEDTRONIC INC., 818 19th Ave. N.E., Minneapolis 18, Minn. A new cardiac monitor provides both visual and audible indications of: the ventricular "R" wave from external chest electrodes; the ventricular "R" wave through internal heart wires or, the Medtronic Pacemaker pulse, passing through the patient's heart, indicating a complete circuit. Instrument is fully transistorized and quite sensitive (½ mv). It is operated by self-contained batteries and does not present interference problems.

CIRCLE NO. 329 READER SERVICE CARD

Coax Terminations d-c to 3,000 mc

STODDART AIRCRAFT RADIO CO., INC., 6644 Santa Monica Blvd., Hollywood 38, Calif., has improved a line of coaxial line terminations to permit proper function of the units within temperature extremes of −450 F to +440 F. Resistive elements of these units are made of thin platinum films fired at high

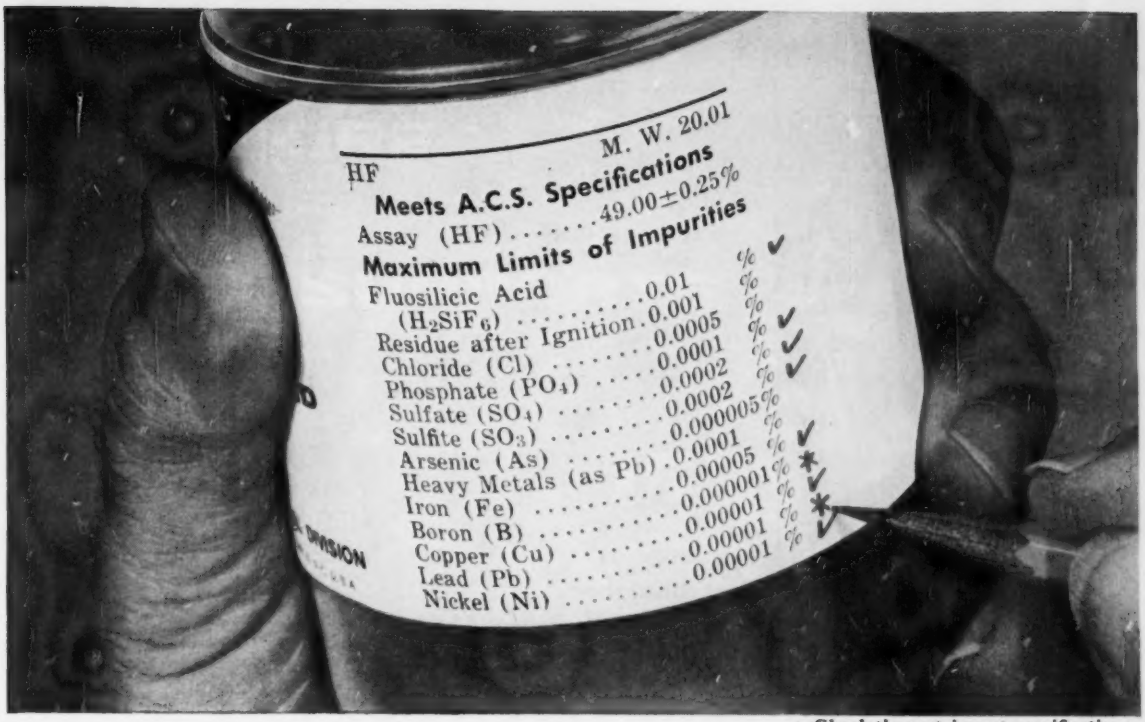
HF
M. W. 20.01
Meets A.C.S. Specifications
Assay (HF) ..... 49.00±0.25%
Maximum Limits of Impurities
Fluosilicic Acid (H_2SiF_6) ..... 0.01 %
Residue after Ignition ..... 0.001 %
Chloride (Cl) ..... 0.0005 %
Phosphate (PO_4) ..... 0.0001 %
Sulfate (SO_4) ..... 0.0002 %
Sulfite (SO_3) ..... 0.0002 %
Arsenic (As) 0.000005%
Heavy Metals (as Pb) ..... 0.0001 %
Iron (Fe) 0.00005%
Boron (B) 0.000001%
Copper (Cu) ..... 0.00001 %
Lead (Pb) ..... 0.00001 %
Nickel (Ni) ..... 0.00001 %

✓*Check these stringent specifications.*
* *Now added for the first time*

BAKER & ADAMSON® ANNOUNCES

HIGHEST PURITY YET FOR "ELECTRONIC GRADE" *HF*

For years, Baker & Adamson's "Electronic Grade" Hydrofluoric Acid has been the purest available. Now, to serve electronic requirements even better, this high purity has been still further improved.

Utilizing the most advanced production techniques and quality control methods, B&A is now making its "Electronic Grade" HF Acid to meet stringent new specifications in which impurities are held to the lowest levels ever attained. In addition, maximum limits for boron and lead have been established and are included for the first time . . . enabling still further control of impurities. Result: B&A "Electronic Grade" Hydrofluoric Acid offers greater reliability in critical etching operations . . . helps reduce rejects and improves quality control in the production of semiconductors.

These new ultra pure specifications for "Electronic Grade" HF point up Baker & Adamson's continued leadership in supplying high purity production chemicals for the electronic industry. B&A "Electronic Grade" Hydrofluoric Acid is available in 1 lb. plastic bottle, 10 lb. returnable plastic jug, 10 lb. nonreturnable polyethylene bottle, and 6½ gal. polyethylene carboy. Remember . . . for the finest in electronic chemicals—specify B&A!

Quality specifications have also been improved for B&A Reagent Hydrofluoric Acid, 48% A.C.S. The new reagent grade promises greater reliability in research . . . fewer variables in laboratory control work . . . better analytical control . . . more reproducible results.

BAKER & ADAMSON®
"Electronic Grade" Chemicals

Allied Chemical

GENERAL CHEMICAL DIVISION
40 Rector Street, New York 6, N. Y.

ADAPTABLE FOR ALL APPLICATIONS

Hoyt Panel Meters

NEW! Matching AC and DC Meters in striking configuration of gleaming, transparent polystyrene modernize all panels. Interchangeable with 3½" diameter meters, ruggedly built, 2% accuracy, full-width scales in all popular ranges. HOYT No. 1035 DC and No. 1036 AC.

Be sure of the highest accuracy, dependability, and readability — *plus* economy — with HOYT precision electrical instruments. Moving coil, rectifier, and repulsion types available in a wide variety of sizes, ranges, cases, and colors—many with parallax-free, mirror scales . . . the *complete* line of matched AC and DC Panel Meters for original equipment or replacement use. Also, custom-designed to your most exacting specifications.

Write for fully illustrated literature containing descriptions, engineering data, and low prices.

Write to Export Manager regarding world-wide availability for Electronic, Industrial, and Automotive applications.

Hoyt SINCE 1904

ELECTRICAL INSTRUMENTS

BURTON-ROGERS COMPANY
Sales Division
42 Carleton St., Cambridge 42, Mass., U.S.A.

temperatures on ceramic forms and treated with a protective coating of silicone varnish. These elements do not become superconductors at temperatures at least as low as 4.2 deg Kelvin. Units' vswr is less than 1.2 to 3,000 mc and average power dissipation is 1 w.

CIRCLE NO. 330 READER SERVICE CARD



Test Chamber self-contained

CONRAD, INC., 141 Jefferson St., Holland, Mich. The Chemosphere test chamber model FHV-27-5-5 is designed for high altitude testing in the Centigrade range between 100,000 ft and 260,000 ft altitude. A major feature is that the chamber combines altitude with temperature and vibration and permits the vibration machine to be coupled through a bellows arrangement permitting test items within the chamber being bolted directly to the vibration machine table. Standard temperature range is +300 F to −100 F. Altitude can be simulated up to 200,000 ft in 20 minutes; 50,000 ft altitude can be attained at the rate of climb equal to 25,000 ft per minute.

CIRCLE NO. 331 READER SERVICE CARD



Resistors vitreous enamel

TRU-OHM PRODUCTS, 2800 N. Milwaukee Ave., Chicago 18, Ill., announces its new fixed wire wound vitreous enameled resistors, now available in 3 w, 5 w, 10 w and 20 w

No solvent residue

...with new Freon* solvents

In degreasing of sensitive mechanical and electrical assemblies, "Freon" solvents by Du Pont evaporate completely —leave no deposit. "Freon" solvents are high-purity chemicals, and because no inhibitors are needed to keep "Freon" solvents neutral, no residue is left on parts as they dry. "Freon" solvents can be recovered and reused without adding inhibitors.

Here are four more reasons why new "Freon" solvents are extraordinarily safe for cleaning delicate parts and assemblies.

- **Low toxicity**—"Freon" solvents are odorless and much less toxic than ordinary solvents. Vapors won't cause nausea or headaches.
- **Won't burn or explode**—Underwriters' Laboratories report "Freon" solvents nonexplosive, noncombustible and nonflammable.
- **Noncorrosive**—"Freon" solvents remain neutral through repeated degreasing use without the need of inhibitors.
- **Negligible effects on plastics, elastomers, insulation and color coding**—"Freon" solvents remove oil and grease with minimum swelling of plastics or rubber and without crazing or softening paint, wire coatings or insulation.

Write for free solvents booklet. E. I. du Pont de Nemours & Co. (Inc.), "Freon" Products Division 529, Wilmington 98, Delaware.

**Freon is Du Pont's registered trademark for its fluorinated hydrocarbon solvents.*

FREE BOOKLET! No obligation — write for booklet which tells how new "Freon" solvents by Du Pont minimize cleaning hazards.

DU PONT
REG. U.S. PAT. OFF.
Better Things for Better Living ... through Chemistry

CIRCLE NO. 133 READER SERVICE CARD
CIRCLE NO. 165 READER SERVICE CARD →

SYNTHETIC SAPPHIRE FOR HELIX SUPPORTS

The bifilar helix and electron gun structure of this backward wave oscillator tube are supported by sapphire rods. The tube was developed and built at the Electronics Research Laboratory, Stanford University, and operates from 500 to 1000 megacycles at 100 watts.

Single crystal synthetic sapphire rods are being used as support members for TWT helices and electron gun structures.

Sapphire offers flexural strength at elevated temperatures, excellent dielectric properties, small-diameter rigidity, strength at elevated temperatures, low-loss characteristics, zero porosity, and economy.

In addition to rods, single crystal sapphire is available in the form of windows and domes for microwave and infra-red systems. Special sapphire shapes for custom applications can be obtained.

Other single crystals, such as ruby and doped titania for maser amplifiers are available. LINDE also supplies single crystal yttrium iron garnet, for solid-state devices.

For further data, write to Linde Company, Division of Union Carbide Corporation, 30 East 42nd Street, New York 17, N. Y. *In Canada*: Linde Company, Division of Union Carbide Canada Limited. Address Department E-92

Linde TRADE MARK

UNION CARBIDE

"Linde" and "Union Carbide" are registered trade marks of Union Carbide Corporation.

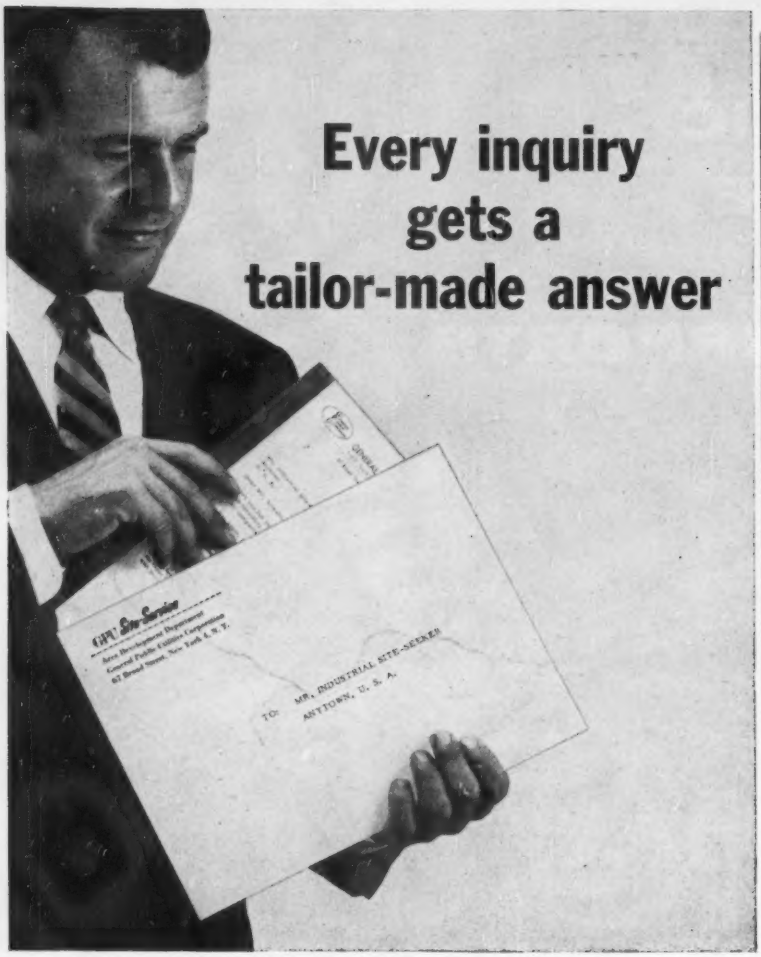

GPU *Site-Service*

gives you complete facts about specific locations to fit your needs

We feel that anyone who writes us deserves a personal reply! That's why your answer will be tailor-made to *your* operations, *your* marketing situation, with plant site recommendations screened to meet *your* requirements. Other companies have already found our personal assistance extremely valuable. You will, too. Write, wire or phone today, knowing that your inquiry will receive prompt, *tailor-made* attention.

GPU ELECTRIC POWER COMPANIES

Metropolitan Edison Co.
Pennsylvania Electric Co.
New Jersey Power & Light Co.
Jersey Central Power & Light Co.

GENERAL PUBLIC UTILITIES CORPORATION

Att: Wm. J. Jamieson, Area Development Director, Dept. E-6
67 Broad St., New York 4, N. Y. WHitehall 3-5600

types. These resistors have steatite type cores, continuous operating temperature of 134 deg maximum at 40 C ambient; are resistant to humidity; are furnished in 5 percent and 10 percent tolerances; have axial leads which make them simple to mount.

CIRCLE NO. 332 READER SERVICE CARD

Inverter high frequency

POWER SOURCES, INC., Burlington, Mass. Model SV2C1200 Sineverter is a general purpose inverter for use in missiles, aircraft and other applications where the primary a-c power frequency is 2,000 cps. It employs the Sineverter technique which provides sine-wave power from any d-c source without filtering. Input voltage is 22 v d-c with transients per MIL-E-5894A. Output voltage is 115 v ±5 percent, 2,000 cps ±1 percent, single-phase, 0-50 va. Waveshape is sinusoidal with less than 5 percent total harmonic distortion.

CIRCLE NO. 333 READER SERVICE CARD



Servo Amplifier modular unit

PLUG-IN INSTRUMENTS, INC., 1416 Lebanon Rd., Nashville, Tenn. Model SA-2002-P d-c servo ampli-

Optional Chopper Stabilization

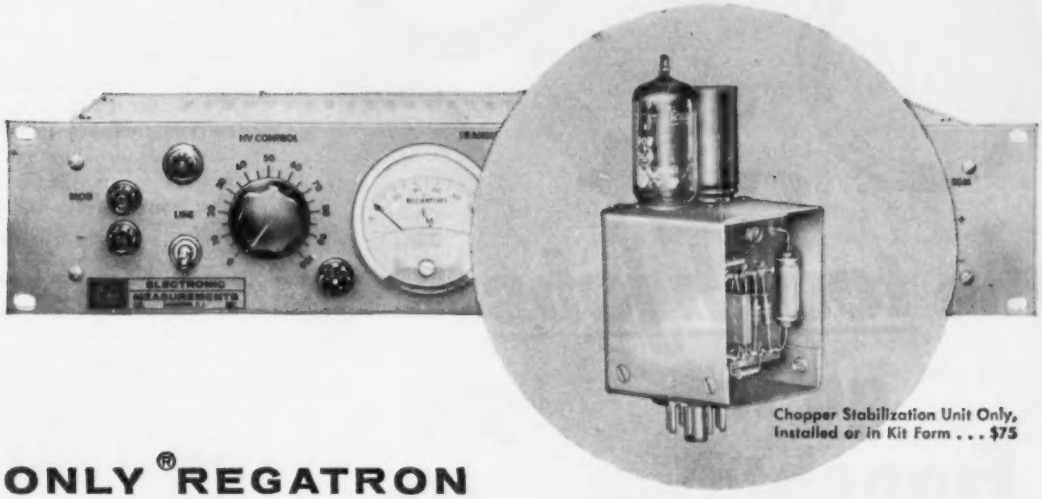

Chopper Stabilization Unit Only, Installed or in Kit Form . . . $75

ONLY ®REGATRON PROGRAMMABLE POWER SUPPLIES HAVE IT!

0.01% or 0.003 V from no load to full load . . . this is the conservative regulation specification for Regatron Programmable Power Supplies equipped with chopper stabilization. And just as important, chopper stabilization assures a higher order of regulation and stability at every output voltage, even at fractions of one volt.

There are other advantages too: Chopper stabilization provides for exceptionally high repeatability of voltage control settings . . . enhances remote control operation.

And chopper stabilization can be specified at any time. The compact plug-in unit can be installed at the factory as an original accessory, or it can be installed in the field. A complete kit is available for field installations. Instructions and all hardware are included.

Ask your local E/M representative for more information, or write . . .

® REGISTERED U.S. PATENT OFFICE. PATENTS ISSUED AND PENDING.

ELECTRONIC MEASUREMENTS
COMPANY, INCORPORATED
EATONTOWN · NEW JERSEY

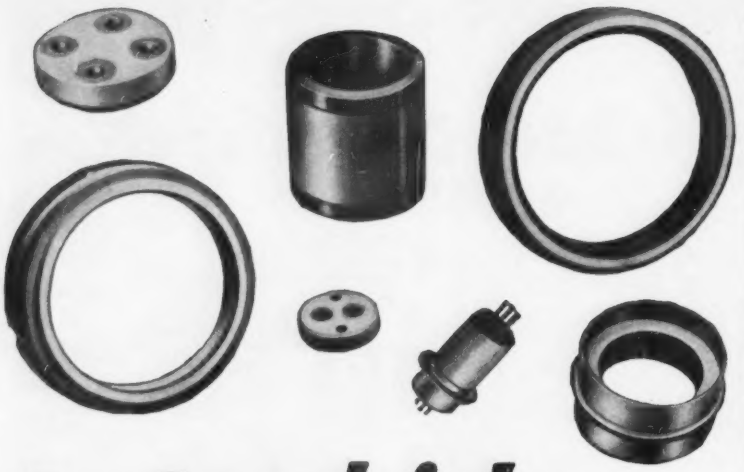

the *tough jobs* go to Frenchtown

Ask any engineer why he selects Frenchtown *first* for those "must" jobs, and chances are he'll sum up his answer in a single word—*confidence !*

It's the reason, too, why more and more engineers make Frenchtown their number one supply source for high temperature ceramics, components, assemblies, ceramics-to-metal seals, metallized ceramics, and specialized body compositions.

Next time you are faced with one of those "tough jobs" and want to be sure to come up with the right answer—*fast*, check with Frenchtown. You'll be in good company.

Literature is available on Frenchtown materials and products. We'll be happy to send you copies without obligation. Write *today*.

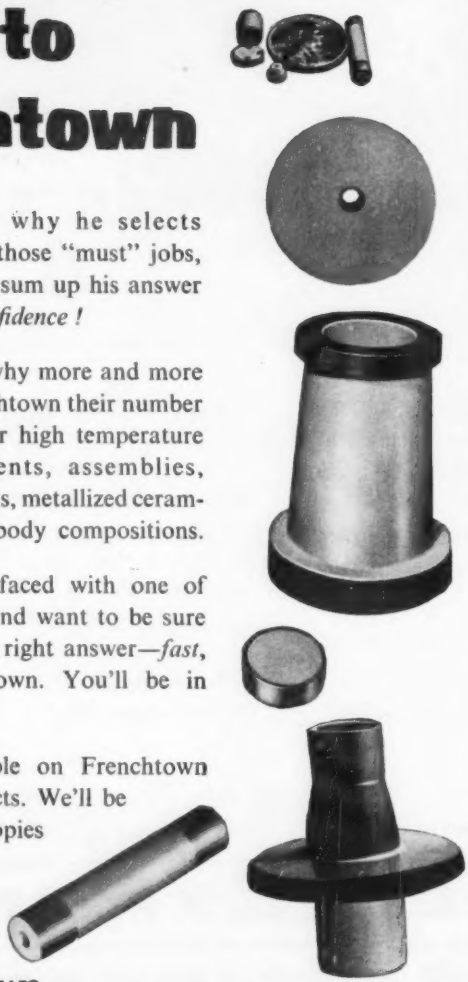

frenchtown PORCELAIN COMPANY

FRENCHTOWN, NEW JERSEY

fier is designed for electro-hydraulic control system applications and features overall modular construction. Installed in its matching mounting frame, the amplifier may be partially withdrawn from the panel under full power for adjustments and checks. Further withdrawal disengages the unit for complete removal. There are adjustments for gain, zero, balance, dither and feedback potentiometer excitation. Internal gain of the unit is greater than 60 ma/v. The quiescent current for the differential output is 15 ma for loads up to 3 K.

CIRCLE NO. 334 READER SERVICE CARD



Power Supply modular type

TRANS ELECTRONICS, INC., 7349 Canoga Ave., Canoga Park, Calif., has added model RS-210 to its economical modular line of d-c power supplies for use in laboratory, test bench or original equipment. The new module is designed with silicon rectifiers and besides being available in the time-saving chassis or subchassis construction illustrated, can be purchased rackmounted with and without meters.

CIRCLE NO. 335 READER SERVICE CARD

Silicon Rectifiers JAN approved

TRANSITRON ELECTRONIC CORP., Wakefield, Mass., announces a series of axial lead JAN silicon rectifiers designed for use in applications that demand reliable operation at high temperatures and under severe

universal transistor tester

$59.50

MEASURES I_{CO}, ALPHA

•

MEASURES DIODE FORWARD AND REVERSE CURRENTS

•

TESTS FOR SHORT CIRCUITS

Battery-operated, portable model TT-1 provides quick, reliable measurements on both PNP and NPN transistor types of low, medium and high power. Universal panel receptacle and test leads accommodate all standard and special types. Dual scale on precision 50- microamp ammeter indicates transistor leakage and gain, diode forward and reverse currents. Ideal for laboratory, production or field test. Strong, shock-resistant case.

Write for complete specifications.

REFLECTONE

THE REFLECTONE CORP. • STAMFORD, CONN.

CIRCLE NO. 238 READER SERVICE CARD

specify...

G-E KSR* TANTALYTIC* CAPACITORS

for computer, missile, radar, and airborne electronic equipment.

- Provide high microfarad ratings in cases of nominal size and weight without loss of quality or reliability.
- Offer voltage ratings to 150 volts d-c from −55C to +85C; to 100 volts for 125C operation.
- Are up to 50% lighter, 30% smaller compared with lower microfarad units rated for 125C.

SPECIFYING INFORMATION on G.E.'s complete Tantalytic line is available from your nearest Apparatus Sales Office, or write for GEA-6766A, to General Electric, Section 449-11, Schenectady 5, N. Y.

*Registered Trademark of General Electric Co.

GENERAL ELECTRIC

CIRCLE NO. 239 READER SERVICE CARD

here's a complete element of your block diagram... now readily available

R P M*

*REGULATED POWER MODULE

All design, development and production work has been completed for you in these RPM power modules. Buy them as catalog items, and get these advantages:

Wide choice of overlapping adjustable voltage and current ranges—125 to 425 volts...50 to 400 milliamps.

Excellent regulation—0.05% NL to FL, or 10% line change.

Compactness—RPM units are custom designed and built with our own transformers for most efficient use of space.

Super-rugged construction includes one-piece, cast aluminum housings and JAN hardware. RPM modules can be mounted in **any** position.

High reliability—achieved by use of top quality components throughout, and rigid inspection during production.

Request ACDC Bulletin 400.

ACDC **ELECTRONICS, INC.**

2979 N. Ontario St., Burbank, Calif.

Formerly NYT ELECTRONICS, INC.

CIRCLE NO. 169 READER SERVICE CARD

systems translation...

KELLOGG MATRIX

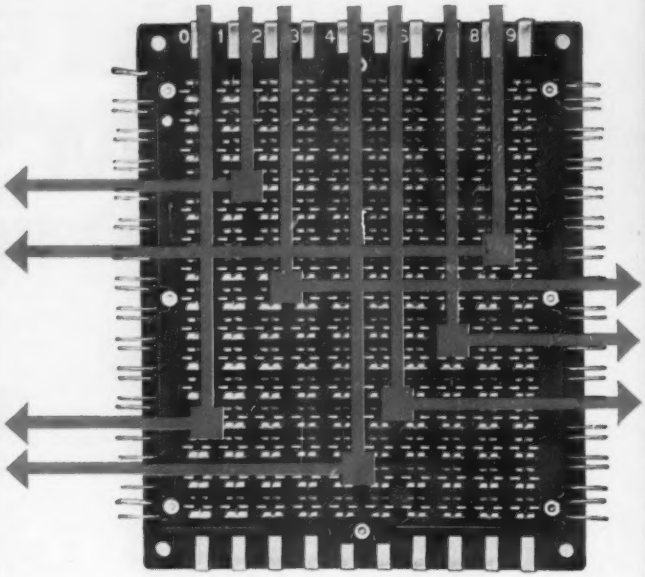

easy-to-position · never needs adjustment

USES MINIATURE SELENIUM DISC RECTIFIERS
—mounted without soldering or wiring.
SIMPLE CIRCUIT REARRANGEMENT
—remove covers, reposition discs.
MOUNTED ON PHENOLIC GRID
—with 2 sets of vertical and horizontal conductors.
HIGH MATRIX CAPACITY
10 x 30 or 300 miniature rectifier discs.

Ideal for systems requiring translation or various diode matrices, such as:

1. Automatic warehouses—to seek out or sort order parts.
2. Chemical processing plants—all controls made from a central point.

Another fine product for the growing electronics industry backed by Kellogg and International Telephone and Telegraph Corporation.

Write for full details and complete catalog of Kellogg systems and components.

KELLOGG Communications Division of IT CHICAGO, ILLINOIS

Kellogg Switchboard and Supply Company, 6650 South Cicero Avenue, Chicago 38, Ill. Communications Division of International Telephone and Telegraph Corporation.

Manufacturers of Relays, Hermetically Sealed Relays, Switches, Miscellaneous Telephone Type Components

environmental conditions. The JAN types IN538, IN540, and IN547 offer high efficiency and ease of mounting in new and existing rectifier applications. Maximum ratings are 200 v, 400 v, and 600 v respectively at 250 ma, 150 C ambient temperature.

CIRCLE NO. 336 READER SERVICE CARD

Tantalum Capacitor micromodule type

P. R. MALLORY & CO., INC., 3029 E. Washington St., Indianapolis 6, Ind. The micromodule tantalum capacitor was developed in two thicknesses, 0.028 in. in ratings up to 15 μf X volts, and 0.035 in. in ratings up to 30 μf X volts. Three different ratings and five terminal arrangements were developed in each thickness. The units have an effective operating temperature range of −65 to 85 C.

CIRCLE NO. 337 READER SERVICE CARD



Tiny Relays for p-c boards

POTTER & BRUMFIELD, INC., Princeton, Ind., announces relays with terminals located on 0.2 in. by 0.2 in. coordinates to permit mounting on printed circuit boards by automatic assembly techniques. The new terminal layouts are available on both dual coil magnetic latching and on single coil action relays. Both relays operate under 100 g shocks and 30 g vibrations to 2,000 cps with no

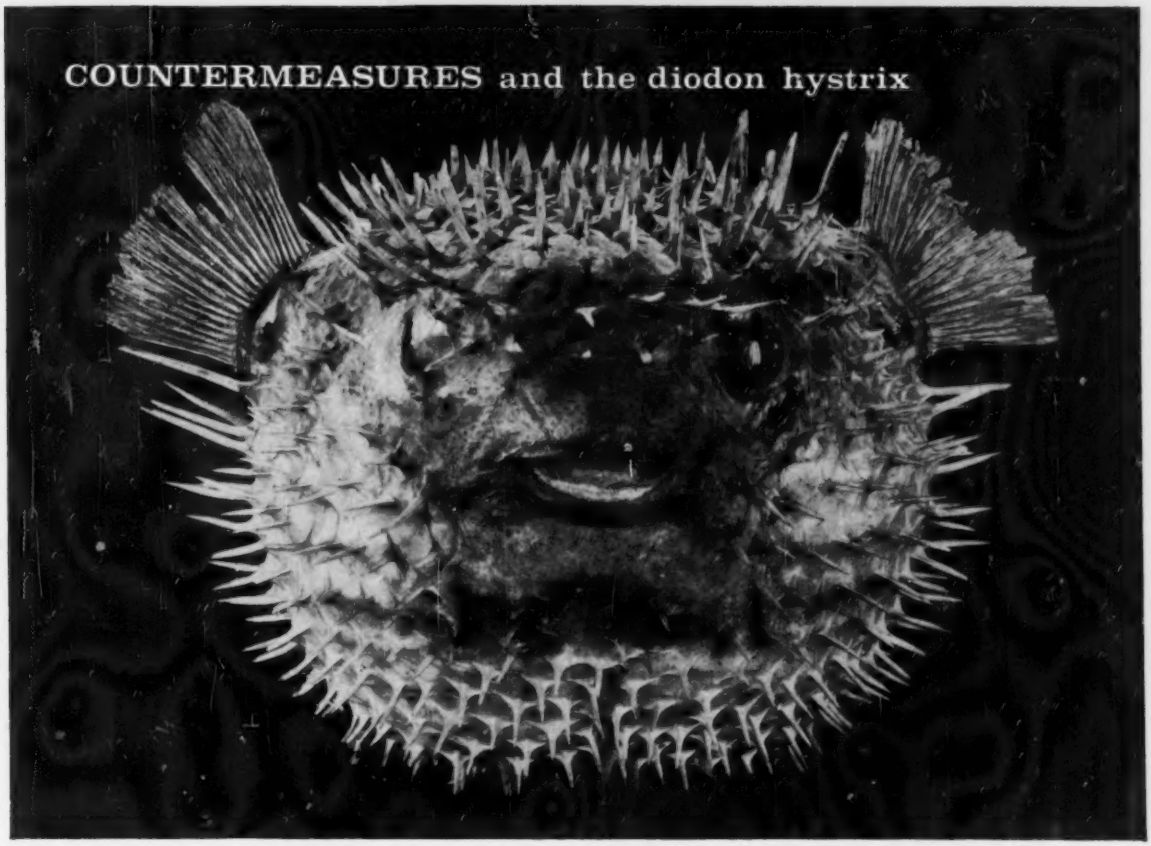

NOT ALL COUNTERMEASURES ARE SUBTLE – obvious disaster is normally avoided

Commonly known as the porcupine fish, the Diodon possesses one of nature's best countermeasure systems. When danger is imminent he takes in both water and air expanding to several times his original size. He also presents another defense in the sharp spines that completely surround his body. Truly an efficient countermeasure system by nature.

The deterrent striking force of SAC could well be likened to the spines of the Diodon. Most certainly anyone foolish enough to try to gobble up this country would experience a fatal case of indigestion. Many SAC attack bombers are equipped with countermeasure devices of types built by I.F.I. which assure completion of their missions.

The world is a mass of defensive "bristles" but none are longer or sharper than ours.

MILITARY INSTRUMENTS ifi FOR INDUSTRY ELECTRONICS

INSTRUMENTS FOR INDUSTRY, Inc.
101 New South Road, Hicksville, L. I., N.Y.

Graduate engineers with two or more years of circuit application in the fields of electronics or physics are invited to meet with Mr. John Hicks in an informal interview or send complete resume to: Dir. Personnel, IFI, 101 New South Road, Hicksville, New York.

NEW ELECTRONIC CONTROL METER

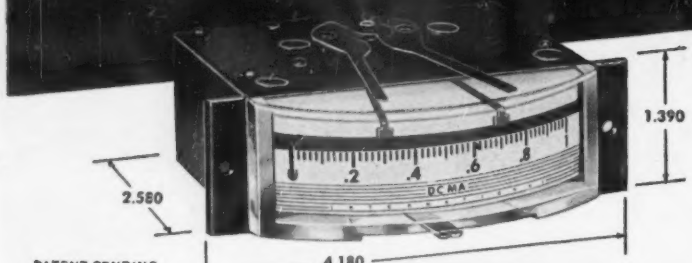

Model 2545

Operates WITHOUT Contacts at the Switching Points!

Offering You these Important Advantages:—

- **ONLY MINIATURIZED CONTROL METER** . . . now available without contacts.
- **MORE RELIABLE SWITCHING** . . . with elimination of contact resistance, arcing and corrosion. Signal does not depend on pointer contact.
- **FULL-SCALE USE** . . . of indicating meter always available, regardless of control point settings.
- **MORE ACCURATE READINGS** . . . with indicating circuit completely isolated from the switching circuit.
- **SIMPLEST SYSTEM** . . . with no need for pull-in or locking coils and no re-set mechanism.
- **EXTERNAL ZERO ADJUSTER**

for Applications like these--

- Automatic Process Control
- Missile Check-out
- Nuclear Instrumentation
- Machine Tool Control

Switching is accomplished by a metal shield attached to the pointer passing between 2 mutually coupled coils of a self-contained, transistorized oscillator-detector-amplifier. Positions of the 2 control points are manually set by means of external arms. Provides the same scale length as conventional 4½" meters. Accuracy held to ±2% of full-scale for dc and ±5% for ac.

Write **FOR ENGINEERING DATA SHEETS ON ELECTRONIC CONTROL METER AND:** Side Indicators; 1½" Ruggedized Meters; 1" and 1½" Panel Meters; 1½" VU, and Db Meters; Sub-Miniature Rotary and Lever Switches; Miniature Multitesters.

MINIATURIZATION HEADQUARTERS

international instruments

INCORPORATED

P.O. BOX 2954, NEW HAVEN 15, CONN. • Cable: "INTERINST"

contact openings in either armature position. Relays with single coil action pull-in at 260 mw at 25 C; dual coil latching relays at 230 mw. All coil connections are polarized to take advantage of permanent magnet forces in the relay.

CIRCLE NO. 338 READER SERVICE CARD

Klystrons
7,500-hr service life

RAYTHEON MFG. CO., Waltham 54, Mass., has increased the life warranty of its line of low-power communication klystrons to 7,500 hr by advanced manufacturing techniques and rigorous quality control. Designed primarily for microwave communications equipment, the mechanically tuned, reflex-type klystrons cover government, studio link and common carrier frequency bands. Two tubes are used in each relay unit; one in the transmitter; one in the receiver as local oscillator. This makes it unnecessary to maintain a constant relationship between outgoing and incoming frequencies. Tubes can be driven in parallel from a single receiver-type power supply.

CIRCLE NO. 339 READER SERVICE CARD

A-C Potentiometer
high linearity

PERKIN-ELMER CORP., Norwalk, Conn. A 40-ohm output impedance with a linearity of only ±0.01 per-

cent is obtained in the Vernistat model 3-B a-c potentiometer. It substantially eliminates loading error problems. Unit also features high resolution and minimal phase shift in a small lightweight package. Quadrature at 400 cps is less than 0.1 mv per v. Minimum input impedance at 400 cps is 50,000 ohms (constant); maximum input voltage at 400 cps is 35 v.

CIRCLE NO. 340 READER SERVICE CARD

Resistors wire-wound

LEONARD ELECTRONICS, INC., 1209 Olympic Blvd., Montebello, Calif. A new line of Delta Ohm precision wire-wound resistors, with resistance tolerance to 0.005 percent if desired and operating temperature range from − 65 C to + 135 C has been announced. Available in approximately 40 sizes and wattages at present, the line surpasses the requirements of both MIL-R-93B and MIL-R-9444. Size range is from $\frac{1}{4}$ in. by $\frac{3}{8}$ in. to $\frac{1}{2}$ in. by 2 in., with wattages from 0.1 w to 2.0 w.

CIRCLE NO. 341 READER SERVICE CARD



Push-Button Switch open blade

ROBERTSHAW - FULTON CONTROLS, Co., P. O. Box 449, Columbus 16, Ohio. A push-button switch designed for mounting through a panel features dpdt circuitry and performs the functions of two separate switches with resulting savings in cost and space. It has

Replace 866 Rectifier Tubes with Tarzian

TYPE S-5130 SILICON RECTIFIERS

10,400 piv 300 ma dc

- Small Size
- Long Life
- Higher Efficiency
- Greater Circuit Safety
- Safety Construction
- Temperature Versatility
- No Warmup Required

The Tarzian Type S-5130 Silicon Rectifier was designed as a direct replacement for 866 mercury vapor rectifier tubes. The S-5130 is capable of continuous duty operation of 300 ma dc at 10,400 PIV with a resistive-inductive load. Smaller than the 866 tube, the S-5130 requires no filament power or warmup period. The Tarzian type S-5130 conserves space and performs more efficiently than the 866. Shock hazard is minimized by use of an impregnated housing. Capable of operation in temperatures to 100°C, the S-5130 is ideal for use in applications which demand ruggedness, efficiency and ability to withstand temperature variation.

ELECTRICAL CHARACTERISTICS

MAX. RMS INPUT VOLTAGE	7400
MAX. INVERSE PEAK VOLTAGE	10400
MAX. PEAK CURRENT (MA)	3000
MAX. DC CURRENT (MA)	300
CIRCUIT	SINGLE PHASE HALF WAVE
DUTY	CONTINUOUS
TYPE LOAD	RESISTIVE-INDUCTIVE
AMBIENT TEMPERATURE	100°C MAXIMUM

NOTE: FOR CAPACITIVE LOAD DERATE DC CURRENT BY 20%. DERATE RMS INPUT VOLTAGE BY 50%

SEND FOR DATA SHEET

SARKES TARZIAN INC., RECTIFIER DIVISION

DEPT. D-5, 415 NORTH COLLEGE AVE., BLOOMINGTON, INDIANA

IN CANADA: 700 WESTON RD., TORONTO 9, TEL. ROGER 2-7535

EXPORT: AD AURIEMA, INC., NEW YORK CITY

CIRCLE NO. 173 READER SERVICE CARD

CURTISS WRIGHT

CUSTOM DESIGNED
ELECTRONIC COMPONENTS

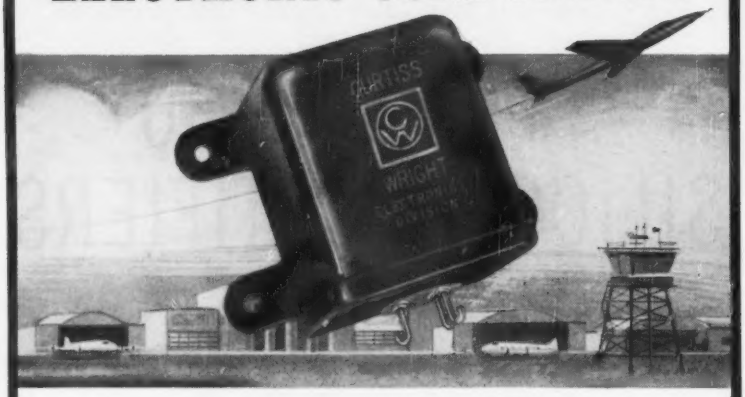

TIME DELAY RELAYS
Instant reset — Voltage compensated

Curtiss-Wright "IR" thermal time delay relays reset the instant they are de-energized. The second cycle will always provide the same delay as the first cycle. Variations from 22 to 32 volts will not affect the time delay of the "IR" Series.

SPECIFICATIONS

Time delay.....Preset 20 to 180 seconds
Contact arrangement..SPST, DPDT OR SPDT
Temperature comp.....−65°C to +125°C
Weight:.....4½ ounces
Terminals.....Hooked solder type
Mounting.....Bracket or stud
Variations of the above relay characteristics available upon request.

New DIGITAL MOTORS

Stepping motors for high reliability applications. Meet the requirements of assured reliability and long life for aircraft, missile and automation systems.

FEATURES | Bi-directional • Positive lock • Dynamically balanced • Simplicity of design • High pulsing rate.

New ULTRASONIC DELAY LINES

Enables development engineers to employ new concepts in existing and projected applications. Low in cost, small in size and simple to operate.



SPECIFICATIONS

Delay range.....5 to 6000 microseconds
Tolerance.....± 0.1 microsecond
Signal to noise ratio.....Greater than 10:1
Input and output impedance.50 to 2000 ohms
Carrier frequency.....100 kc — 1 mc
Delay to pulse rise time.....Up to 800:1

WRITE FOR COMPLETE COMPONENTS CATALOG 159

ELECTRONICS DIVISION
CURTISS-WRIGHT
CORPORATION • WEST CALDWELL, N. J.

combination side and tail solder terminals for easy wiring and is mounted with two No. 4-40 machine screws. It is rated at 10 amperes, 125 v a-c and has gold flashed contacts. Switch has 0.015 in. minimum overtravel. Operating force on the button is 8 oz maximum, and release force, also measured on the push button, is 2 oz minimum.

CIRCLE NO. 342 READER SERVICE CARD



Rotary Switch compact unit

CONTROLS CO. OF AMERICA, 9555 Soreng Ave., Schiller Park, Ill. A selection of eight different combinations of 1, 2 or 3 spst switch positions are offered in series 777 rotary switch. The versatile unit features ⅛-in. wide spade terminals with holes for solder connections, positive indexing, metal cover and a molded nylon shaft and cam. It is rated at 10 amperes, 125 v a-c; ½ h-p, 125/250 v a-c.

CIRCLE NO. 343 READER SERVICE CARD

Accelerometer potentiometer-type

PACIFIC SCIENTIFIC Co., 6280 Chalet Dr., Los Angeles, Calif. Model 4205 Potentiometer-type accelerometer measures only 1.1 in. wide, 1.5 in. long, and 0.8 in. deep. It delivers 2 percent accuracy over a −10 to +30 g range, and is designed as an inexpensive instrument for tele-

metering and control. Silicon fluid damping is utilized for exceptional shock and vibration immunity. Temperature range is from −55 C to +82 C.

CIRCLE NO. 344 READER SERVICE CARD



Film Resistor glass enclosed

CORNING GLASS WORKS, Corning, N. Y., announces a glass-enclosed resistor completely impervious to moisture, and designed to meet requirements of MIL-R-10509C, Characteristic B. It has Dumet leads which are sealed to the thermally compatible glass case, creating an hermetic seal. The leads are welded inside the case to Kovar metal disks, which are fused to the resistance element. Resistance range of the ¼ w unit is 10 ohms to 0.5 megohm at 300 v and 70 C, with derating to 150 C.

CIRCLE NO. 345 READER SERVICE CARD



Interval Timer digital unit

ERIE-PACIFIC, 12932 S. Weber Way, Hawthorne, Calif. Model 2202TL is a compact, rugged, digital interval timer designed especially for airborne or ground support operation under extreme environmental conditions. Silicon solid-state devices are employed to meet military tem-

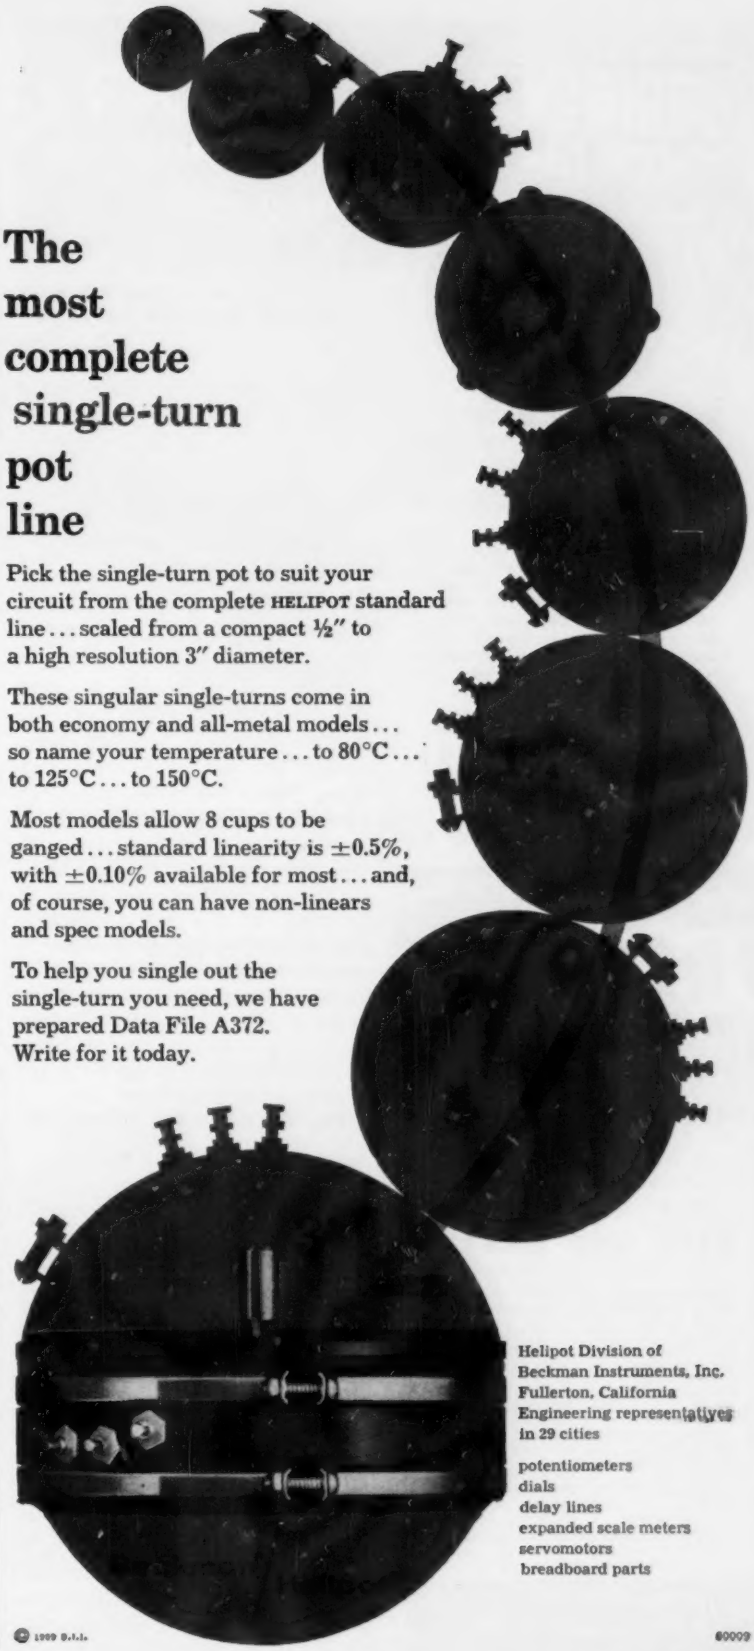

The most complete single-turn pot line

Pick the single-turn pot to suit your circuit from the complete HELIPOT standard line... scaled from a compact ½" to a high resolution 3" diameter.

These singular single-turns come in both economy and all-metal models... so name your temperature... to 80°C... to 125°C... to 150°C.

Most models allow 8 cups to be ganged... standard linearity is ±0.5%, with ±0.10% available for most... and, of course, you can have non-linears and spec models.

To help you single out the single-turn you need, we have prepared Data File A372. Write for it today.

Helipot Division of Beckman Instruments, Inc. Fullerton, California
Engineering representatives in 29 cities

potentiometers
dials
delay lines
expanded scale meters
servomotors
breadboard parts

© 1959 B.I.I. 60009

marion
advancement in instrument design

NEW Model 53 RET

LOW COST
ELAPSED TIME INDICATOR

Unsealed, bakelite case design provides low cost. Self-starting synchronous motor drives 5-digit counter; records hours to 99999 or hours and tenths to 9999.9. Square Model 53 SET 3½" also available. For 110 or 220 volt, 60 cycle AC. Standard ASA/MIL 3½" mounting. Data on request. Marion Instrument Division, Minneapolis-Honeywell Regulator Co., Manchester, New Hampshire, U.S.A.

Copyright © 1959, Marion

marion
"WHERE ELECTRONICS MEETS THE EYE"
meters

CIRCLE NO. 233 READER SERVICE CARD

send for this
FREE
EICO Electronics Catalog

you save 50% on Top-Quality
Test Instruments
Hi-Fi • Ham Gear
KITS AND WIRED
for professional and home use

TEST INSTRUMENTS
battery eliminators
battery testers
bridges
decade boxes
electronic switch
flyback tester
oscilloscopes
probes
signal and sweep generaters
tube testers
transistor tester
vacuum tube voltmeters
volt-ohm-milliammeters

HI-FI
stereo and monaural
tuners
preamplifiers
power amplifiers
integrated amplifiers
speaker systems

HAM GEAR
cw transmitter
modulator-driver
grid dip meter

OVER 1½ MILLION EICO instruments in use throughout the world.

LIFETIME service and calabration guarantee.
IN STOCK at your neighborhood EICO dealer.
Send now for FREE catalog E9

EICO 33-00 N. Blvd., L. I. C. 1, N. Y.
praised by the experts as BEST BUYS IN ELECTRONICS

perature specifications. No vacuum tubes are used other than the counting decades which are efficient, reliable and long-lived cold cathode gas tube devices. Pluggable glass epoxy printed circuit boards, one on either side of the unit, swing outward for easy access to board components and the equipment interior.

CIRCLE NO. 346 READER SERVICE CARD



Crystal Filters in the 37-mc range

HYCON EASTERN, INC., 75 Cambridge Parkway, Cambridge 42, Mass. Model 354 series crystal filters are designed to be directly paralleled with no isolation padding networks in order to minimize r-f losses. System selectivity is achieved at the r-f frequency. Therefore, false triggering due to undesired adjacent signals is eliminated. Operating temperature range is −40 C to +85 C. Vibration is 5 g to 100 cps, 2 g to 1,000 cps. Size is 3⅞ in. long by ¾ in. wide by 1½ in. high.

CIRCLE NO. 347 READER SERVICE CARD

Beacon Transmitter for space vehicles

APPLIED SCIENCE CORP. OF PRINCETON, P. O. Box 44, Princeton, N. J. A miniature, low-power combination subcarrier oscillator transmitter, designed for use in satellite or space-vehicle tracking systems, is now available. Carrier frequency of

ROUND
SQUARE
KEY
"D"

Cut Holes In Less Than 90 Seconds!
with Walsco
CHASSIS PUNCHES

Make any size hole you want for sockets, plugs, meters, others . . . do it faster with less effort with famous Walsco L.T.* Chassis Punches. Easy to use . . . last a lifetime. Send postcard for free literature.

(*L.T. is Walsco's exclusive "Low-Torque" design)

WALSCO ELECTRONICS MFG. CO.
Division of Textron Inc.
Western Plant: Los Angeles 18, California
Main Plant: ROCKFORD, ILLINOIS, U.S.A.

CIRCLE NO. 234 READER SERVICE CARD

Edo

FOREMOST
in
MARINE
LORAN

EDO CORPORATION
College Point, L.I., N.Y.
Since 1925

CIRCLE NO. 235 READER SERVICE CARD

the transmitter can be chosen from any crystal controlled frequency in the range of 100 to 150 mc. The output power of 30 to 100 mw achieves line-of-sight operation from 150 to 1,000 miles in normal satellite applications. The transmitter is intended to be amplitude modulated although phase modulation at subcarrier frequencies up to 22 kc can be used.

CIRCLE NO. 348 READER SERVICE CARD

Scaler transistorized

RADIATION INSTRUMENT DEVELOPMENT LABORATORY, INC., 5737 S. Halsted St., Chicago 21, Ill. Model 49-22 offers both preset time and preset count. The digital readout system used is fully transistorized and allows the displayed numbers to be read at wide angles and in direct sunlight. Resolving time is $\frac{1}{2}$ μsec with maximum counting rate of 2 mc. Count capacity of 10^7 is included with time capacity to 1,000 minutes. Amplifier sensitivity is $\frac{1}{2}$ mv and gain, 1,000. Printed circuitry and modular construction are used throughout.

CIRCLE NO. 349 READER SERVICE CARD



Limit Detector digital unit

SYSTRON CORP., 950 Galindo St., Concord, Calif. Absolute accuracy is achieved with the model 1470 digital limit detector. Low-go-high indication to an exact number of counts is made possible by two banks of presettable switches. Unit can be integrated with any Systron

FREE ANALYSIS
OF YOUR SMALL METAL PARTS WELDING PROBLEMS

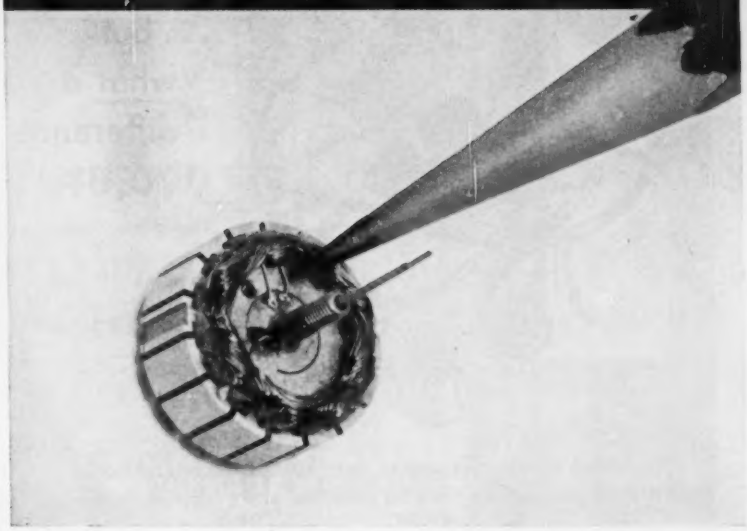

TIME SLASHED FROM 15 MINUTES TO 15 SECONDS!

PROBLEM: ground the copper armature ground wire of a miniature servo motor. The method used was to drill a hole through the armature laminations, drive a brass pin through the hole, then solder the .005" ground wire to the pin.

SOLUTION: a **RAYTHEON WELDING ANALYST** recommended a DC welder to weld the wire directly to the steel shaft of the armature.

RESULT: time reduced to 15 seconds—stronger, more reliable electrical connection.

HOW YOU CAN BENEFIT:

If you have a small metal parts joining problem, see your Raytheon Welding Analyst. He will be happy to help you—without cost or obligation. Mail the coupon below for full details.

RAYTHEON

Excellence in Electronics

MAIL THIS COUPON FOR FREE ANALYSIS —without cost or obligation.

TO: RAYTHEON COMPANY
INDUSTRIAL APPARATUS DIVISION
PRODUCTION APPARATUS DEPT. EH9
WALTHAM 54, MASS.

☐ Please send me literature on Raytheon Welding Systems.

☐ Please have a Raytheon Welding Analyst contact me.

My problem is: (describe metals, thicknesses, type of part, etc.)

_____

_____

NAME_____

COMPANY_____

ADDRESS_____

CITY_____STATE_____

. . . they're both my babies

. . . but what a difference

Despite their identical appearance, those young innocents are barely fraternal. They *are* destined for fame, but along different Roads of Life.

The one on the left latches magnetically, eats only 50 mw. and works best in a circuit designed expressly with his characteristics in mind. He's also a few months older than his colleague, and has already made solid friends with at least one big military group. They like his particular combination of magnetic latching operation, high sensitivity, and ability to take 30 g's of vibration to 5000 cycles and 100 g shocks both on paper *and* in the flesh.

The little fellow on the right, on the other hand, offers a ready *replacement* suitable for existing equipment where standard DPDT switching is needed and the signal level is up around 200 mw. As such he's looking forward to making an even wider circle of friends than his companion — especially since he can take just as much vibration and shock and is put together with exactly the same care and high class materials.

Both of these hermetically sealed prodigies are described in their birth certificates which you can get for the asking. If you think the 50 mw., magnetic latching, left-hand one is for you, ask for the *Series 32* specs; if it's the right-hand, "on-off" one you're interested in, specify *Series 33*. Don't try to go by looks — everything's coming in crystal cans these days.

* Sigma Corporate Image

SIGMA

SIGMA INSTRUMENTS, INC.
62 Pearl Street, So. Braintree 85, Mass.

AN AFFILIATE OF THE FISHER-PIERCE CO. (Since 1938)

counter to provide alarm, digital control, or classification of basic measurements. Reliability is increased by the use of solid-state circuitry throughout. A front panel light indicates high-within-low as the unit monitors each counting cycle. Contact closure outputs provide classification or control for each of these conditions.

CIRCLE NO. 350 READER SERVICE CARD



D-C Relay telephone-type

OHMITE MFG. CO., 3665 Howard St., Skokie, Ill. Model TO medium size, telephone-type d-c relay provides increased operating sensitivity, as compared to certain miniature telephone types, because of its longer coil. The terminals project at the mounting and for through-panel connections. Hinge pin armature construction is employed, and a staked-in polepiece eliminates the air gap between the polepiece and frame for increased operating sensitivity. A wide range of operating voltages—up to 220 v d-c—is available.

CIRCLE NO. 351 READER SERVICE CARD



Miniature Tetrode for tv receivers

RADIO CORP. OF AMERICA, Harrison, N. J. The 6FV6 is a new sharp-cutoff tetrode of the 7-pin miniature type designed for use as an r-f amplifier tube in vhf tuners of tv

receivers. This tube has a high transconductance (8,000 μmhos) and a high ratio of plate current to grid-No. 2 current (7 to 1). The high transconductance provides for high gain per stage with corresponding reduction in equivalent noise resistance. The high ratio of plate current to grid-No. 2 current provides good signal-to-noise ratio.

CIRCLE NO. 352 READER SERVICE CARD



Building Block dual flip-flop

DIGITAL EQUIPMENT CORP., Maynard, Mass. A dual flip-flop containing two identical flip-flops with built-in output amplifiers is part of a new line of 5 mc transistorized system building blocks. The dual flip-flop is designed to provide savings over the cost of separate flip-flops in buffer and control registers and other non-counting applications. The system building blocks are used in making permanent or semipermanent digital computer-type systems and in other data handling applications.

CIRCLE NO. 353 READER SERVICE CARD

Snap-Acting Switch subminiature

UNIMAX SWITCH DIVISION, The W. L. Maxson Corp., Ives Road, Wallingford, Conn. Type USM4 snap-acting switch withstands continued use at temperatures up to 400 F. It measures only 25/32 in. long by ¾ in. wide by ½ in. high. Small size permits the switches to be gang-mounted, four to the inch, for multiple-circuit control in miniaturized

HIGH SPEED alphanumeric PRINTER with integrated storage and programming electronics

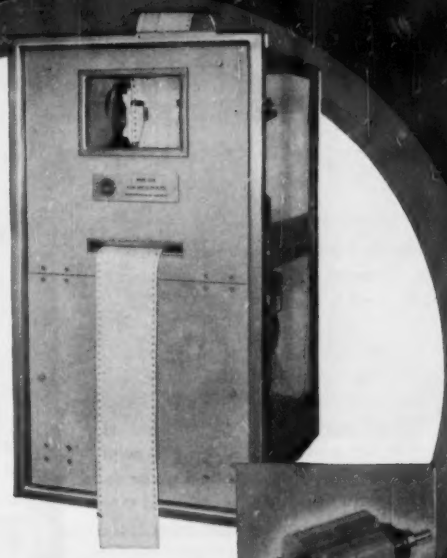

prints up to **48,000** digits per minute

adaptable to all digital data sources



SOLID STATE DESIGN
MODEL 3260

A POTTER EXCLUSIVE: Stellite Type Fonts To Order.

Check these features...

OPERATING SPEEDS
4 BIT DATA @ 20 lines/sec.
6 BIT DATA @ 10 lines/sec.
PAPER FEED TIME.....15 Ms
SERIAL LOADING RATE 20 kcs

RELIABILITY
Solid state storage, transistorized hammer drive and paper feed . . . troublesome contacts and wiper arms eliminated by reluctance pickup. Digital logic throughout.

CUSTOM DESIGNS
Designs to meet MIL or Commercial Specs.

COMPATIBILITY
4 or 6 bit input data in parallel or serial-parallel form and in any coding system.

FLEXIBILITY
Self-synchronized or random (slaved) operating modes
Tailored horizontal and/or vertical formats
Modular construction permits wide variation of characteristics
Accessible input/output command functions for maximum utility

Look to Potter for a complete line of magnetic and perforated tape handlers, associated equipment and system combinations.

The mark of Engineering Quality

POTTER INSTRUMENT COMPANY, INC.
Sunnyside Boulevard, Plainview, N. Y.
OVerbrook 1-3200

Potter has career opportunities for qualified engineers who like a challenge, and the freedom to meet it.

NEW!

Electro-Pulse, Inc.

MILLIMICROSECOND

CURRENT PULSE GENERATORS

...3000 SERIES

for Magnetic Core and Logic Test

- **High Source Impedance**
- **50 ma to 2.5 amp Stabilized Output**
- **Rise Times to 35 millimicroseconds**
- **Useable to 3 megacycles**

Available in 2 or 4 channel configuration, the 3000 Series is specifically designed for wide application in the design and test of current pulse driven devices, with particular consideration given to the requirements of ferrite and thin film memory and switch cores.

The equipment produces variable width, amplitude, and rise time outputs from external triggers, or may be operated as an amplifier with output widths controlled by input signal durations. Typical signal sources are ordinary pulse generators, programmed digital trigger generators, gate generators, and transistor logic.

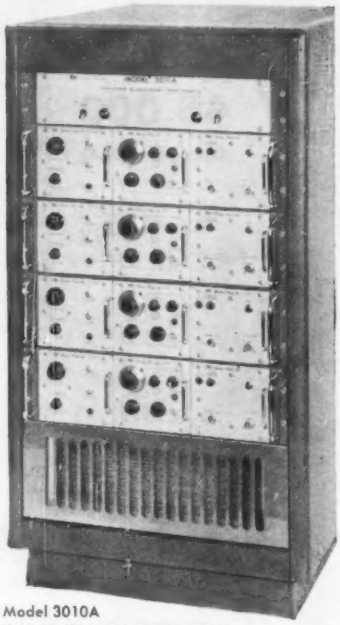

Model 3010A
FOUR CHANNEL GENERATOR

Write for complete data—our Bulletin 3000/EE

Also available with multichannel programmed 10 bit trigger generator—
—Request Bulletin 5100B/EE



PLUG-IN MODULAR CONSTRUCTION
provides unparalleled flexibility of application and ease of maintenance.

Electro-Pulse offers a COMPLETE LINE of pulse generating and coding equipment:

- √ General Purpose Pulse Generators
- √ Word Generators
- √ Time Delay Generators
- √ Gate Generators
- √ Code Group Generators
- √ Pulse Train Generators
- √ Time Mark Generators
- √ Electronic Counters



Model 4560A
10 MC DUAL PULSE GENERATOR

Representatives in Major Cities

Electro-Pulse, Inc.

11861 TEALE ST., CULVER CITY, CALIF. • Phone: UPton 0-9193 or EXmont 8-6764

apparatus. Electrical ratings of the spdt switch are: 2.5 amperes, 30 v d-c, inductive; 5 amperes, 30 v d-c, resistive; and 5 amperes, 125/250 v a-c.

CIRCLE NO. 354 READER SERVICE CARD

A-C Voltmeter suppressed zero

ERA PACIFIC, INC., 1760 Stanford St., Santa Monica, Calif. Model SZV-125 voltmeter provides expanded scale reading accuracy without sacrificing valuable scale space for compression at the low end. Full scale deflection is accomplished for the voltage range of 100 v a-c to 125 v a-c, thus providing adequate coverage for the normal range of 115 v ±10 percent. Reading accuracies of ±0.2 v and meter accuracies of better than 1 percent are obtainable. A time constant of less than 0.5 sec provides faster readings and closer monitoring of line conditions. Unit may be used on frequencies between 50 and 450 cps.

CIRCLE NO. 355 READER SERVICE CARD



Pressure Switch for missile use

FREBANK CO., 711 W. Broadway, Glendale 4, Calif., has developed a miniature pressure switch for missile and similar space applications. Model 3486 is designed for use with

both hydraulic fluids and gases, and for 400 psi to 3,000 psi systems. Its snap action design is such that it is extremely resistant to acceleration, shock and vibration. Bearing a maximum weight of only ¾ oz, the switch has a temperature range from −65 F to +275 F, a proof pressure of 4,500 psi and a burst pressure of 7,500 psi. It can be supplied in spst, spdt or dpst.

CIRCLE NO. 356 READER SERVICE CARD

Snap Bushing variety of i.d.'s

HEYMAN MFG. CO., Kenilworth, N. J. A new Heyco nylon bushing snaps into a ¾ in. diameter chassis hole and locks under finger pressure. No threated holes or nuts are required to hold it in place. It cannot be removed unless the nylon step-clips are compressed. Wire, cable, hoses or tubing can then be run through the bushing, which, being nylon, provides a neat appearing and smooth unbreakable insulation protection. The bushing is available with various inside diameters, and requires no tools to install.

CIRCLE NO. 357 READER SERVICE CARD

Voltage Regulator broad band

ARMOUR ELECTRONICS, 4201 Redwood Ave., Los Angeles 66, Calif. The PoweRite broad band line voltage regulators extend equipment life as much as 50 percent and assure optimum performance for all types of electronic devices operat-

NEW! An Electronic ANALOG COMPUTER KIT for just $199.95

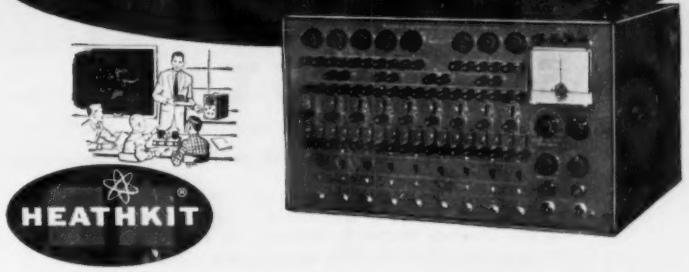

HEATHKIT®

- Simulates Mechanical Problems, Processes and Conditions
- Solves Mathematical Problems (Add, Sub., Divide, Multiply, Integrate, Differentiate, get Transfer Functions)
- In a Class by Itself, But Compares in Functions to Computers Costing Over $1,000.00
- Easy to Build in 35 to 40 Hours With No Experience

The lowest priced computer of its quality available anywhere, the new Heathkit EC-1 Computer now puts advanced engineering techniques within reach of all.

Industry will find the EC-1 invaluable in trial solutions to mechanical and mathematical problems . . . shortens engineering time, speeds up preliminary work, frees the advanced-computer time for more complex problems and final solutions. And the EC-1 aids in training computer operators and acquainting engineers with computer versatility and operation.

Schools and *colleges* will find the EC-1 ideal for teaching and demonstrating in engineering, physics, and math classes; perfect for laboratory use in teaching computer design and applications.

Individuals will find the EC-1 a fascinating helper in solving mathematical and mechanical problems. To consultants and those who work alone, the EC-1 soon becomes an indispensable path to speedy, trustworthy solutions.

Set up scores of complex problems with the assortment of precision components and patch cords supplied. Read problem results directly on the 3-range computer meter, or use an external read-out device such as the Heathkit OR-1 DC Oscilloscope, or a recording galvanometer. Meter can be switched to read output of any amplifier for problem results or balancing purposes. Informative manuals provided show how to set up and solve typical problems, illustrate operating procedures, and supply basic computer information, references, and construction procedure. Shpg. Wt. 43 lbs.

SPECIFICATIONS: Amplifiers: 9 D.C. Operational Amplifiers using one 6U8 per amplifier; each solves mathematical problems; each balanced by individual panel control without removing problem set-up. Computing components mount on connectors and plug into panel sockets. Open loop gain approximately 1000. Output – 60 to +60 volts at 3 ma. **Power Supplies:** +300 volts at 25 ma electronically regulated; variable from +250 to +350 by control with meter reference for setting +300 volts. Negative 150 volts at 40 ma regulated by VR tube. **Coefficient Potentiometers:** Five on panel. **Initial Condition Potentiometers:** Three on panel; used to introduce initial velocity, acceleration, etc. on the three "given" quantities. **Repetitive Operation:** Multivibrator cycles a relay at adjustable rates (.1 to 15 CPS), to repeat the solution any number of times; permits observation of effect on solution of changing parameters. **Meter:** 50-0-50 ua movement. **Power Requirements:** 105-125 volts, 50-60 cycles, 100 watts. **Dimensions:** 19¾" W. x 11¼" H. x 15" D.

Order Direct by Mail or see your nearest Authorized Heathkit Dealer



FREE CATALOG

Mail the coupon now for the Free Heathkit Catalog describing over 100 easy-to-build Heathkit products including test equipment, ham radio gear, marine equipment and hi-fi components.

HEATH COMPANY BENTON HARBOR 14, MICH.

a subsidiary of Daystrom, Inc.

Please send the latest Free Heathkit catalog.

NAME _____

ADDRESS _____

CITY _____ ZONE _____ STATE _____

ALL PRICES F.O.B. BENTON HARBOR, MICH. PRICES AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

SERVO SYSTEM ANALYZERS AT WORK:

ON STAGE AT EVERY STAGE

SERVOSCOPE®

plays a role from concept to tracking

SERVOSCOPE servo system analyzers are playing a part today in every phase of the missile industry, from testing the blue-sky dream to tracking the blue-sky path. For example, SERVOSCOPE is being used for:

— **Complete analyses** of any missile control system in minutes, whether it be electro-hydraulic, electro-mechanical, or electro-pneumatic! — **GO, NO-GO production testing** or detailed debugging of missile control systems and components. — **Ready analyses** of radar and other tracking servo systems...in the field as easily as in the breadboard stage.

Only the highly flexible SERVOSCOPE can play so many roles in the missile field. Why? Because of its wide-range coverage, providing precise and rapid results; its fast direct-setting and read-out; its high-accuracy measuring of phase, transient response, and gain; and swift plotting of Nyquist, Bode, or Nichols diagrams.

A full line of five models provides a full range of essential features.
• Covers the frequency range from .001 to 100 cps. • Evaluates AC carrier and DC servo systems. • Generates sine waves, modulated carrier wave, and square-wave phaseable signals with respect to either electronic linear sweep or sinusoidally modulated reference signal. • Frequency calibration accuracy of ± 2%, phase measurement accuracy of ± 1%. • Accepts any carrier frequency from 50 to 5,000 cps. • Indicates by means of SERVOSCOPE indicator or oscillograph recording.

These same features lead to all-stage use of SERVOSCOPE in Aviation, in Instrumentation, Communication, Navigation, Electronic and Electrical Engineering, Education, Computers, and in many other areas.

Acquaint us with your servo analysis problems. Specification and application data is available. Request TDS 1100-3

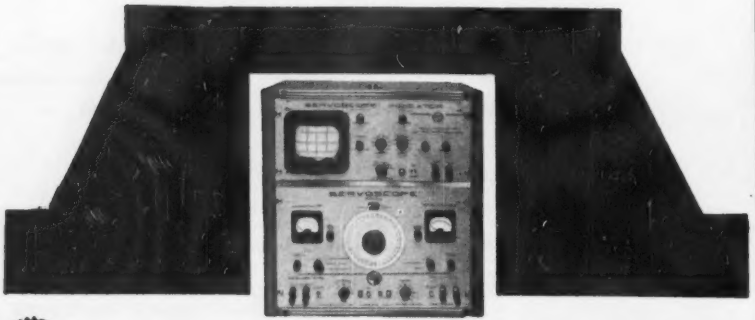

SERVO CORPORATION *of* AMERICA

20-20 Jericho Turnpike • New Hyde Park, L. I., New York

182 CIRCLE NO. 182 READER SERVICE CARD

ing on a-c voltage. The new, fully transistorized regulators provide 4 kva of power regulated to within ±0.5 percent and operate equally well at any frequency between 45 cps and 400 cps. They display response rates of better than 60 v/sec, are power factor insensitive and show less than 0.01 percent total harmonic distortion.

CIRCLE NO. 358 READER SERVICE CARD

Self-Balancing Pot miniaturized

DAYSTROM PACIFIC, 9320 Lincoln Blvd., Los Angeles 45, Calif., announces a highly versatile, miniature flight test instrument, Autopot series EMP-NS2, with dimensions of 3⅞ by 3⅞ by 7 in. This self-balancing potentiometer is designed to accept outputs from thermocouples or other transducers used in flight test programs. It converts temperature, pressure, stress, flow or acceleration signals into direct-reading indications. Plug-in construction permits simple conversion of basic model for either millivoltmeter or pyrometer applications. Operation is completely automatic due to new servo design.

CIRCLE NO. 359 READER SERVICE CARD



Capacitors common anode

ILLINOIS CONDENSER CO., 1616 N. Throop St., Chicago 22, Ill., announces type SMTUCP common anode miniature electrolytic capacitors. They are dual capacitors in

one case, and their common anode construction with isolated cathodes allows economy and space savings in modern transistor electronic circuitry. Isolation between cathodes allows the electronic designer to use individual capacitors for dual filtering, by-pass, or coupling where two or more individual capacitors were previously needed.

CIRCLE NO. 360 READER SERVICE CARD

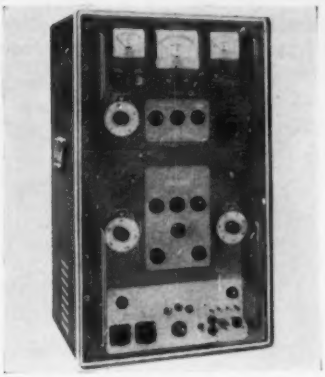

Power Supply bwo/twt

POLYTECHNIC RESEARCH & DEVELOPMENT CO., INC., 202 Tillary St., Brooklyn 1, N. Y. The PRD type 813 universal bwo/twt power supply is designed for use with a wide variety of microwave tubes. Among its features are individual adjustment of delay time, collector, anode grid and heater elements; provisions for both internal and external sweep and amplitude modulation; automatic gain control at the grid when used with external detectors; counter type readout for delay line supply; and dual output jacks for parallel tube operation or external metering.

CIRCLE NO. 361 READER SERVICE CARD

Magnetic Shield multisectional

MAGNETIC SHIELD DIVISION, Perfection Mica Co., 1322 No. Elston Ave., Chicago 22, Ill., has developed a

COAXIAL SWITCHES

TRANSCO

Transco makes more varieties of broad band Coaxial Switches than any other company. Here are some examples of our complete product line:

Y TYPE Solenoid Actuated SPST, SPDT



A TYPE Solenoid Actuated SP3T, SP4T

AX TYPE Solenoid Actuated Transfer

M TYPE Manual SPDT to SP6T, DPDT & Transfer

E TYPE Motor Actuated SPDT to SP6T, DPDT & Transfer





L TYPE Motor Driven Lobing Switch

Manufacturers and designers of microwave components and systems for transmission control. Send for complete product data.

Creative microwave engineers write for information about YOUR future with this progressive, well established firm.

YL TYPE Solenoid Actuated SPDT for RG117/U & Similar Cables

TRANSCO PRODUCTS INC.
12210 NEBRASKA AVENUE
LOS ANGELES 25, CALIFORNIA

Because HIGH RELIABILITY Is A "Must" . . .

Missile Engineers Specify

Vitramon®

CAPACITORS

"Vitramon" Capacitors for high reliability applications are tested to meet the most stringent requirements for performance. Every capacitor ordered under the new High Reliability Specification S-1002 undergoes tests encompassing 300,000 UNIT HOURS OF LIFE AT 125° C to assure an A. Q. L. 12 times higher than Mil Specifications — and every shipment against an S-1002 order is accompanied by tabulated results to verify extreme reliability.

Inherent characteristics are built into "Vitramon" Capacitors through the fusing of quality porcelain enamel and fine silver to produce a dense, homogenous, truly monolithic unit that requires no case or hermetic seal. If you have capacitor applications requiring high reliability, write for High Reliability Specification S-1002, describing materials used, manufacturing process, as well as all tests and failure rates.

"VITRAMON" CAPACITORS OF PROVEN QUALITY ARE USED IN THESE MISSILES:

JUPITER	TALOS
LACROSSE	TARTAR
NIKE-ZEUS	ATLAS
BULLPUP	BOMARC
CORVUS	FALCON
POLARIS	MACE
REGULUS II	SNARK
SPARROW II	TITAN
SPARROW III	VANGUARD
	EXPLORER

Vitramon®

INCORPORATED

BOX 544E • BRIDGEPORT 1, CONNECTICUT

184 CIRCLE NO. 184 READER SERVICE CARD

new multisectional Netic Co-Netic magnetic shielding assembly which facilitates installation in existing equipment without dismantling the structure. It is particularly suited for assembled sensing or guidance devices that display an unanticipated sensitivity to magnetic fields. The unique overlapping multisectional assembly is designed to provide effective shielding without modifying the initial structure or dismantling a complex electronic set-up. Design flexibility permits effectively enclosing virtually any configuration.

CIRCLE NO. 362 READER SERVICE CARD



D-C Power Supply for lab use

PERKIN ENGINEERING CORP., 345 Kansas St., El Segundo, Calif., has developed a new 400-cycle a-c input d-c power supply utilizing a combination of magnetic amplifiers, transistors, silicon power rectifiers, and a silicon Zener diode which provides extremely reliable long life and excellent dynamic load regulation. Model M-1201 has a transient regulation of ±10 percent with a step change of no load to full load or vice versa and recovers to within 1 percent of the output voltage setting in less than 0.1 sec. Ripple is less than 0.05 v rms. A-c input is 115/200 to 126/220 v and d-c output is 24/32 v at 25 amperes.



Silicon Diodes stable, reliable

CONTINENTAL DEVICE CORP., 12911 Cerise Ave., Hawthorne, Calif. A new series of silicon diodes is manufactured by the controlled fusion

technique which effects precise control over the junction formation and geometry and leads to very uniform characteristics in production. Types CD1111 through CD-1116 have working voltages through 300 v and forward currents in excess of ½ ampere at 1 v. Reverse currents are below 5 millimicroamperes at the maximum working voltage.

CIRCLE NO. 364 READER SERVICE CARD



Count Rate Meter rack-mounted

HAMNER ELECTRONICS CO., INC., Princeton, N. J. The N-701C log count rate meter is designed specifically for direct counting of pulses resulting from nuclear disintegrations. It is used with scintillation detectors, G-M counters, BF_3 counters and reactor instrumentation. There is a maximum-count limit switch that may be used to activate an alarm system or other external device that will signal the presence of excessive radiation. Scale expansion allows any three adjacent decades to be selected by a front panel switch.

CIRCLE NO. 365 READER SERVICE CARD



A-C Voltage Divider ultralinear

ELECTRO-MEASUREMENTS, INC., 7524 S.W. Macadam Ave., Portland 1, Oregon, announces a new a-c voltage divider, the model DT-72 Dekatran. A laboratory standard is now available to measure voltage ratios with a linearity accuracy of better than 0.0001 percent (1 ppm). Specially

Build This Superb *Schober* Organ From Simple Kits and SAVE OVER 50%!

The Beautiful *Schober* CONSOLETTE – the only small organ with two full 61-note keyboards and 22 stops. Requires only 2' x 3'2" floor space! Commercial value approximately $1600 or more – yet you save over 50% when you build this thrilling instrument!

LET US SEND YOU **FREE DETAILS** HOW TO ASSEMBLE A *Schober* ELECTRONIC ORGAN IN SPARE TIME!

Give Your Family A Lifetime of Musical Joy With A Magnificent Schober ELECTRONIC Organ!

Now you can build the brilliant, full-range Schober CONSOLETTE or the larger CONCERT MODEL with simple hand tools. No skills are necessary to construct an instrument with one of the finest reputations among electronic organs. No woodworking necessary – consoles come completely assembled and finished. All you do is assemble clearly marked electronic parts guided by clear illustrations and detailed step-by-step instructions. Even teen-agers can assemble the Schober! You build from kits, as fast or as slowly as you please...at home, in spare time – with a small table serving as your entire work shop!

THE GREAT **CONCERT MODEL** meets specifications of **American Guild of Organists**

Pay As You Build Your Organ; Start With As Little As $18.94!

You may start building your Schober at once with an investment of as little as $18.94. The musical instrument you assemble is as fine, and technically perfect, as a commercial organ built in a factory – yet you save over 50% on top-quality electronic parts, on high-priced labor, on usual retail store mark-up! In your own home, with your own hands you build an organ with *genuine pipe organ tones* in an infinite variety of tone colors to bring into your home the full grandeur of the Emperor of Instruments. You may build the CONSOLETTE for your home, or you may want to build the great CONCERT MODEL for home, church, school or theatre. You save 50% and more in either case.

Send For Complete Details On Schober Organs and For Hi-Fi Demonstration Record

The coupon will bring you a handsome 16-page booklet in full color describing Schober organs in detail, plus articles on how easy and rewarding it is to build your own organ and how pleasant and quick it is to learn to play the organ. In addition, we have prepared an exciting 10" hi-fi LP record demonstrating the full range of tones and voices available on the Schober, which you may have for only $2.00 (refunded when you order a kit). Literature on the Schober is FREE! There is no obligation; no salesman will call.

Mail This Coupon For FREE Literature and Hi-Fi Record Today!

The Schober Organ Corp., Dept. EL-1
2248 Broadway, New York 24, N. Y.

☐ Please send me FREE full-color booklet and other literature on the Schober organs.

☐ Please send me the 10" hi-fi Schober demonstration record. I enclose $2.00 (refundable on receipt of my first kit order).

Name.....

Address.....

City.....Zone...State.....

NEW

TRANSISTORIZED

PHASE METER

TYPE 328-A

By ACTON LABORATORIES

FREQUENCY RANGE
FROM 10 CPS – 50 KC

•

PHASE ACCURACY 1°
FROM 10 CPS–10 KC

•

LONG-TIME
STABILITY

FEATURING . . . Direct reading from 0° to 360° in 6 ranges of 60° each (on a 5" meter scale) • Wide variety of applications • Recorder connection • Can operate from external 45 volt battery

Type 328-A is designed specifically to measure the phase angle in degrees between two sinusoidal or non-sinusoidal voltages within a frequency range from 10 cps to 50 kc. It is capable of handling a wide variety of applications in the field of audio facilities, supersonics, servo-mechanisms, geophysics, vibrations, acoustics, aerial navigation, electronic power, transformation, signalling, computing amplifiers and resolver systems.

Acton Laboratories' Type 328-A Phase Meter is extremely simple to operate. All controls are functional. Readings of phase angles are indicated directly on meter scale which has six full-scale ranges of 360°, 300°, 240°, 180°, 120°, and 60°. Phase angle, as measured by the 328-A is defined as the angular separation of the corresponding zero-axis crossings of the periodic signals being compared.

Available as Type 328-AR with a 19" panel for rack mounting.

SPECIFICATIONS

Amplitude Range — .25 to 170 volts peak (1 volt min. below 500 cps)

Phase Accuracy — For input signals above 10 volts peak from 10° to 350°

Frequency	Phase Accuracy
10 cps — 10 kc	1°
10 kc — 30 kc	2°
30 kc — 50 kc	3°

Input Impedance — One megohm shunted by 20 mmf

Recorder Output — Maximum voltage at 360° is −2.0 volts. Internal output impedance is approximately 100,000 ohms

Power Supply — 105-125 volts, 60 cycles A.C. Total power consumption is approximately 20 watts.
Terminals are also provided for operating from an external 45 volt battery.

Dimensions — 15¾" W. x 8¼" H. x 10¾ D. (cabinet mounted)

Weight — 18 lbs.

Complete technical details on Type 328-A Phase Meter are available on request.

ACTON LABORATORIES, INC.
517 MAIN STREET, ACTON, MASS. • COlonial 3-7756

constructed toroidal transformers are combined to provide seven decades of accurate voltage division. Accuracy is maintained over a wide range of audio frequencies, input voltages and ambient temperatures.

CIRCLE NO. 366 READER SERVICE CARD



I-F Test Set multifunction unit

TELONIC INDUSTRIES, INC., Beech Grove, Ind. The SSX-2/PAM-2 combines in one instrument the following functions: r-f sweep signal, c-w signal source, variable marker, video pulse, c-w pulse, audio modulated c-w, and high level audio voltage. Simplified procedures are incorporated for complete testing of i-f amplifiers and similar equipment. Accuracy is ±0.25 percent.

CIRCLE NO. 367 READER SERVICE CARD



Comparator high precision

WAYNE KERR CORP., 2920 N. 4th St., Philadelphia 33, Pa., announces the B-821 low impedance comparator for accurate comparison of an unknown impedance. It compares impedances in the order of 1,000 ohms against a known standard with an accuracy of 0.001 percent, and covers ratios between standard and unknown of 0.8:1 and 1.2:1 in steps of 0.00001. An external a-f source and detector are required. The maximum effective impedance, look-

ing back into the bridge, is a few milliohms; measurement frequency can be between 500 cps and 5 kc.

CIRCLE NO. 368 READER SERVICE CARD



Preset Controller for industrial use

DYNAPAR CORP., 5150 Church St., Skokie, Ill., has developed a transistorized preset controller series designed specifically for heavy duty industrial production applications, such as counting, measuring and control for automatic cutting-to-length, batch counting and sequencing, automatic machine tool positioning, and many other measuring and control functions. Units operate directly from all types of sensing devices, and have provision for a wide range of optional outputs. Preset range is 0 to 180,000 counts per minute, with instantaneous reset (optional: to 75,000 counts per sec). Numerical readout consists of either glow counter tubes or Nixie in-line indicators.

CIRCLE NO. 369 READER SERVICE CARD



Amplifier record-playback

POTTER INSTRUMENT CO., INC., Sunnyside Blvd,. Plainview, N. Y. Model 921 family of write/read amplifiers affords users of digital magnetic tape transports a wide choice of characteristics for virtually any current or advanced application. Tape speeds from 1 in./sec to 150 in./sec can be accommodated, with a response to minimum signal levels as low as 150 μv. Designed for compatibility with existing return to zero and non-return to zero recording systems, this

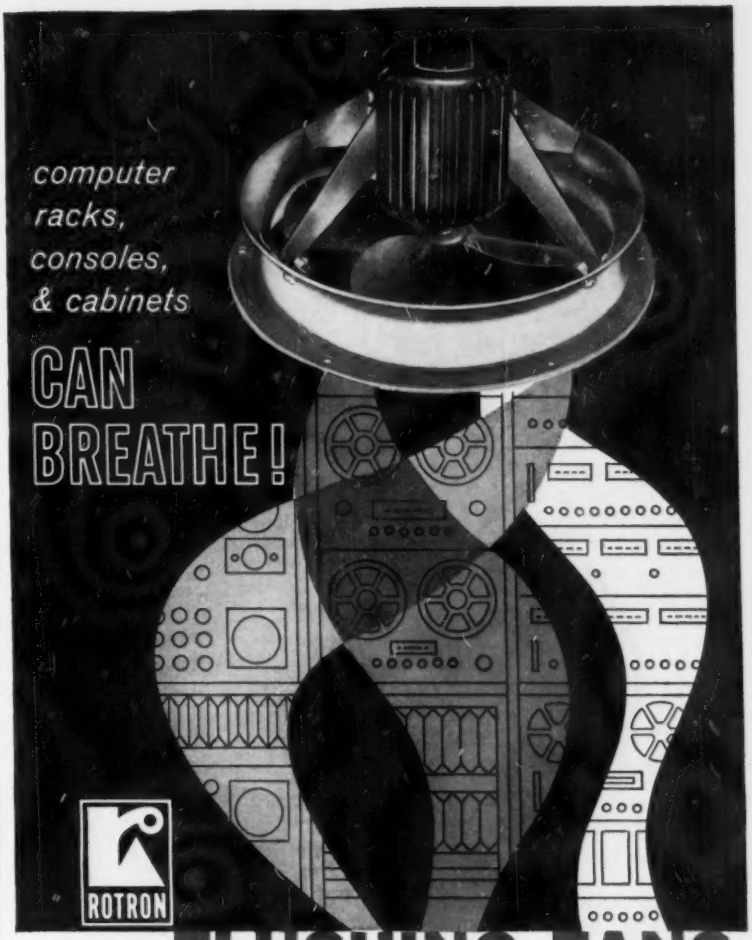

FLUSHING FANS

Models MF, NF and HF fans, with propeller diameters of 5½", 6½" and 8" respectively, are produced to fulfill such design criteria as: high output, light weight, compactness and self-contained construction.

Power requirements are 50-60 or 400 cps, 1Ø or 3Ø. The fans can be mounted with their shafts in any position. Motors can run in both high and low ambient temperatures and require no maintenance. Venturi ring permits simple mounting to a dust filter housing or cabinet wall. Push or pull air-flow available. Mil specs are met.

Write for complete catalog information for the fan that best meets your particular requirements.



Motors are covered by U.S. Pat. Design No. 174,148. Other U.S. and Foreign Pats. Pend.

ROTRON mfg. co., inc.
WOODSTOCK, NEW YORK
In Canada: The Hoover Co., Ltd., Hamilton, Ont.

NEW FROM SPECTROL

The Industry's First Complete Line of

METAL

Multi-Turn Precision Potentiometers

Spectrol's sturdy new metal multi-turns are as tough to push out of shape as Sir Spectrol, our man in armor. Available in eight models, featuring anodized aluminum cases with 3/16 inch thick walls that absorb no moisture — dissipate more heat faster and stay dimensionally stable. These armored pots, four 3-turn and four 10-turn, will operate from −55°C to +125°C and withstand relative humidity of 95%.

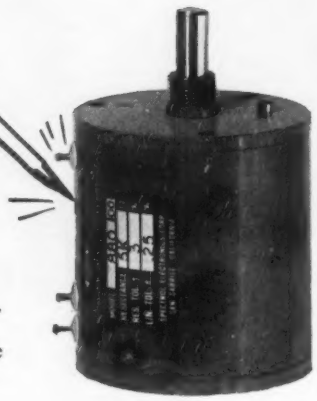

You can choose diameters of 7/8, 1, 1-5/16 and 1-13/16 inches in both three and 10-turn models. Standard linearity tolerance is ±0.25% with special linearity available to ±0.020%. Like Sir Spectrol, the man in the iron suit, the new metal multi-turns will take a respectable jolt. They function to 20g vibration from 55 to 2,000 cps and withstand 30g shocks.

For more details, call your Spectrol engineering representative listed in the yellow pages or write us direct. Please address Dept. 18.

MODEL	540	530	580	560	780	790	880	840
No. of coil turns	10	3	10	3	10	3	10	3
Diameter (inches max.)	⅞	⅞	1	1	1 5/16	1 5/16	1 13/16	1 13/16
Standard resistance range in ohms (±3%)	25-125K	10-36K	25-150K	10-40K	30-300K	10-90K	50-400K	20-120K
Special resistance to	250K	75K	250K	75K	750K	240K	1 meg	330K

SPECTROL ELECTRONICS CORPORATION
1704 South Del Mar Avenue
San Gabriel, California

Be sure your pot's in armor!

13

amplifier equipment offers a choice of d-c level or preselected pulse width for output use. D-c level or pulse is also acceptable for input to write amplifier.

CIRCLE NO. 370 READER SERVICE CARD

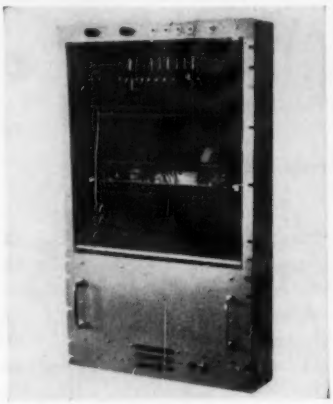

Buffer Storages flexible/control

DI/AN CONTROLS, INC., 40 Leon St., Boston 15, Mass. A new line of sequential-to-sequential buffer storages are based on coincident-current magnetic storage elements. The buffers are designed to implement digital data transfer between systems or equipments that are asynchronous, or have different data rates, for collection of regular or aperiodic data from tapes, analog-to-digital converters, and other digital sources. The exceptional flexibility of the buffers is attributed to a unique modular control-system design. Units feature a wide range of standard control options.

CIRCLE NO. 371 READER SERVICE CARD



Coaxial Relay high speed

ELECTRONIC COMPUTER CO., 618 Maple St., Conshohocken, Pa. Hermetically-sealed coax relay for input applications in data system and other uses. Features are: coiled impedances, to 6,000 ohms; low contact resistance; operating rate, up to 500 closures per sec; pull-in and

SET IT DOWN!
HOOK IT UP!

ILLCO-WAY
ionXchange
EQUIPMENT

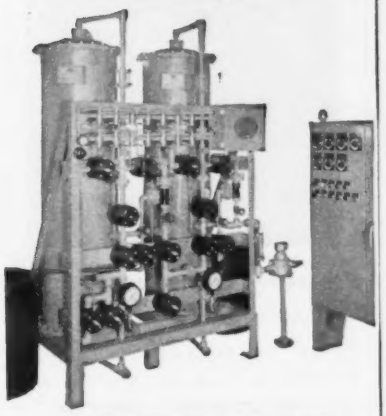

COMPLETE AUTOMATIC DE-IONIZER

Here is a complete, loaded, fully-instrumented, *automatic* ionXchange unit in a neat, compact, and *ready-to-operate* "package." It is equipped with our own Illco/Matic, all-plastic, air-actuated valves, which have been specially developed for ionXchange service. The Control Panel, also our own design and manufacture, provides all necessary quick-adjustment features, and requires only electrical hook-up to the terminal box on the frame. The only other connections required are to plant service.

FULLY ASSEMBLED AND READY TO INSTALL

All structural assembly of elements, all piping, all wiring, and all installation of air lines is done in our factory by men of long experience. Then the unit is tested for proper operation of all circuits, loaded with the proper supporting beds and resins, painted, bolted to a skid, and crated for delivery to the exact spot it will be used. *This is the quickest, easiest, and surest way for you to get a reliable, ready-to-go ionXchanger* — arranged and instrumented to suit your special needs, whatever they are.

Write for Particulars

ILLCO-WAY
ILLINOIS WATER TREATMENT CO.
840 Cedar St.
Rockford, Ill.

NEW YORK OFFICE: 141 E. 44th St., New York 17, N.Y.
CANADIAN DIST.: Pumps & Softeners, Ltd., London, Can.

CIRCLE NO. 236 READER SERVICE CARD

release time, less than 1 millisec; operating currents, to 0.5 ampere resistive also can be used on inductive devices with contact protection; contact capacitance, less than 1 $\mu\mu$f.

CIRCLE NO. 372 READER SERVICE CARD

Portable Chamber heat, cold, vibration

CONRAD, INC., 141 Jefferson St., Holland, Mich. Model FBV-8 temperature vibration chamber features a hydraulic lift for raising or lowering the chamber to accommodate a vibration exciter lead through the bottom of the chamber or with an accessory adapter diaphragm through the side of the chamber. Temperature range is +800 F to ambient temperature or with liquid CO_2 cooling to approximately −100 F. Instrumentation is available with several options from indicating controllers to strip chart potentiometer recording controllers.

CIRCLE NO. 373 READER SERVICE CARD



Frequency Meters expanded scale

AMERICAN MACHINE & FOUNDRY Co., 1025 North Royal St., Alexandria, Va. The commercial model direct reading frequency meter uses a square 4½ in. meter face. It has a 0.25 percent accuracy and a range from 380 to 420 cps. A separate

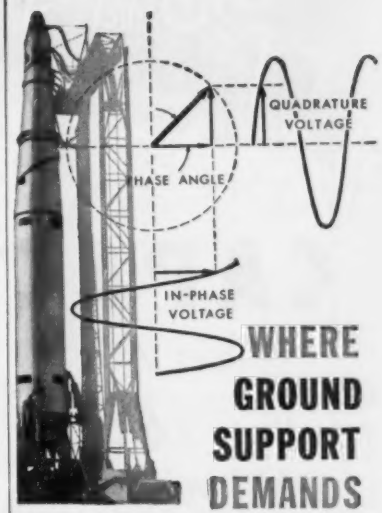

WHERE GROUND SUPPORT DEMANDS

DIRECT READING OF PHASE, NULL, VOLTS

FOR FLIGHT LINE, PRE-LAUNCH, MAINTENANCE

NORTH ATLANTIC PHASE ANGLE VOLTMETER

in one portable package, provides direct reading of **in-phase volts, quadrature volts, phase angle, nulls — without accessory equipment.** Compact, rugged and **unaffected by harmonics**—it simplifies support systems, reduces human error in test, adjustment, analysis of complex electronics.

Its accuracy and versatility (1 mv to 300 v, 0—360°) have been demonstrated in the Atlas, Polaris, Pershing and F-105 programs. It can be supplied for single frequency or broadband measurements, for dolly or console mounting, or as a module for complete checkout systems. **For full specs, write for Bulletin 201.**

Model 202BR,
used with Sperry SP30 Flight Director
5½" by 19" x 7½"

NORTH ATLANTIC
industries, inc.
603 Main Street, Westbury, N.Y.
EDgewood 4-1122

CIRCLE NO. 189 READER SERVICE CARD

potter

Teflon-Foil and Metallized Teflon

CAPACITORS

- Up to 300°C!
- Only 1% drift
- 50% reduction in size

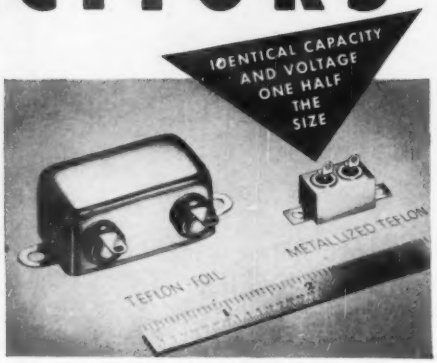

Typical Performance Characteristics

1—Very high insulation resistance (One million megohms per microfarad at 25°C).

2—Standard Temperatures −55°C to 200°C. Specials up to 300°C.

3—Close tolerance available to ±½% (±10% standard).

4—Low dissipation factor, less than .05% at 25°C.

5—Low capacity drift with temperature (−100 PPM per degree C).

6—Minimum dielectric absorption (Less than .05%).

Typical Size of Metallized Teflon Capacitor

RATING: 115 v, 400 cps at 200°C. continuous, .5 mfd.
SIZE: 1⅛"x1"x1⅛"

Photo at right shows Potter Capacitor using Teflon dielectric furnished Grimes Mfg. Co. for aircraft anti-collision light application.

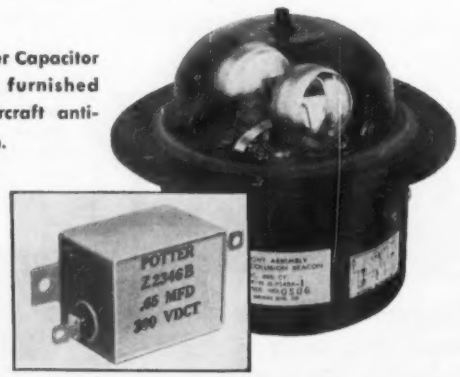

**Teflon is a DuPont Trade mark*

Write for Bulletin E9

THE potter COMPANY
Specialists in Layer Wound Capacitors Since 1925
1950 SHERIDAN ROAD, NORTH CHICAGO, ILL.

sensor may be mounted independent of the indicating meter to minimize panel space. The sensor unit weighs 2 lb, is compact (approximately 10 cu in.) and is potted for ruggedization. The meter has been temperature-compensated and needs no calibration in the field.

CIRCLE NO. 374 READER SERVICE CARD



Pressure Transducer low range

TABER INSTRUMENT CORP., North Tonadanda, N. Y. A new low range pressure transducer measures corrosive gas and liquid pressures up to 200 psi. Fast accurate responses (1 millsec) to dynamic pressures result from the small pressure cavity and bonded strain gage construction. Measuring element is a bonded strain gage-proving ring. Pressure on the proving ring sets up strains in the ring which are transmitted to the strain gages. This produces a linear electrical output signal proportional to the pressure. Such signal may be used for either control or measurement in the most precise of systems. The measurement system is relatively insensitive to spurious responses.

CIRCLE NO. 375 READER SERVICE CARD

Frequency Standard encapsulated

ARKAY ENGINEERING, INC., 225 Santa Monica Blvd., Santa Monica, Calif. Series RK200 encapsulated

★★★★★ ★★★★★

IN EVERY FIELD, THERE IS ONE FOREMOST NAME . . . IN SONIC ENERGY, THAT NAME IS BENDIX

RADIOISOTOPES PROVE EFFICIENCY OF BENDIX SONIC ENERGY CLEANING

How clean is clean? For *some* parts and assemblies cleanliness is highly critical, and visually clean surfaces—even microscopically or chemically clean surfaces, may not be clean enough!

A prominent manufacturer of electronic data processing and computing equipment had this problem. Circuit boards, which tested satisfactorily, failed later in the field. Suspecting hidden traces of contamination left from his conventional cleaning methods, the manufacturer sought help from the Bendix Sonic Energy Applications Laboratory.

There, using a radioisotope test (Bendix has pioneered this method of testing Sonic Energy Cleaning effectiveness), minute quantities of soldering flux — enough to absorb moisture and short-cut the circuitry—were discovered even after thorough conventional cleaning.

The boards were then cleaned by the Bendix Sonic Energy method. The radioisotope test results showed that Bendix Sonic Energy Cleaning, using an inexpensive water-based detergent solution, completely removed all the flux that caused the problem.

If cleanliness is critical in your manufactured parts or assemblies, or if you have a particularly tough cleaning job, it will pay you to investigate the possibilities inherent in Bendix Sonic Energy Cleaning.

FREE! ALL THE FACTS ON SONIC ENERGY CLEANING AT YOUR FINGERTIPS

Is Sonic Energy Cleaning economical for your operation? Find out for yourself with the Five-Step Plan outlined in this report. All processes fully detailed . . . case history results analyzed . . . the complete story of this remarkable new method of industrial cleaning. Write for your copy: PIONEER CENTRAL DIVISION, BENDIX AVIATION CORPORATION, 2735 HICKORY GROVE ROAD, DAVENPORT, IOWA.

Bendix AVIATION CORPORATION

SONIC ENERGY CLEANING

CIRCLE NO. 237 READER SERVICE CARD

solid state standards use a new circuit principle to provide any single pulse rate and/or square wave frequency. An external tuned amplifier can produce a sinusoid. Pulse rate is 120 cps to 100 kc; square wave, 60 cps to 50 kc. Pulse output is +1.0 v minimum into 5 K; square wave, 5 v peak into 50 K.

CIRCLE NO. 376 READER SERVICE CARD



Enclosure System
modular frame

AMCO ENGINEERING CO., 7333 W. Ainslie St., Chicago 31, Ill. The new aluminum modular frame system has many advantages in versatility, stocking programs, environmental, antimagnetic, airborne, weatherproofing and unusual size enclosure applications. Members are available from 7 in. to 20 ft in width, height or depth. A complete range of standard ½ in. aluminum panels, plain or painted, conforming to EIA mounting standards is available as well as side, top and bottom panels. Special panel sizes on request.

CIRCLE NO. 377 READER SERVICE CARD



Trimming Pot
highly stable

AERO ELECTRONICS CORP., 1745 W. 134th St., Gardena, Calif. Model 927 miniature wirewound trimming pot has a stability of 60 ppm to 190

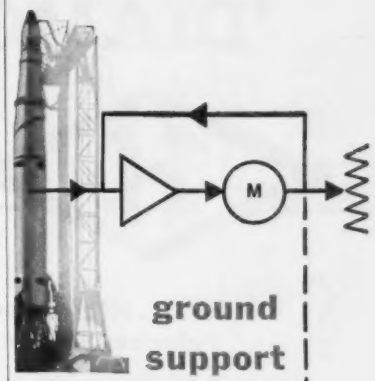

ground support instrumentation for RATIO TEMPERATURE RPM

NORTH ATLANTIC SERVO INDICATORS

are self-contained null-balancing measurement systems designed to indicate or monitor virtually any quantity that can be expressed as a voltage. Their high accuracy (to 0.05%) and fast response (as little as 0.2 second full scale) meet the most critical ground support requirements.

Ratio indication is unaffected by changes in transducer excitation. Compact, single-package design permits remote dolly, console, or rack mounting, maximum application flexibility.

Available, to specifications, for particular function, range or input signal, with dial, counter or dual pointer display, auxiliary output for repeating, signaling or control. **For full data, write for bulletin.**

Model SBI-201, 7" x 3" dia., used in missile prelaunch monitor system to indicate position of control surfaces.

NORTH ATLANTIC *industries, inc.*
603 Main Street, Westbury, N.Y.
EDgewood 4-1122

CIRCLE NO. 191 READER SERVICE CARD

'DIAMOND H' RELAYS

NEW . . . High Speed Polarized Relays

Fast action with freedom from bounce, plus high sensitivity and consistent operation with low distortion, are provided by small, rugged Series P Polarized Relays. SPDT, with two independent coils, they will handle over 1,000 pulses per second. Various coil resistances up to 5,000 ohms each coil. Contact ratings vary with switching speed but range from 60 MA to 2A with voltages to 120 AC or DC, dependent upon amperages employed.

Aircraft-Missile Series R & S Relays

Miniature, hermetically sealed 4PDT, Series R & S relays provide excellent reliability over their long service life. Electrically and physically interchangeable, the two series differ only in that Series S coils are separately sealed within the sealed cases, with organic matter eliminated from the switch mechanism for greatest reliability in dry circuits. Contacts MA to 10 A.

Special Mountings

Series R/S Relays are available with 10 standard mounting arrangements, plus a ceramic plug-in socket. MS-AN type connector mounting, illustrated at right, makes assembly, installation and field service extremely simple, while the connector provides a seal against moisture.



"Diamond H" engineers are prepared to work with you to develop variations on these relays to meet your specific requirements. Tell us your needs . . . by phone or letter.

THE **HART** MANUFACTURING COMPANY

202 Bartholomew Ave., Hartford 1, Conn.

Phone JAckson 5-3491

C. Unit takes 3.5 w at 30 C, and will handle 0.35 w at 175 C; withstands 30 g vibration at 2,000 cps; passes MIL-STD 202, method 106, for moisture resistance; resistance range, 100 ohms to 100,000 ohms; size, 1.25 in. long by 0.24 in. wide by 0.33 in. high.

CIRCLE NO. 378 READER SERVICE CARD



UHF Transmitter small and light

ELECTRONIC COMMUNICATIONS, INC., St. Petersburg, Fla. Model 28 is a 1 kw uhf (225-400 mc) transmitter for airborne communications and other applications. It is 15 in. high, 30 in. wide, 27 in. deep and weighs less than 200 lb. Unit is self-contained, operates from a primary power source of 380 to 1,200 cycles and is shielded against radiated and conducted r-f noise.

CIRCLE NO. 379 READER SERVICE CARD

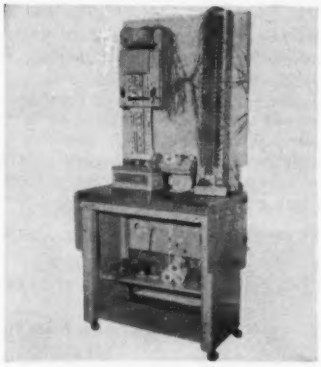

Fact Finding Lab simple to use

ALDEN SYSTEMS CO., Alden Research Center, P. O. Box 125, Westboro, Mass., announces the new fact finding laboratory. It contains all the tools necessary to get the facts, backed up with permanent recording on any physical motion, action or change. The lab is a

NEW

Precision Scientific Model 75 • Model 150 VACUUM PUMPS

. . . now available with GAS BALLAST



Allowing you to evacuate systems containing moisture or other condensible vapors without need of a cold trap or other complete setup.

How It Works

A check valve on compression side of exhaust stage admits controlled amount of air at atmospheric pressure to exhaust undesirable vapors and prevent pump oil contamination.

New Versatility

Use closed with normal vacuum systems and open with contaminated systems. Ultimate vacuum closed is 0.1 microns. Ultimate vacuum open is 5 microns (depending on contaminant present).

All Precision Advantages

Modern design provides greater pumping efficiency at low pressures, more capacity for your investment, compact design and quiet operation.

See For Yourself

For a demonstration without cost or obligation, call your distributor or Precision district office.

Since 1920

The Finest in Quality Laboratory Apparatus

PRECISION SCIENTIFIC CO. PS

3739 W. CORTLAND ST. CHICAGO 47, ILL.

Local offices in Chicago, Cleveland, Houston, New York, Philadelphia, San Francisco

CIRCLE NO. 251 READER SERVICE CARD

complete package with the Alden 30 channel recorder, paper take-up, indicating power supply, 2 channel recorder with extra magazines, direct reading time and money device, Alfax paper, motion switches, extension cords, mobile work center, detecting floor cushion, detecting seat mats, mercury switches, electric photocells, and other accessories. It can be operated by nontechnical personnel.

CIRCLE NO. 380 READER SERVICE CARD

Variable Capacitor many applications

PLASTIC CAPACITORS, INC., 2620 N. Clybourn Ave., Chicago 14, Ill. The Brad-Cap variable capacitor has a maximum capacitance of as much as 4.4 μf. It is ideal for many applications, including wide range R-C or L-C circuits; adjustable capacity standards; integrating circuits; ferroresonance circuits; low and high pass filters. Temperature range for operating and storage is −20 C to 100 C; voltage range, 200 v a-c/400 v d-c.

CIRCLE NO. 381 READER SERVICE CARD

Thermostat for missiles

VALVERDE LABORATORIES, 252 Lafayette St., New York 12, N. Y. Now serving in missile and other vital airborne components, the new VAL90 miniature snap action, pre-

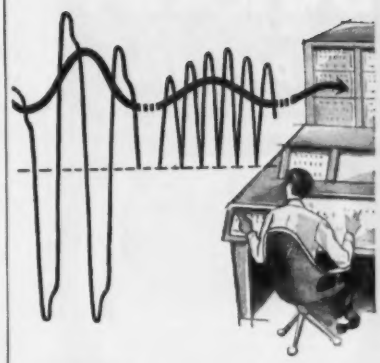

NOW— AC TO DC CONVERSION UNAFFECTED BY HARMONICS

IN PRODUCTION, LABORATORY OR IN THE FIELD

North Atlantic Phase Sensitive AC to DC Converter

makes available, for the first time, the precision and flexibility that permits DC instruments to be used for measurement of complex AC signals. Freedom from harmonic effects, plus variable phasing control, allow **accurate DC readout of total, fundamental, in-phase and quadrature** component of any signal.

Broad dynamic response, excellent linearity and choice of single- or double-ended output make the Model 401 readily applicable to digital voltmeters, DC ratiometers, electronic analog to digital converters and data handling systems. Available for specified frequencies from 30 to 5000 cps, in portable, bench or rack-mount models—or as a module for automated checkout systems. **For full specs, write for Bulletin 401.**

Model 401
5¼" x 19" x 8½"

NORTH ATLANTIC *industries, inc.*

603 Main Street, Westbury, N.Y.
EDgewood 4-1122

CIRCLE NO. 193 READER SERVICE CARD

DURANT
MFG. CO.
Specials
For RADAR, ELECTRONIC and INSTRUMENT APPLICATIONS



High speed, non-reset, direct reading counter to indicate increment of measurement in radar navigation instruments.



High-speed dual bank counter for use in navigating instruments. Shutter operates to close off either bank when in the minus side.



Counter assembly component of navigating instrument to indicate increments of measurement for fast, legible, direct "read-out".



Special counter for use on Tape Recorder to indicate the position of tape passing through the recorder.

Direct reading counter for navigating and directional instruments. Unit wheel graduations permit reading of 150,000 increments per minute.

Booth 817—ISA Show
Representatives in Principal Cities
WRITE FOR LITERATURE
DURANT MANUFACTURING CO.
1912 N. Buffum St. Milwaukee 1, Wis.
12 Thurbers Ave. Providence 5, R. I.

PRODUCTIMETERS
SINCE 1879 *Count Everything*

cision set, sealed thermostat has been designed for reliability under vibration and shock even after months of shelf life. Normally preset up to 350 F with a differential of 3 F or better and a setting tolerance of ±3 F the capacity is 40 w 30 v and 100 w 120 v a-c/d-c noninductive and for dry circuits. Weight is under 0.2 oz.

CIRCLE NO. 382 READER SERVICE CARD



Sealed Relay
1 in. sq, 1½ in. high

HI-G, INC., Bradley Field, Windsor Locks, Conn. ESS series hermetically sealed relay meets vibration of 20 v to 2,000 cps with a sensitivity of 80 mw in a 2pdt unit. Coil resistances as high as 36,000 ohms are available, and a-c units using full wave or half wave rectifiers may be obtained. Contacts are rated at 2 amperes resistive for a life of 100,000 cycles. Relay is suitable for use at ambient temperatures up to +125 C.

CIRCLE NO. 383 READER SERVICE CARD

Video Detector Mount
filter and crystal

AMERICAN ELECTRONIC LABORATORIES, INC., 116 N. Seventh St., Philadelphia 6, Pa. Filter and crystal video detector mount has a pass band of 2.6 to 3.25 kmc with insertion loss of less than 1.4 db within the band. Combination weighs approximately 3 oz, with tangential sensitivity—57 dbm measured with a 2 mc video band-

USE STONITE CUSTOM-MADE COILS!
ASSURE SAFETY, LONG LIFE



For industrial, electronic and armed forces applications, STONITE coils are designed and engineered to strictest specifications.
Here is outstanding manufacturing versatility, covering this wide range of STONITE custom-made coils:

PAPER SECTION • FORM WOUND • LAYER BOBBIN
PRECISION WINDING • HIGH TEMPERATURE COILS
COPPER AND ALUMINUM CONDUCTORS
Round—Square—Rectangular
Also Round, Square, Rectangular tubing

SPECIFY *Stonite*
These influentials tell why
- BOUNDLESS EXPERIENCE, QUALITY CONTROL
- WIDEST SIZE RANGE, ANY QUANTITY
- TOP RESEARCH, ENGINEERING FACILITIES
- FINEST MATERIALS, WINDING SERVICES, ADVANCED TOOLING
- CONTINUOUS PROCESSING CHECKS, RIGID INSPECTIONS
- WIDEST, MOST VERSATILE RANGE OF APPLICATIONS

Write, describing your require ment and request a sales en ineer call. Also ask for the illustrated STONITE brochure S-30.

Stonite
COIL CORPORATION
ROUTE #130
YARDVILLE 3, NEW JERSEY
JUniper 7-7323

CIRCLE NO. 252 READER SERVICE CARD

width using an MA408B crystal. Input is matched to a 50 ohm line and both input and output utilize Microdot miniature coax connectors.

CIRCLE NO. 384 READER SERVICE CARD

Hall-Effect Device
high resolution

OHIO SEMICONDUCTORS, INC., 1035 W. Third Ave., Columbus 8, Ohio. Halltron type HR-31 utilizes a thin wafer of indium arsenide to provide a high output voltage over a wide temperature range. Output decrease is 10 percent when the element temperature is changed from 0 deg C to + 100 C. Temperature coefficient is essentially constant at 0.1 percent per deg in this range. Use of the HR-31 is recommended in flux measuring equipment, analog multipliers, power meters and many other applications where very low temperature dependence is a necessity.

CIRCLE NO. 385 READER SERVICE CARD



Circuit Breaker
subminiature

SYLVANIA ELECTRIC PRODUCTS INC., Salem, Mass., has developed a subminiature electrical circuit breaker that is vacuum sealed in a glass envelope. Called the Mite T Breaker, the low-cost device provides circuit protection by interrupting current flow when excessive

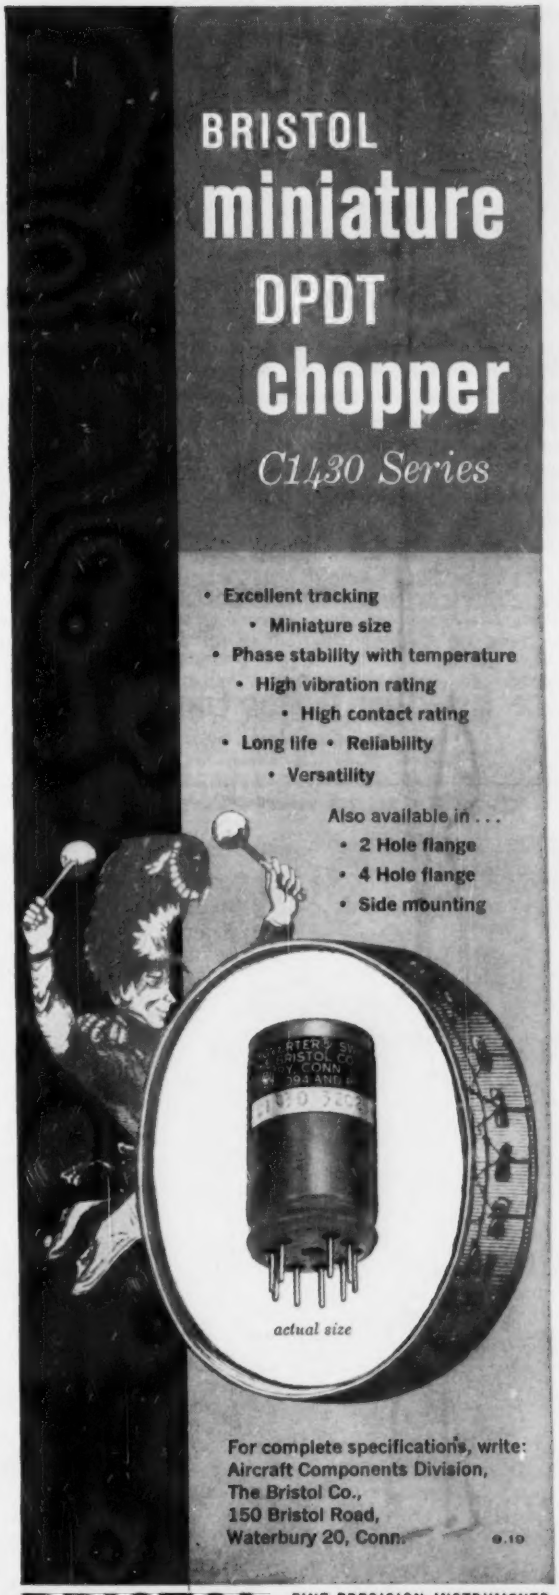

CIRCLE NO. 195 READER SERVICE CARD

"Work Horse" of the Electronics Industry

DC MILLIAMMETERS

—by Esterline-Angus



The high sensitivity of these rugged, reliable DC Milliammeters provides the convenient, time-saving way to obtain accurate information . . . portray it in easily understood form . . . and record it permanently, without human error. They are ideal for recording quantities that are difficult to picture in any other way or are too tedious and time-consuming to be plotted manually.

Some of the many industrial, scientific and professional uses of Esterline-Angus D C Milliammeters: electronic gages, nuclear studies, tracer element studies, performance tests, air samplers, trouble shooting, life tests, audiometers, photronic devices. **Send for Catalog Section 42 for detailed specifications.**

The Esterline-Angus Company, Inc.

More Than 50 Years Manufacturing Graphic Instruments
Dept. E, P. O. Box 596, Indianapolis 6, Indiana

CIRCLE NO. 253 READER SERVICE CARD

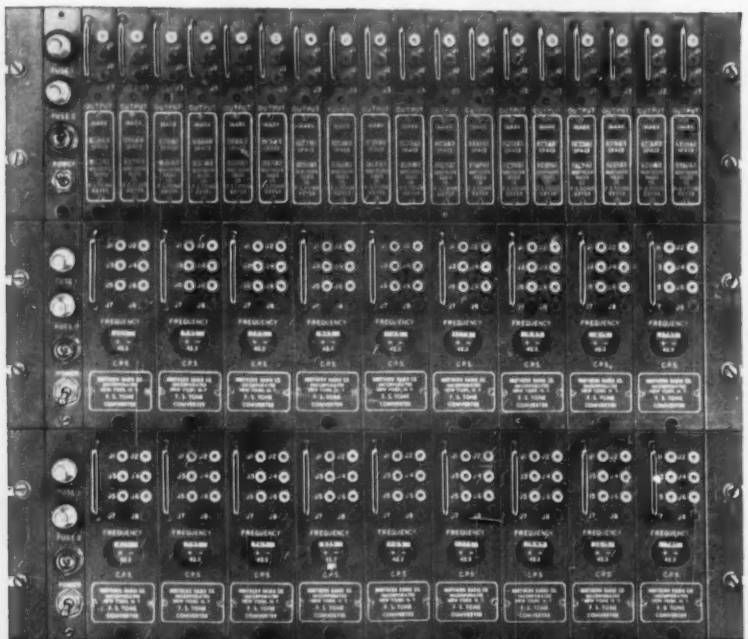

Northern Radio

ALL-TRANSISTOR VF Carrier Telegraph System

18 CHANNELS in 15¾" panel space

Write on your letterhead for literature to Dept. RS

NORTHERN RADIO COMPANY, INC.
147 W. 22nd Street, New York 11, N. Y.
Pace Setters in Quality Communications Equipment

In Canada: Northern Radio Mfg. Co. Ltd., 1050 Bank St., Billings Bridge, Ottawa, Ontario

current or external heating occurs. As temperature decreases or the overload is removed, the current path is automatically reset. A wide variety of potential uses include the diversified control systems of today's highly automated industries.

CIRCLE NO. 386 READER SERVICE CARD

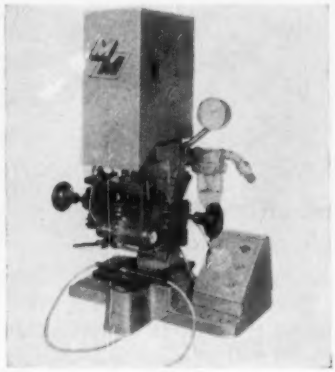

Marking Machine
air-operated

MARKEM MACHINE CO., Keene 75, N. H. Tubing from size No. 12 up to ½ in. in diameter can be marked on the new model 1002 marking machine. Unit has a specially designed work table with a tubing guide to assure proper location of the tubing for imprinting. Tubing is pulled through the guide and cut off manually. Engraved type-wheels make imprints up to 22 characters wide or 2⅛ in. maximum length; imprint changes are made almost instantly by rotating the type-wheels with turning pinions to select the desired imprint. Heated type and ink make imprints that become part of the material when marked and will not scrape or rub off.

CIRCLE NO. 387 READER SERVICE CARD



Power Supply
semiconductor type

MID-EASTERN ELECTRONICS, INC., 32 Commerce St., Springfield, N. J. Model ME36-5EM power supply

features a magnetic line voltage regulator and a transistorized regulator circuit. The line voltage regulator causes the voltage across the transistors to drop to zero when the output is shorted, thus minimizing the amount of power the transistors must dissipate. The transistorized regulator permits a recovery time of less than 50 μsec with overshoot less than 1.0 percent of the voltage setting. Output voltage is 0 to 36 v continuously variable, with vernier control, at 0 to 5 amperes d-c.

CIRCLE NO. 388 READER SERVICE CARD

Aircraft Blower meets MIL-E-5272A

THE TORRINGTON MFG. CO., Torrington, Conn. MSA-10569 cooling blower is being applied in complex ground support facilities for calibrating critical aircraft equipment. Unit will deliver 25 cfm of air against a static pressure of 8 in. of water. It is provided with a 115-v single-phase 400-cps aircraft motor and weighs about 4 lb.

CIRCLE NO. 389 READER SERVICE CARD



Floated Rate Gyros high-accuracy

KEARFOTT CO., INC., 1500 Main Ave., Clifton, N. J. Series 2500 miniature floated rate integrating gyros, designed for use in missiles or other severe environments, are 2 in. in diameter and 2¼ in. long.

From the AMCI Catalogue

AUTOMATIC IMPEDANCE PLOTTERS

- *Continuous impedance display with frequency*
- *Available in portable and rack-mounted units*

Type	Frequency Range (mc)	Line Size
12	2.5-250	Type N
11-O	30-400	Type N
11-PS	180-1100	Type N

SLOTTED LINES

- *Residual swr under 1.010*
- *Rated error in detected signal under 1.005*
- *Available with a wide variety of tapered reducers*

Type	Frequency Range (mc)	Impedance (ohms)
1026-13	50-3000	50 or 75
1026-8	75-3000	50 or 75
1026-6	100-3000	50 or 75
1026-4	150-3000	50 or 75
1026-2	300-3000	50 or 75

COAXIAL SWITCHES

- *High power ratings; swr under 1.06*
- *Pressurized*
- *Motor-driven and manually operated models*

Type	Frequency Range (mc)	Line Size
1038	0-450	6⅛″
1136	0-500	3⅛″
Very high peak power models for radar applications		
1038-HV	0-450	6⅛″
1136-HV	0-500	3⅛″

INSTRUMENT LOADS

- *High stability; very low swr*
- *Nearly all transmission line sizes*

Type	Frequency Range (mc)	Line Size	Max SWR
1108B	0-1100	Type N	1.02
2120	0-1000	⅞″	1.03
1112	0-1000	1⅝″	1.03
1110	0-650	3⅛″	1.03

HYBRIDS

- *Very broad band*
- *Very low residual unbalance*

Type	Frequency Range (mc)	Max. SWR	Residual Unbalance (db)
1027-K	60-120	1.4	−50
1027-L	120-240	1.4	−50
1027-M	240-480	1.5	−50
1027-N	480-960	1.6	−50
1098	960-1600	1.6	−40
1102	1600-2400	1.5	−40
1104	2400-3600	1.5	−34
1100-K	60-120	1.4	−55
1100-L	120-240	1.4	−55
1100-M	240-480	1.5	−55
1100-N	480-960	1.6	−55
1099-N	800-960	1.2	−50
1099-O	975-1175	1.2	−50
1024	TV Channels 2-13	1.05	−50

OTHER PRODUCTS

TAPERED REDUCERS
LINE STRETCHERS
DIPLEXING FILTERS
VOR ANTENNAS
TV BROADCASTING ANTENNAS — directional and omnidirectional
ADJUSTABLE MATCHING NETWORKS
IMPEDANCE STANDARD LINES

ANTENNA SYSTEMS — COMPONENTS — AIR NAVIGATION AIDS — INSTRUMENTS

AMCI ALFORD *Manufacturing Company*
299 ATLANTIC AVE., BOSTON, MASS.

measure down to

0.03 μv

The Keithley 150 sets a new standard of sensitivity for dc voltmeters. Typical uses include output measurements from strain gages, thermopiles and ion chambers, as well as Hall effect studies, corrosion work and molecular weight analysis.

Functions and measurement spans of the 150 are: dc voltmeter, 1 microvolt to 1 volt full scale; ammeter, 10^{-3} to 10^{-10} ampere full scale; dc amplifier, gains of 10 to 10^{7}; and null detector, with 0.5 to 2 second response. Features include:

- **zero stability** as a voltmeter within 0.1 microvolt per day; as an ammeter, within 2 x 10^{-11} ampere per day.
- **zero suppression** up to 100 times full scale.
- **optional** floating or grounded input.
- **short term noise** within 0.03 microvolt peak to peak (0.006 microvolt RMS).
- **rugged construction,** relative insensitivity to vibration, 60-cycle fields, or thermal EMF's.

Write today for your copy of Keithley Engineering Notes, Vol. 7 No. 1 describing the Model 150.

KEITHLEY INSTRUMENTS, INC.
12415 Euclid Ave., Cleveland 6, Ohio

Design combines torque motor and signal generator in single unit "torsyn" with restraint-trimming tertiary winding. A variety of performance characteristics are available. Units operate at any altitude. Standard deviation (short term): azimuth, 0.05 deg/hr; vertical, 0.03 deg/hr. Max. drift rate: 0.015 deg/hr/g^2 steady accel.; 0.008 deg/hr/g^2 vibratory accel.; warmup time: 10 minutes from −60 F; weight: 0.7 lb; life: 1,000 hr.

CIRCLE NO. 390 READER SERVICE CARD



Speed Clip fastens p-c board

TINNERMAN PRODUCTS, INC., Cleveland, Ohio. One-piece speed clip to space and fasten printed circuit boards to chassis. Made of spring steel, it is self-retained in fastening position by bowed spring legs which snap into place and lock on the underside of the chassis. When clips are in place, circuit board is positioned, screws are inserted through board and between clip legs into chassis. Clips provide more than half-inch clearance between circuit board and chassis.

CIRCLE NO. 391 READER SERVICE CARD

Miniature Pot humidity proof

NETWORKS ELECTRONIC CORP., 14806 Oxnard St., Van Nuys, Calif. Nec-Pot miniature wirewound pot is 100 percent humidity proof. Hermetically sealed all-glass case provides visual inspection and adjustment of wiper. Units are supplied with resistances of 100 ohms

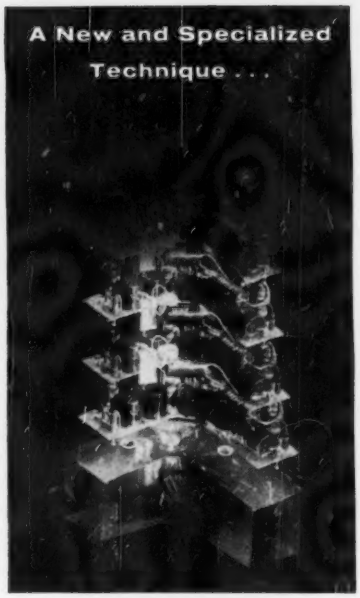

CUSTOM PACKAGING

by General Electric

Specialized defense requirements necessitate new packaging techniques for electronic circuit modules. Working from schematics or performing the entire design task from customer requirements, General Electric creates small lightweight, high-density components. Engineering and production staffs skilled in new packaging techniques deliver tested prototypes in four to six weeks.

With *maximum environmental stability, lower noise* and *higher signal levels,* applications for such electronic packages as inverters, flip-flops, encoders, amplifiers, exist throughout the military market. Where the advantages of *modular replacement* over technical field repair are of the utmost importance, the high-density volume efficiency of these circuit modules is the answer to extreme space limitation.

For more information on Custom Packaging, write to Defense Industries Sales, Section 227-27D

DEFENSE ELECTRONICS DIVISION
HEAVY MILITARY ELECTRONICS DEPARTMENT
GENERAL ELECTRIC
SYRACUSE, N. Y.

CIRCLE NO. 254 READER SERVICE CARD

to 30 K ohms, ±2 percent. Linear range is 5 to 95 percent of total resistance; and resistance, 1 percent; insulation resistance, 500 megohms minimum; operates from −55 C to +225 C.

CIRCLE NO. 392 READER SERVICE CARD



Solid State Relay
spst device

CURTISS-WRIGHT CORP., Inter Mountain Instruments Division, P. O. Box 8324, Albuquerque, N. M. Model SSR-6-250 is a 6 v, ½ ampere, spst solid state relay for aircraft, missile and other high environment d-c power switching applications. It has no moving parts. Pickup time is 2 μsec and dropout, 5 μsec. It can withstand shocks of 1,000 g. Price is $55.

CIRCLE NO. 393 READER SERVICE CARD



A-C Amplifier
all-transistor

DYNAMICS INSTRUMENTATION CO., 1118 Mission St., South Pasadena, Calif. Model 1634 linear instrument amplifier with integral power supply. Voltage gains are 1 to 100 with 100,000 ohm input impedance in a low-noise all-transistor design. Frequency response of 2 cps to 100,000 cps (±0.5 db) is compatible with other elements of modern instru-

New Working Aids
from McGraw-Hill

ELECTRONIC COMPONENTS HANDBOOK, Vol. III

Just Published—Gives designers of military and commercial electronic equipment information they need to select and use components which perform with maximum reliability. Provides data on transformers and inductors, connectors, wire and cable, terminals, tube shields, hardware, and other components. While emphasis is on types for which military specifications are available, other types also are included. Military specifications are clearly summarized. **Edited by Keith Henney, Harry Mileaf, and Craig Walsh, Technical Writing Service, McGraw-Hill Book Co. Electronic Components Laboratory, Wright Air Development Center. 180 pp., 8½ x 11, 156 illus. $10.00**

Also see the **Electronic Components Handbook Library**, combining Volumes I, II, and III to form a complete, authoritative source of working information for the electronics designer. In addition to the components covered in Volume III, the Library gives you ready reference to resistors, capacitors, relays, switches, power sources and converters, fuses and circuit breakers, instruments, choppers, transmission lines and waveguides, and other topics. **Easy terms enable you to use the Library while paying for it—only $6.50 in 10 days and $5.00 a month until the Library price of $31.50 is paid.**

TWO-WAY RADIO

Just Published—Complete guide to two-way radio—from its practical uses to technical information on both AM and FM transmitters and receivers, circuits, selective calling methods, antennas, power supplies, installation, and servicing. Covers digital pulse codes, power sources, transmitter tuning, phase-shift modulators, split-channel operation, and other topics. Describes such recent developments as synchronous AM and single sideband. **By A. Lytel, Avco Mfg. Co., Crosley Div. 304 pp., 283 illus., $9.50**

MODERN NETWORK ANALYSIS

Just Published—Gives you a working knowledge of the general properties of networks. Covers network concepts, relation between the steady state and transient response characteristics, response of networks to singularity functions, the system function, and other topics. Clearly discusses such aspects as network stability, natural modes, and specific properties of networks containing elements of only two types. **By F. M. Reza, Syracuse Univ., and S. Seely, Case Inst. of Tech. 400 pp., illus., $10.00**

DIGITAL AND SAMPLED DATA CONTROL SYSTEMS

Just Published—Guide to analysis and design of digital and sampled-data control systems—for solving problems in such fields as process control and electronic computers. Covers theory of sampling and quantizing, z-transform analysis, analog digital conversion, and related topics. Latest developments are clearly discussed, including systems with finite sampling duration and those with non-synchronized samplers. **By J. T. Tou, Purdue Univ. 631 pp., 406 illus., $15.00**

INSTRUMENTATION IN SCIENTIFIC RESEARCH

Electrical Input Transducers

Just Published—A complete collection of basic methods and systems used as input transducers in electrical instrumentation. Virtually all transducers for mechanical, thermal, magnetic and electrical quantities, and optical and nuclear radiation are covered. For each transducer the book describes physical mechanisms, relationships between input and output, applications and limitations, errors, response to environmental influences, and other aspects. **By K. S. Lion, Mass. Inst. of Tech. 310 pp., 297 illus., $9.50**

DIGITAL COMPUTING SYSTEMS

Just Published — Full coverage of digital computing systems: principles, design, operation, and applications. Describes the elements in modern computers, explaining underlying principles of the devices used and illustrating the devices themselves. The circuitry by which the elements perform desired functions is clearly covered, with examples of typical circuits. Logical design and programming are discussed, and how computers solve scientific, business, and data handling problems is shown. **By S. B. Williams, Consultant Dept. of Defense. 231 pp., 168 illus., $7.75**

SUCCESSFUL TECHNICAL WRITING

Articles, Papers, Reports, Instruction and Training Manuals, and Books

Just Published—Step-by-step methods to guide you in any technical, engineering, or scientific writing job. Shows where to look for ideas, how to evaluate them, build an outline, write up the idea, and work with editors and publishers to get into print. **By T. G. Hicks, author, editor, engineer, instructor at Cooper Union. 287 pp., 30 illus., $5.50**

MAIL COUPON FOR 10-DAY FREE EXAMINATION

McGraw-Hill Book Co., Dept. L-9-11, 327 W. 41st St., N.Y.C. 36

Send me book(s) checked below for 10 days' examination on approval. In 10 days I will remit for book(s) I keep plus few cents for delivery costs, and return unwanted book(s) postpaid. (We pay delivery costs if you remit with this coupon—same return privilege.)

- ☐ Henney, et al—**Electronic Components Handbook, Vol. III,** $10.00
- ☐ Henney, et al—**Electronic Components Handbook Library,** $31.50
- ☐ Lytel—**Two-way Radio,** $9.50
- ☐ Reza & Seely—**Modern Network Analysis,** $10.00
- ☐ Tou—**Digital and Sampled-data Cont. Sys.,** $15.00
- ☐ Lion—**Instrumentation in Scien. Res.,** $9.50
- ☐ Williams—**Digital Computing Systems,** $7.75
- ☐ Hicks—**Success. Tech. Writing,** $5.50

(PRINT)
Name .....
Address .....
City ..... Zone.... State.....
Company .....
Position .....

For price and terms outside U. S., write McGraw-Hill Int'l., N.Y.C. L-9-11

FOUR BRIDGES IN ONE

MODEL 291

universal IMPEDANCE BRIDGE

Measure:

1. RESISTANCE TO 0.1% 0-1200 kilohms in seven ranges
2. CONDUCTANCE TO 0.1% 0-1200 millimhos in seven ranges
3. CAPACITANCE to 0.2% 0-1200 microfarads in seven ranges
4. INDUCTANCE TO 0.3% 0-1200 henrys in seven ranges

PRICE: $995.00 For complete information on the Model 291 Universal Impedance Bridge, send for ESI catalog sheet C-13.

OREGON CALLS! Looking for growth potential, plus great outdoor family living? ESI has immediate openings for experienced design, circuit, electro-mechanical and applications engineers. Contact C. Davis.

esi

ELECTRO-MEASUREMENTS, INC.

7524 S. W. MACADAM • PORTLAND 19, OREGON

mentation systems such as wide-band magnetic tape recorders. Cables up to 2,000 $\mu\mu$f can be driven without signal distortion up to 50,000 cps.

CIRCLE NO. 394 READER SERVICE CARD



V-Dot Indicators reusable devices

INERTIA SWITCH, INC., 311 W. 43 St., New York 36, N. Y. Designed primarily for use in shipping missiles, electronic parts and other delicate instruments, V-dot indicators determine if rough or careless handling has caused a shock to the shipment. They give visible indication when shock has exceeded a predetermined permissible limit. Devices have complete spherical sensitivity. Units are also available having one or two plane sensitivity with an accuracy of 5 percent of preset value; available from 5 g to 75 g, in standard models; meet typical military environmental specs.

CIRCLE NO. 395 READER SERVICE CARD

Battery Holders insulation pretested

ACME MODEL ENGINEERING CO., 6224-15th Ave., Brooklyn 19, N. Y. Over 140 different sizes of battery holders feature impregnated fibre washer insulation, spring tempered aircraft aluminum, standard mounting holes, nickel plated brass

"YOU CAN'T PUT NIAGARA FALLS IN A SPACE SHIP."

Yet the power output of Niagara approximates that which is needed for an "Astronaut" to communicate with earth as he is millions of miles away heading for another planet. Challenging problems such as the development of an alternate source of power for communications are typical of the exciting work now being undertaken at Convair-Astronautics. The enormity and variety of these problems afford electronic engineers at Astronautics an opportunity to pursue tasks that are truly their own, providing an abundance of personal and professional satisfaction.

If you are an

ELECTRONIC ENGINEER

with a record of professional accomplishment there is an important position awaiting you at Convair-Astronautics – where the perimeter of man's knowledge is steadily being advanced.

Write now to: Mr. T. W. Wills, Engineering Personnel Administrator, Dept. 130-90

CONVAIR / ASTRONAUTICS

Convair Division of

GENERAL DYNAMICS

5616 Kearny Villa Road, San Diego, Calif.

...and now for a spot of welding!

Still at it? Trying to improve potentiometer reliability by building 'em yourself? Well, you're on the right track about *one* thing — welding's a sure way to eliminate a lot of operational headaches — like gassing contamination of contact metals at high temperature, from organic solder flux. No chance of "cold joints", either, to increase circuit resistance. No soldered connections to come loose under vibration and shock. Welding *is* the way to reliability!

But why set the wife's drapes afire to get a reliable, all-welded pot? Utilizing welding techniques, Ace produces reliable potentiometers operable at temperatures exceeding 150°C. and able to withstand 50 G's at 2000 cycles. All this, plus extremely low contact resistance and longer rated life. All taps, end connections, resistance elements, contact assemblies and terminal leads are specially prepared beforehand — then welded with pure nickel or palladium silver. So, for built-in reliability through sounder construction techniques, see your ACErep!



This 2" AIA Acepot® (shown ½-scale) incorporates all these exclusive welding construction features, for superior reliability.

ACE ELECTRONICS ASSOCIATES, INC.
99 Dover Street, Somerville 44, Mass.
SOmerset 6-5130 TMX SMVL 181 West. Union WUX

Acepot® Acetrim® Aceset® Aceohm® *Reg. Appl. for

202 CIRCLE NO. 202 READER SERVICE CARD

contacts, preadjusted tension for total contact and solder coated copper terminals.

CIRCLE NO. 396 READER SERVICE CARD

V-R Power Supplies all-semiconductor

TRANSISTOR DEVICES INC., 11 Hamburg Turnpike, Riverdale, N. J. A line of voltage-regulated power supplies feature regulation of 0.1 percent line or load; ripple, 2.5 mv maximum; multiple frequencies, usable from 60 to 400 cps. They are self-protected (short circuit proof), repairable (not sealed), and competitive in price.

CIRCLE NO. 397 READER SERVICE CARD

Resistor Kit multirange

INTERNATIONAL RESISTANCE CO., 401 N. Broad St., Philadelphia 8, Pa. Multirange resistor kit with five basic units delivers 200 fixed resistance values. Each has four separate 10-w wirewound resistors, encased in a common steatite housing. Resistors are of either two or four different values, each with its own pair of axial leads. Connection of leads in series, parallel, and series-parallel arrangements, provide up to 47 different values in a

Get out your pencil and help yourself to

electronics READER SERVICE

it's free—it's easy—
it's for your convenience

Use these handy READER SERVICE CARDS for more information on:

ADVERTISEMENTS—NEW PRODUCTS—
LITERATURE OF THE WEEK

1—Circle the number on the postpaid card below that corresponds to the number at the bottom of Advertisement, New Product item, or Literature of the Week selection.

2—Please print carefully, as it is impossible to process cards that are not readable.

A

FOR SPECIFIC ITEMS IN MULTI-PRODUCT ADVERTISEMENTS

For more information on specific items in multi-product advertisements, print carefully on the Reader Service Card below in Box "A" the circle number of the advertisement and the specific product(s) on which you desire more information.

HOW TO SUBSCRIBE—
HOW TO RENEW YOUR SUBSCRIPTION TO electronics

If you are not a subscriber, or if your subscription is about to expire, to receive **electronics** regularly, fill in the section "FOR SUBSCRIPTIONS" on a card below. Send no money, **electronics** will bill you at the address indicated on the Reader Service Card.

Correct amount of POSTAGE must be affixed for all FOREIGN MAILINGS

Correct amount of POSTAGE must be affixed for all FOREIGN MAILINGS

SEPT 11 • 59
CARD EXPIRES
NOV 11 • 59

electronics READER SERVICE CARD • Please Print Carefully

YOUR NAME _____ POSITION _____

COMPANY _____

ADDRESS _____

CIRCLE THESE NUMBERS WHEN INTERESTED IN ALL ITEMS SHOWN IN ANY ADVERTISEMENT

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42
43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63
64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84
85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105
106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126
127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147
148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168
169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189
190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210
217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237
244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264
271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291
298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318
325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345
352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372
379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399
406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426
433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453
460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480
487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507
514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534
541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561
568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588

211	212	213	214	215	216	
238	239	240	241	242	243	
265	266	267	268	269	270	
292	293	294	295	296	297	
319	320	321	322	323	324	
346	347	348	349	350	351	
373	374	375	376	377	378	
400	401	402	403	404	405	
427	428	429	430	431	432	
454	455	456	457	458	459	
481	482	483	484	485	486	
508	509	510	511	512	513	
535	536	537	538	539	540	
562	563	564	565	566	567	
589	590	591	592	593	594	

FOR SUBSCRIPTIONS:
(CHECK ONE BOX)

☐ NEW ☐ RENEWAL

(CHECK ONE BOX BELOW)

DOMESTIC ☐ 1 yr. — $ 6.00
☐ 3 yrs. — $12.00
CANADA ☐ 1 yr. — $10.00
FOREIGN ☐ 1 yr. — $20.00

Product(s) manufactured: _____

or Service(s) Performed: _____

A

Circle No.	Product
____	_____
____	_____
____	_____
____	_____

INSIDE FRONT COVER INSIDE BACK COVER

ONE!

In every industry there's always ONE accepted Product and Data Buying Book... in electronics it's the BUYERS' GUIDE — fundamental in any sales program aimed at the electronics and allied industries. Its 52,000 paid subscribers are important Design-Research/Production/Management Engineers, who, individually, or working in combination with one another, influence the purchase of products, materials and services... whatever is bought by the entire industry.

electronics

A McGRAW-HILL PUBLICATION

330 West 42nd Street • New York 36, N.Y.

BUSINESS REPLY MAIL

NO POSTAGE STAMP NECESSARY IF MAILED IN THE UNITED STATES

FIRST CLASS
PERMIT NO. 64
(SEC. 34.9 P.L.&R.)
NEW YORK, N. Y.

6¢ Postage Will Be Paid By
ELECTRONICS
Reader Service Dept.
330 West 42nd Street
New York 36, N. Y.

STODDART RADIO INTERFERENCE
AND FIELD INTENSITY MEASURING EQUIPMENT

covering a frequency range of 30 cps to 1000 mc



NM-40A (AN/URM-41)
30 cps to 15 kc

SELECTIVE OPERATION/Specifications

Sensitivity: For a one-to-one signal-to-noise ratio, the sensitivity of the NM-40A is better than 0.15 microvolt from 1000 to 15,000 cps, 0.25 microvolt from 300 to 1000 cps and 1.0 microvolt from 30 to 300 cps, when used as a selective two-terminal voltmeter with its narrowest bandwidth and an input impedance of 100,000 ohms.

Spurious Responses:

$2F_0'$ > 60db down from F_0
$3F_0'$ > 55db down from F_0
All others > 75 db down
} where F_0 is any input signal using selective operation

WIDEBAND OPERATION/Specifications

Frequency Response: 30 cps to 15 kcs, ±0.5 db.

Sensitivity: 15 microvolts sensitivity at input impedance of 100,000 ohms.
Input Impedance: 50, 600, 10,000 and 100,000 ohms.
The NM-40A may also be used as an ultra-sensitive AUDIO frequency WAVE ANALYZER.

NM-10A (AN/URM-6B)
14 kc to 250 kc

GENERAL SPECIFICATIONS:

Sensitivity: Electrostatic pickup using rod antennas, one microvolt-per-meter to 2 volts-per-meter. Elect.o-magnetic pickup using shielded loop antennas, 10 microvolts-per-meter to 100 volts-per-meter. As a two-terminal voltmeter, either balanced or unbalanced, one microvolt to one volt.

Effective Random Noise Bandwidth: Varies from approximately 55 cps to 400 cps over the frequency range. Calibration charts give exact figures for each frequency.

Image Rejection: Better than 50 db.

I.F. Rejection: Greater than 60 db.

The equipment is of sturdy drip-proof construction and may be operated for prolonged periods in driving rain or snow with no deleterious effects.



NM-20B (AN/PRM-1A)
150 kc to 25 mc

GENERAL SPECIFICATIONS:

Sensitivity: As a two-terminal voltmeter, either balanced or unbalanced, one μv to one volt. Electrostatic pick-up using rod antenna, 2 μv/meter to 2 volts-per-meter. Electromagnetic pick-up using shielded loop antenna: SMALL LOOP, 10 to 30 μv/meter min. to 10,000 to 30,000 μv/meter max.; LARGE LOOP, 2 to 6 μv/meter min. to 20,000 to 60,000 μv/meter max.

Image Rejection: Better than 50 db.

I.F. Rejection: >45 db.

BFO is provided for C. W. reception.



NM-30A (AN-URM-47)
20 mc to 400 mc

Sensitivity: Radiated pick-up using a calibrated, tuned dipole (without reflector), 0.6 to 60 μv/meter, depending on frequency. Conducted pick-up via 50-ohm matched coaxial line, 0.5 to 1 μv from 20 to 240 mc, less than 6 μv from 240 to 400 mc.

Spurious Response Rejection: Better than 40 db.

I.F. Rejection: >60 db.



NM-50A (AN/URM-17)
375 mc to 1000 mc

Sensitivity: Radiated pick-up using a calibrated, tuned dipole (without reflector) 35 to 160 μv/meter, depending on frequency. Conducted pick-up via 50-ohm matched coaxial line, 2 to 5 μv.

Impulse Bandwidth: Approximately 600 kc over frequency range.

Image Rejection: Better than 40 db.

Spurious Response Rejection: Better than 40 db.

I.F. Rejection: >80 db.

APPROVAL DATA CHART

STODDART & MILITARY TYPE	FREQUENCY	MIL-I-16910A (Ships) Amend. #2	MIL-I-26600* (U.S.A.F.) & MIL-I-6181B	MIL-I-11748B (Sig. C.)	S.A.E.	A.S.A.	C.I.S.P.R.
NM-40A (AN/URM-41)	30cps-15Kc	CLASS '1'	Not Req'd	Not Req'd	Not Req'd	Not Req'd	Not Req'd
NM-10A (AN/URM-6B)	14Kc-250Kc	CLASS '1'	Not Req'd	APPROVED	Not Req'd	C63.2 (Proposed)	Not Req'd
NM-20B (AN/PRM-1A)	150Kc-25Mc	CLASS '1'	CLASS '1' *CATEGORY 'A'		Not Req'd	C63.2 (Proposed)	**
NM-30A (AN/URM-47)	20Mc-400Mc	CLASS '1'	CLASS '1' *CATEGORY 'A'	APPROVED	APPROVED	C63.3 (Proposed)	APPROVED
NM-50A (AN/URM-17)	375Mc-1000Mc	CLASS '1'	CLASS '1' *CATEGORY 'A'	APPROVED	Not Req'd	C63.3 (Proposed)	Not Req'd

** Can be supplied with C.I.S.P.R. Recommended detector time constants.
S.A.E. (Society of Automotive Engineers)
A.S.A. (American Standards Association)
C.I.S.P.R (Comite International Special des Perturbations Radioelectriques) (International Special Committee on Radio Interference)

All items immediately available from stock

STODDART COAXIAL ATTENUATORS AND TERMINATIONS

made with exclusive Stoddart Filmistors for highly accurate and stable resistive values from dc to 3000 mc.



Protected under Stoddart Patents

2, 6 AND 10-POSITION
TURRET ATTENUATORS
WITH SIMPLE
"PULL-TURN-PUSH" OPERATION,
SMALL AND RUGGED

ATTENUATOR PADS

Available in any conceivable combination of male and female Type C and Type N connectors. Maximum length of 3" for any attenuation value.

GENERAL SPECIFICATIONS:
VSWR: <1.2 to 3000 mc for values from 10 to 60 db; as value decreases below 10 db, VSWR increases to not over 1.5.
Characteristic Impedance: 50 ohms.
Attenuation Value: Any value from 0 db to 60 db including fractional values.
Accuracy: ±0.5 db; values above 50 db have rated accuracy of attenuation through 1000 mc only.
Power Rating: 1.0 watt sine wave.

COAXIAL TERMINATIONS
Small-stable-50 or 70 ohms

½-Watt: 50 ohms impedance, TNC or BNC connectors, dc to 1000 mc, VSWR less than 1.2.

1-Watt: 50 ohms impedance, dc to 3000 mc or dc to 7000 mc, Type N or Type C connectors, male or female; VSWR less than 1.2, 70 ohm, Type N, male or female terminations available.

Fast delivery on all items/Send for complete literature

STODDART
AIRCRAFT RADIO CO., INC.

6644 Santa Monica Blvd., Hollywood 38, Calif. HO 4-9292

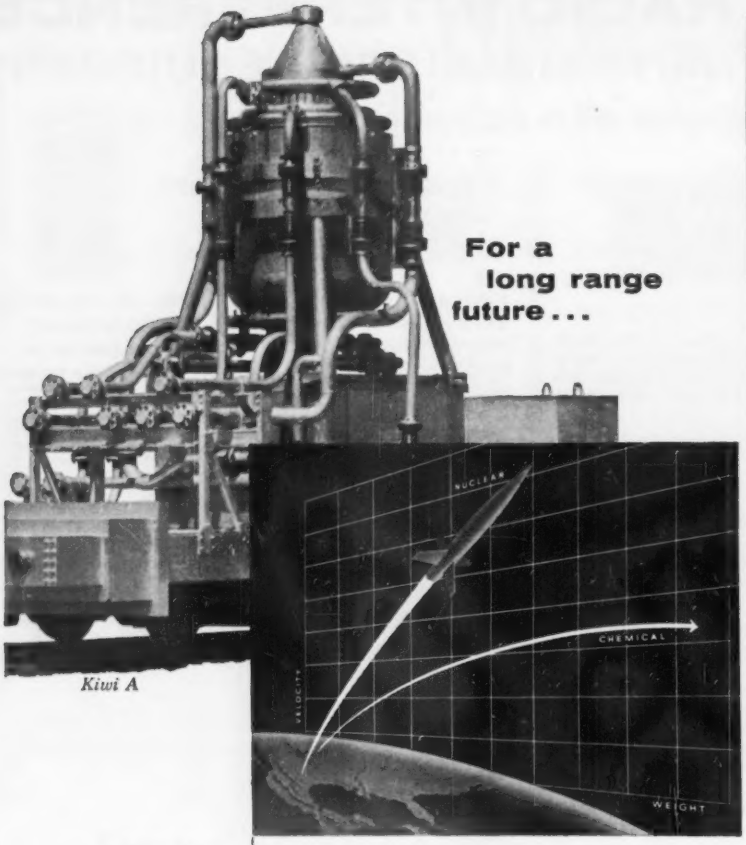

Kiwi A

NUCLEAR ROCKET PROPULSION

One of the most important programs at Los Alamos is Project Rover—research and development work aimed at utilizing nuclear energy for rocket propulsion. Investigations are being made in the fields of heat transfer, neutronics, fluid dynamics and rocket engine controls. Of special interest is the field testing of reactor concepts.

The Laboratory is interested in inquiries from physicists, physical chemists, metallurgists and engineers who wish to engage in any phase of this well-rounded research program.

Write to:

Director of
Personnel
Division 59-83

los alamos
scientific laboratory
OF THE UNIVERSITY OF CALIFORNIA
LOS ALAMOS, NEW MEXICO

single unit. Simple circuit diagrams and complete instructions for interconnection are included in each Handy-Pak of two units.

CIRCLE NO. 398 READER SERVICE CARD



Digital Modules
magnetic type

PACKARD BELL COMPUTER CORP., 1905 S. Armacost Ave., Los Angeles 25, Calif. Magnetic digital modules increase system reliability by reducing number of active circuit elements and permit operation of up to 50 core stages from one drive transistor. System design time can be minimized by core and solid state core driver modules. Modules can be used in digital systems such as computers, automatic control systems, test equipment, telephone circuitry, switching circuitry and shift registers.

CIRCLE NO. 399 READER SERVICE CARD



Tiny Amplifier
4-stage

CENTRALAB, A Division of Globe-Union, Inc., 900 E. Keefe Ave., Milwaukee 1, Wisc. TA-12 4-stage amplifier measures 0.531 in. in diameter and 0.228 in. in height, including the hermetically sealed case; contains 12 resistors, 5 capacitors, and 4 transistors. Gain is 73 to 78 db at 1 kc with 1,000 ohm load; nominal input impedance, 2,000 ohms; signal to noise ratio,

INTERMETALL
SEMICONDUCTORS







INTERMETALL—

semiconductors let you reach the highs in equipment performance and reliability that you expect from first-class silicon and germanium devices.

Here are typical components rated to fit a wide range of your applications:

- **PNP Silicon transistors with 660 mW dissipation at 45°**
- **Silicon Zener and Zener power diodes with a range of 5 to 11 and 5 to 36 volts, respectively**
- **Silicon junction diodes with PIV of up to 350 volts**
- **Silicon rectifiers with max. ratings of: PIV 700 volts, forward current 1,2 A**
- **PNP Germanium AF and RF junction transistors**
- **Hearing aid transistors for standard and miniature aids**

Most types are in stock for quick delivery.

INTERMETALL G.m.b.H.
Flingerstr. 1–3
Düsseldorf, West Germany

DIVISION OF
CLEVITE CORPORATION

CIRCLE NO. 255 READER SERVICE CARD

42 db below 1 v; supply voltage, from a 1.3 v mercury cell; current drain, 2.1 ma maximum.

CIRCLE NO. 400 READER SERVICE CARD

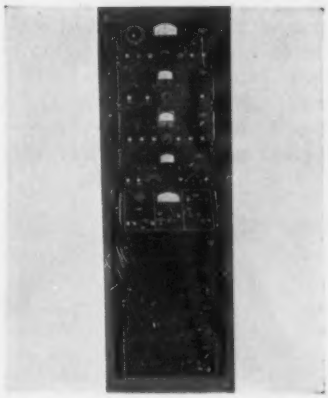

Adapter System for high power ssb

KAHN RESEARCH LABORATORIES, INC., 22 Pine St., Freeport, L. I., N. Y. Model SSB-58-1A adapter system is a practical solution to high power and super power ssb communications. It also permits standard h-f, high level a-m transmitters to be converted to ssb operations without engineering modifications. Principal advantages are: two-to-one or more reduction in equipment costs, greater undesired sideband rejection, lower tube costs, and less sensitivity to overloads and tuning errors. It is specifically tailored for h-f voice, facsimile and multichannel FSK teleprinter operation from 10 kw to 1 megawatt.

CIRCLE NO. 401 READER SERVICE CARD



Voltage Regulator militarized

GENERAL RADIO CO., West Concord, Mass. Type 1570-AS25 militarized line-voltage regulator—designed to meet and exceed military environmental requirements of shock, vi-

Book-of-the-Month
for avid buyers of instruments

if you haven't read this revealing expose!

It tells how buyers of electronic test instruments squander untold time and money purchasing the "traditional" way

If you have anything to do with locating, comparing, evaluating, selecting, specifying, or buying any one of the several thousand electronic test instruments on the market today—you may be in trouble without realizing it. You may be squandering hundreds of precious hours and dollars needlessly.

Send for this timely new booklet published by TECHNICAL INFORMATION SERVICE (TIS). It's worth a fortune. Yet it's *free!* Find out the detailed story about this entirely new concept in instrument research, comparison, and selection—the first centralized source of completely organized instrument information anywhere. See how TIS saves instrument buyers like yourself many precious hours and dollars a year.

Learn about the amazing new TIS *Directory of Technical Specifications*, the only reference encyclopedia on standard instruments available anywhere. Find out how unique TIS *Supplier Research* can pinpoint all possible manufacturers of "custom" or modified instruments for you unbelievably fast. Just fill out the handy coupon below, and mail it today to . . .

ti TECHNICAL INFORMATION CORPORATION
41 Union Square, New York 3, N.Y.
WAtkins 4-2111

Code: 611
Name_____Title_____
Dept._____Company_____
Address_____
City_____Zone_____State_____

CIRCLE NO. 207 READER SERVICE CARD

Headquarters for
HIGH POTENTIAL
Testing

INSULATION BREAKDOWN DIELECTRIC STRENGTH

Every over-potential test need from the generator to the appliance motor . . . is met by a HYPOT®

150 KV Testing
Mobile HYPOT®
Non-destructive testing of power cables, generators, and insulators with AC or DC test potentials to 150 KV. New DC Mobile HYPOT® is easier to handle, cuts costs. Write for bulletin "Mobile HYPOT®"

Model 5500
Typical Mobile HYPOT® provides 0 to 120 kv d-c at 5 ma. More compact and easier to use than equivalent a-c test sets. Lower in cost, too.

30 KV Testing
Bench HYPOT®
Models available with AC or DC test potentials from 5 to 30 KV. Widely used for insulation testing of cables, distribution equipment and heavy duty motors.

10 KV Testing
Portable HYPOT Jr.®
The advanced over-potential tester that enables anyone to make high potential breakdown tests. Separate lights indicate excess leakage current and insulation breakdown. Available with test voltages from 1500 v a-c to 10000 v a-c.



Model 412

INSULATION Materials Tester

Model 4501
Materials Tester

New materials testing AC HYPOT® meets ASTM dielectric strength test requirements. Features automatic rate of test voltage rise, transparent test cage that is safety interlocked and complete line of plug-in materials testing fixtures. Write for new bulletin . . . "HYPOT® Insulation Tester"

VIBROTEST® measures FIVE MILLION Megs

Direct reading a-c operated megohmmeter for resistance measurement to five million megohms. Drift free, stable and accurate on all ranges.

VIBROTEST® Model 2570 has six megohm ranges: 1-50, 10-500, 100-5000, 1,000-50,000, 10,000-500,000 and 100,000-5,000,000 megohms. Write for bulletin.

Write for Bulletins 10-35.16

ASSOCIATED RESEARCH, Incorporated
"Electrical Testing Instruments Since 1926"

3781 W. Belmont Avenue • Chicago 18, Illinois

bration, temperature and humidity —is servo-controlled and gives 3-phase service. All 3 phases are controlled together. Average value of output voltage is held constant regardless of harmonic distortion in power line. It can be used with 50 or 60 cycle lines and is available in 115 v or 230 v models (±10 percent). Maximum kva in wye connection is 8.6.

CIRCLE NO. 402 READER SERVICE CARD

Transducer linear motion

DAYTRONIC CORP., 216 S. Main St., Dayton 2, Ohio. Linear motion measurement or gaging with accuracy to 0.0001 in. in ranges up to 0.120 in. is accomplished using model 102A-120 displacement transmitter which provides an electrical output proportional to displacement of its spring loaded plunger. An inductance device, it has no sliding electrical contacts, maintains calibration indefinitely and is relatively unaffected by mechanical shock, temperature or atmospheric pollution.

CIRCLE NO. 403 READER SERVICE CARD



Wiring System for control panels

WYR-WAY, INC., 250 Mt. Hope Ave., Rochester 3, N. Y. A structural wiring system permits compact mounting of relays and results in

Announcing-

THE NEW SIMPLEX

A 3/16" or larger O.D. Universal Joint featuring:

- **Minimum Static Torque Rating of 250 inch-ounces**
- **Non-magnetic stainless steel forks and bronze ball**
- **New simple 3-part design**
- **Minimum back lash**

Newest addition to the Curtis line is the Simplex, designed to fill the need for a small-size universal joint with a high Static Torque Rating. The Simplex is available in 3/16" and larger outside diameter. Made of non-magnetic material and incorporating a new design inherently strong in torque, the Simplex is particularly well adapted to electronic instrumentation.

SIMPLEX SPECIFICATIONS

Catalog Number	S3	S3B	S7	S7B
Static Torque Rating	250 Inch-Ozs.	250 Inch-Ozs.	200 Inch-Lbs.	200 Inch-Lbs.
O.D.	3/16"	3/16"	7/16"	7/16"
Bore	None	3/32" Dia. 5/16" Deep	None	7/32" Dia. 9/16" Deep
Total Length	1"	1"	2"	2"
Max. Angle of Operation	20°	20°	20°	20°

CURTIS TRADE MARK
UNIVERSAL JOINT CO., INC.
19 Birnie Ave., Springfield, Mass.
As near to you as your telephone

CIRCLE NO. 256 READER SERVICE CARD

the use of considerably smaller panel enclosures. Units are of hinged aluminum modular construction with built-in wiring compartments. Relays are mounted on the top surface and control wires are contained under the devices. Each module swings out so control wires can be snapped into place behind flexible vinyl retaining fingers. Units provide for containing both horizontal and vertical wiring.

CIRCLE NO. 404 READER SERVICE CARD

Power Supply
dual-range

MODEL RECTIFIER CORP., 1675 Utica Ave., Brooklyn 34, N. Y. The DV-III transistor power supply provides these continuously variable outputs: 0-6 v d-c at 1 ampere, or 0-30 v d-c at 2 amperes, or 0-115 v a-c at 1.2 amperes. It features continuously variable autotransformer; 2-section choke input filter; 2-range voltmeter and 2-range ammeter, accurate to 2 percent; 5-way output binding posts; magnetic circuit breaker and range-indicating pilot lights.

CIRCLE NO. 405 READER SERVICE CARD



Pulse Transformer
high-power

STAVID ENGINEERING, INC., Plainfield, N. J. High-power pulse transformer features plug-in magnetron receptacle and pulse cable connection. Transformer compartment in case is completely sealed, with ex-

Package System Teamwork

Micro-Matic

PRECISION WAFERING MACHINES

Models for all jobs requiring very thin slicing of semi-conductor and other difficult-to-cut materials.

Model WMA

Fully automatic, produces wafers consistent in thickness and parallelism to within .0005" total variation.



Optical
ORIENTATION SYSTEM

EFFICIENT. Visual undistorted pattern allows immediate adjustment. Requires no interpretation or correlation with charts and data.

PRACTICAL. Safe and simple to handle. Always ready for immediate use. Compact—takes up only two square feet of table surface.

ECONOMICAL. Low cost, self contained unit. Uses no film or expendable accessories. No maintenance required.

for laboratory or production use

Micromech's experienced Engineering Department is at your service in developing an optical orientation system to meet your particular requirement.

Write for illustrated brochures

MICROMECH MANUFACTURING CORP.

A Division of Sanford Manufacturing Corp.

1020 COMMERCE AVE., UNION, N. J.

CIRCLE NO. 209 READER SERVICE CARD

DID YOU KNOW THAT

PRODUCTS ADVERTISED in electronics BUYERS' GUIDE *are UP-DATED WEEKLY?*

Advertisers in the *electronics* BUYERS' GUIDE use the 52 regular issues of *electronics* magazine to promote new products and keep the industry informed about their latest technical developments. *electronics* advertisers are offered the opportunity to up-date their product advertising by keying it to the catalog-type advertising in the BUYERS' GUIDE.

electronics BUYERS' GUIDE and Reference Issue

A McGraw-Hill Publication
330 West 42nd Street
New York 36, New York

GRC tiny die castings

made in one fast automatic operation ...simple or intricate parts, high in quality, low in cost

Gries' exclusive patented methods make possible wide design latitude . . . assure uniformity, accuracy and smooth surfaces on small parts of all types . . . for a wide variety of uses . . . at substantial savings. GRC die castings leave the machines trimmed, ready-for-use. In addition GRC's unique single cavity die casting techniques offer new shortcuts in assembly . . . new approaches in product design through our exclusive methods.

tiny zinc die castings

No Size Too Small! Maximum sizes up to 1¾", ½ oz.

Write for fact-filled booklet "Small Zinc Alloy Die Castings," includes helpful designer's check list.

GRIES REPRODUCER CORP.

World's Foremost Producer of Small Die Castings

151 Beechwood Ave., New Rochelle, N. Y.

NEw Rochelle 3-8600

CIRCLE NO. 257 READER SERVICE CARD

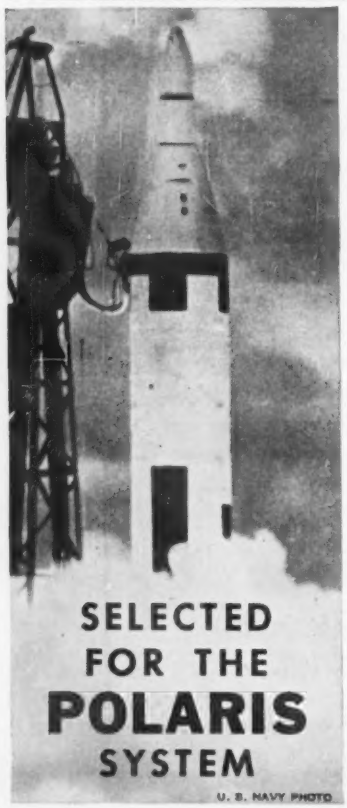

SELECTED FOR THE **POLARIS** SYSTEM

U. S. NAVY PHOTO

MINIATURIZED COOLING UNITS

from American-Standard Industrial Division

Now part of eight missile systems, packaged American Blower Air - Moving Units help prevent breakdowns from self - generated heat in sensitive electronic equipment. Your choice of numerous sizes and designs. All can be modified to solve your particular problems. Or we can design and build units to fit the requirements of your electronic equipment. For individual specification sheets write, detailing your requirements, or send for Bulletin No. 5412. American - Standard* Industrial Division, Detroit 32, Mich. In Canada: American-Standard Products (Canada) Limited, Toronto, Ontario.

* American - Standard and Standard® are trademarks of American Radiator & Standard Sanitary Corp.

American-Standard
INDUSTRIAL DIVISION

AMERICAN BLOWER PRODUCTS • ROSS PRODUCTS • KEWANEE PRODUCTS

ternal expansion bellows and guard. Case contains two trigger windings to actuate external circuits. Power output is 1.3 megawatts at 28 kv; step-up ratio, 1:3.5; primary impedance, 50 ohms; pulse duration, 0.9 μsec; pulse repetition frequency, 1300 pps; filament supply, 3.5 amperes.

CIRCLE NO. 406 READER SERVICE CARD

Epoxy Shells for encapsulation

THOR CERAMICS, INC., 225 Belleville Ave., Bloomfield, N. J. Epoxide resin shells in many shapes for encapsulation of all types of components with liquid epoxy resin. Low water absorption qualities protects enclosed components from water and atmosphere. Shells have a high tensile strength, withstand 150 C. At 60 cycles, dielectric constant is 3.70, loss factor is 0.009.

CIRCLE NO. 407 READER SERVICE CARD

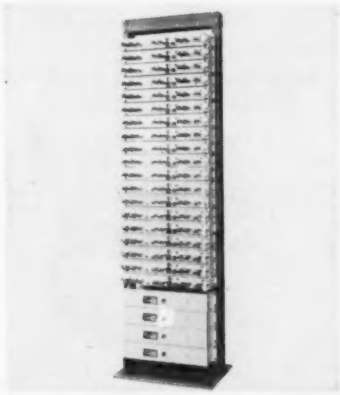

F-M Carrier System 24-channel

RAYTHEON CO., 103 River St., Waltham 54, Mass. B-640 multiplex carrier features transmitter crystal-control, miniaturized plug-in assembly and compatibility with telephone transmission standards.

IF YOU USE BWOs & TWTs



you need the NEW PRD 813

There is a "spanking" new BWO/TWT power supply that's really a work horse. PRD's latest contribution to the test equipment art, the Type 813 can supply just the right kind of power for driving a host of microwave tubes ranging from voltage-tuned magnetrons to travelling-wave amplifiers.

Featuring the latest advances, the PRD Type 813 has built-in time delays for filament and grid, delay line and collector, and anode voltages... and includes other frustration inhibitors, such as:

1. Individual adjustments of delay line, collector, anode, grid, and heater elements
2. Provisions for **both** internal and external sweep and amplitude modulation
3. AGC at the grid when used with external detectors
4. Digital read-out for delay line supply.

In addition to these features are the (typical of all PRD equipment) bedrock stability and high sensitivity of the first truly UNIVERSAL BWO/TWT Supply.

The remainder of the features and full specs for the PRD Type 813 can be yours by writing to: PRD—*first in microwaves.*

POLYTECHNIC RESEARCH & DEVELOPMENT CO., INC.
Factory & General Office:
202 Tillary St., Brooklyn 1, N. Y.
ULster 2-6800

Western Sales Office:
639 So. La Cienega Blvd., Los Angeles 34, Calif.
TExas 0-1940

CIRCLE NO. 258 READER SERVICE CARD

It provides voice channels over f-m subcarriers in the 40 to 420 kc base band. Carrier equipment may be separated from associated r-f equipment by several miles of wire line or cable. System design includes optional transistorized repeaters.

CIRCLE NO. 408 READER SERVICE CARD



Mechanical Counter high precision

CHICAGO DYNAMIC INDUSTRIES, INC., 1725 Diversey Parkway, Chicago 14, Ill. Series 2500 mechanical counter is designed for indicating temperatures, pressures, positions, distances and time for ground support equipment, telemetering, fire control and other computers. Counter has operating speeds up to 1,350 rpm; operating temperature range, − 65 F to + 160 F; starting torque from 0.5 oz in. over full operational range. Unit withstands vibration along each principal axis through a total excursion of 0.06 in. for 1 hr at 10 to 55 cps.

CIRCLE NO. 409 READER SERVICE CARD

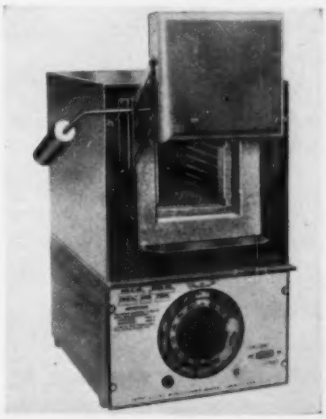

Automatic Furnace utility size

THERMO ELECTRIC MFG. CO., Dubuque, Iowa. Type 200 Thermolyne electric laboratory furnace fea-

IN LESS THAN 4 SECONDS

FROM THIS
TO THIS
OR THIS

WITH THE REVOLUTIONARY PRODUCTION AID TOOL!

"PIG-TAILOR"®

Foot operated
No accessories
3 minute set up

$125.00

"PIG-TAILORING"

a revolutionary new mechanical process for higher production at lower costs. Fastest PREPARATION and ASSEMBLY of Resistors, Capacitors, Diodes and all other axial lead components for TERMINAL BOARDS, PRINTED CIRCUITS and MINIATURIZED ASSEMBLIES.

PIG-TAILORING eliminates: • Diagonal cutters • Long nose pliers • Operator judgment • 90% operator training time • Broken components • Broken leads • Short circuits from clippings • 65% chassis handling • Excessive lead tautness • Haphazard assembly methods.

PIG-TAILORING provides: • Uniform component position • Uniform marking exposure • Miniaturization spacing control • "S" leads for terminals • "U" leads for printed circuits • Individual cut and bend lengths • Better time/rate analysis • Closer cost control • Invaluable labor saving • Immediate cost recovery.

Pays for itself in 2 weeks

"SPIN-PIN"®

Close-up views of "SPIN-PIN" illustrate fast assembly of tailored-lead wire to terminal.

- No Training
- No Pliers
- No Clippings
- Uniform Crimps
- 22 Sizes

PAYS FOR ITSELF THE FIRST DAY!

$5.00 EACH

Write for illustrated book to Dept 9EP

BRUNO-NEW YORK INDUSTRIES CORP.
DESIGNERS & MANUFACTURERS OF ELECTRONIC EQUIPMENT
440 WEST 34th STREET • NEW YORK 1, N. Y.

CIRCLE NO. 211 READER SERVICE CARD

If you produce

FERRITES
ELECTRONIC CORES
MAGNETIC RECORDING MEDIA

. . . then let WILLIAMS help by supplying you with latest, authoritative technical data on

PURE FERRIC OXIDES

MAGNETIC IRON OXIDES

MAGNETIC IRON POWDERS

Since final quality of your production of ferrites, electronic cores, and magnetic recording media depends on proper use of 3 specialized groups of magnetic materials . . . you'll find it mighty helpful to have all the latest, authoritative technical data describing the physical and chemical characteristics of each. This information is available to you just for the asking. So send today. Meanwhile, here are highlights of each product group.

Pure Ferric Oxides: For the production of ferrite bodies, we manufacture a complete range of high purity ferric oxide powders. These are available in both the spheroidal and acicular shapes, with average particle diameters from 0.2 to 0.8 microns. Impurities such as soluble salts, silica, alumina and calcium are at a minimum.

Magnetic Iron Oxides: For magnetic recording—audio, video, instrumentation etc.—we produce a group of special magnetic oxides with a range of controlled magnetic properties. Both the black ferroso-ferric and brown gamma ferric oxides are available.

Magnetic Iron Powders: For the fabrication of magnetic cores in high-frequency, tele-communication, and other magnetic applications, we make a series of high purity iron powders.

These materials are products of Williams research facilities. For your convenience, we maintain fully equipped laboratories for the development of new and better inorganic materials. We also investigate new fields of application. Please write, stating your problem. We'll be glad to cooperate. Address Dept. 25, C. K. Williams & Co., 640 N. 13th St., Easton, Pa.

WILLIAMS
COLORS & PIGMENTS
C. K. WILLIAMS & CO.
East St. Louis, Ill.
Easton, Penna. • Emeryville, Calif.

tures a fully automatic electronic controller, spotlight temperature readings, long life heating elements, safety door that swings out and up (keeping the hot side away from the operator), and durable construction.

CIRCLE NO. 410 READER SERVICE CARD

Pulse Transformer high temperature

STAVID ENGINEERING, INC., Plainfield, N. J. High power pulse transformer is designed for ambient of 85 C, will withstand 135 C operating temperature and 150 C nonoperating. Unit uses high-temperature insulated wire, Teflon pads between windings, silicone oil vacuum-impregnation, gaskets and seals of silicone rubber or Teflon, recessed expansion bellows, and a small, lightweight package.

CIRCLE NO. 411 READER SERVICE CARD

Miniature Fan quick-mounting

ROTRON MFG. CO., Woodstock, N. Y. Designed for tightly packaged airborne black boxes where size and weight must be held to a minimum, where reliability is critical and where high heat loads must be dissipated with cooling air, the Aximax 1 is 1½ in. in diameter by 1½

Expanding the Frontiers of Space Technology in

MANUFACTURING ENGINEERING

■ Lockheed Missiles and Space Division maintains complete manufacturing laboratories for research in chemistry, metallurgy, plastics, and electronics. Engineering, design, fabrication, and installation services are performed in such areas as magnetics, hydraulics, optics, electronics, pneumatics, and mechanics.

Manufacturing production techniques, such as ultrasonic drilling of microscopic holes in extremely hard and dense materials, are developed by the laboratories. Electronics and solid state research makes possible smaller, lighter, and increasingly reliable components and systems for accurate guidance, sensing and communication at extremes of temperature, vibration and acceleration.

ENGINEERS AND SCIENTISTS

The advanced nature of Lockheed Missiles and Space Division's programs provides an unusual opportunity for qualified professional men. If you are experienced in work related to the above areas, you are invited to share in the future of a company that has a history of continual progress. Write: Research and Development Staff, Dept. I-2-22, 962 W. El Camino Real, Sunnyvale, California. U.S. citizenship required.

Lockheed
MISSILES AND SPACE DIVISION

Systems Manager for the Navy POLARIS FBM; DISCOVERER, SENTRY and MIDAS; Army KINGFISHER; Air Force Q-5 and X-7

SUNNYVALE, PALO ALTO, VAN NUYS, SANTA CRUZ, SANTA MARIA, CALIFORNIA
CAPE CANAVERAL, FLORIDA
ALAMOGORDO, NEW MEXICO • HAWAII

new GEN-PRO®

SOLID-BLOCK TERMINAL BOARDS

SOLID BACKS save cost of insulating strip, resist moisture and breakage.

"MOLDED-IN" CONDUCTORS assure greater capacity, can't work loose; eliminate separate saddle plates.

THICKER, HIGHER BARRIERS afford greater insulation, reduce breakage, increase creepage by 12%. Gen-Pro boards have greater amperage capacity, are mechanically and electrically interchangeable with other boards. Also available with molding compound PER MIL-14E. Competitively priced. Immediate delivery.

Series 440 Illustrated

WRITE TODAY for bulletin illustrating types in stock with specifications and list of lugs available.

GENERAL PRODUCTS CORPORATION
Over 25 Years of Quality Molding
UNION SPRINGS, NEW YORK TWX No. 169

CIRCLE NO. 260 READER SERVICE CARD

From PITLOG –

STALO STABILITY TESTER

Accurate to 1 part in 10^9

Measures short term deviation and long term drift from UHF to 10,000 mc. Checks stability of radar systems components – stalos, cohos, IF's, klystrons and other stable signal sources – either on production line or in the field. Particularly useful in design, test and maintenance of MTI radars.

A VERSATILE MICROWAVE STABILITY TESTER... DESIGNED FOR ANY APPLICATION REQUIRING PRECISE MEASUREMENT OF FREQUENCY STABILITY.

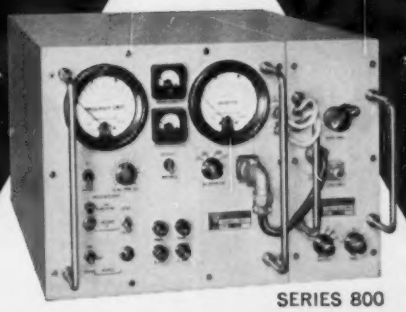

SERIES 800

Other **PITLOG** components –
Tunable Stalos – stable local oscillators covering UHF, L, S, C, or X Band frequencies.

PITOMETER LOG CORP.
237 Lafayette Street New York 12, N. Y. CAnal 6-7250
Advanced Instrumentation Since 1927

Write for Bulletin E-9

Reduce rejects and operational failures caused by airborne dirt, dust, lint, abrasives with the

HONEYWELL ELECTRONIC AIR CLEANER

When microscopic airborne dirt, dust, lint and abrasives get into precision electric and electronic devices, the results are unusually high reject rates, poor product quality, operational failures. The Honeywell Electronic Air Cleaner will protect your precision components from the damaging action of these airborne spoilers by trapping particles 100 times as small as those stopped by mechanical filters.

Pays for itself! Send coupon today to learn how the Honeywell Electronic Air Cleaner soon pays for itself in:

- **Electronic Manufacturing**
- **Controlled environment rooms for precision manufacturing, processing and assembly**
- **Switch & relay rooms**
- **Computer rooms**
- **Transmitter rooms**
- **Precision component manufacturing**

MINNEAPOLIS-HONEYWELL
DEPT. EL-9-45 Minneapolis 8, Minn.
Please send free copy of Electronic Air Cleaner booklet, "A Close Look at Air-Borne Dirt." We have the following problems:_____

*Name*_____
*Company*_____
*Address*_____
*City*_____ *Zone*____ *State*_____

SILVER PAINT AND SILVER PASTE

Take the "bugs" out of the application of conductive silver coatings. Use Drakenfeld silver paint and silver paste tailored to meet your needs. We formulate special compositions for glass and ceramic bodies and other materials. Let us know your specific requirements. Samples will be supplied to fit them. Your inquiry will receive prompt attention.

B. F. DRAKENFELD & CO., INC.
Box 519, Washington, Pennsylvania

Drakenfeld

YOUR PARTNER IN SOLVING CONDUCTIVE COATING PROBLEMS

CIRCLE NO. 262 READER SERVICE CARD

ENJOY the CONVENIENCE of these EASILY MOUNTED CABINET/CONSOLE ACCESSORIES

- Mount at any desired height on standard-tapped front mounting rail
- Standard units 21⅞" wide—available in 2-, 3- or more section widths with continuous surface

SLOPE FRONT CONSOLE FRONT with WRITING SURFACE

CONVERTS RACK CABINET INTO CONSOLE

Mounts on our standard relay rack cabinets. Slope front heights: 12¼", 14", 17½"—angled 15° from vertical. Writing surface depths: 12¼", 14", 17½".

3½" FLAT CONSOLE WRITING SURFACE

SOLID... CONSERVES PANEL SPACE

For Console or Cabinet—requires only 3½" of valuable panel space. Depth: 15¾" or 18¾".

- Flush-mounted writing surface in choice of aluminum, Formica, steel • Standard construction spot-welded steel—aluminum available • Gray hammertone baked enamel standard finish—MIL available.

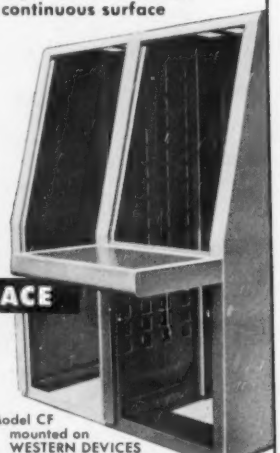

Model CF mounted on WESTERN DEVICES VENTILATED CONSOLE

Write for complete data ORegon 8-7827

WESTERN DEVICES, INC.
600 W. FLORENCE AVE., INGLEWOOD, CALIF.

ONE SOURCE... for VENTILATED RELAY RACK CABINETS, CONTROL CONSOLES, BLOWERS, CHASSIS, 'CHASSIS-TRAK'®, RELATED COMPONENTS

in. in length and weighs 4 oz. The constant 22,500 rpm design will deliver 23 cfm free delivery or 19 cfm at 1 in. static pressure. Available motor designs include 115 or 200 v a-c, 1 phase or 3 phase, 400 cps for either pressurized or non-pressurized applications and for sine or square wave.

CIRCLE NO. 412 READER SERVICE CARD



Rotary Wire Stripper no nicking

CARPENTER MFG. CO., INC., Highbridge Road, DeWitt 14, N. Y. Model 78 swingblade rotary wire stripper is designed for production twist-stripping of Teflon, nylon, PVC and all similar insulations from solid, stranded and shielded wire, cable or coax up to ⅛ in. diameter over the insulation. Inserting the wire opens the blade. Withdrawal automatically closes the blade, simultaneously twist-stripping the slug off the end of the lead with a wringing action that leaves a stranded conductor tightly twisted for further handling.

CIRCLE NO. 413 READER SERVICE CARD



Servo Analyzer versatile unit

AETNA ELECTRONICS CORP., Readington Rd., North Branch, N. J. Servo analyzer features a mechanical integrator which allows wide frequency coverage. Frequencies are indicated on a 4-in. dial. A special circuit design for generating

Remarkably Versatile!

CURTISS-WRIGHT

TRANSISTOR CURVE TRACER

Model TCT-2
$195.00
f.o.b. Albuquerque, N.M.

From the experience gained in designing and building custom test equipment comes this standard curve tracing unit. The TCT-2 permits displays of the V_c-I_c family of curves and features:

- Five curve presentation
- Single curve analysis
- Usability with any DC scope
- Choice of calibrated input steps
- V_{EB} may be measured externally
- Calibrated axes

This standard model is versatile in application too. It may be used for circuit development or reliability studies in the laboratory—inspection or trouble-shooting on the production line. For special requirements—power transistor test systems, for example—Curtiss-Wright will custom-design equipment to fit your needs. For more complete information on the curve tracer—or other types of transistor test equipment, write us.

INTER MOUNTAIN INSTRUMENTS BRANCH
ELECTRONICS DIVISION
CURTISS-WRIGHT
CORPORATION
P.O. BOX 8324, ALBUQUERQUE, N.M.

CIRCLE NO. 263 READER SERVICE CARD

square waves provides transient-free wave forms even at lowest frequencies. A 100 to 1 attenuator is provided. Analyzer will accept carrier frequencies from 5 to 5,000 cps and has an internal carrier source of 5,000 cps. Unit is particularly useful for testing servo, missile, geophysical and medical equipment.

CIRCLE NO. 414 READER SERVICE CARD

Video Detector Mount
lightweight unit

AMERICAN ELECTRONIC LABORATORIES, INC., 116 N. Seventh St., Philadelphia 6, Pa. An all-aluminum broadband coaxial crystal video detector mount weighs less than 1.2 oz. Recommended for aircraft applications, the mount is made with a choice of type N or TNC male input connectors and either TNC or miniature female video connectors. Mount covers the band from 1 to 11 kmc with tangential sensitivities better than −50 dbm over the entire band, measured with a 2 mc video bandwidth using an MA408B crystal.

CIRCLE NO. 415 READER SERVICE CARD

Delay Network
for analog computers

ESC CORP., 534 Bergen Blvd., Palisades Park, N. J. Analog computer delay network has a delay time of 700 μsec ± 7 μsec, tapped at 70 μsec

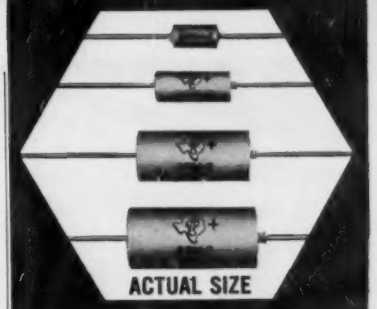

NEW

TI HIGH-RELIABILITY TANTALUM CAPACITOR SERIES FROM

Lafayette Radio

YOUR AUTHORIZED TI DISTRIBUTOR

125°C operation
standard ±10% tolerance

SRM capacitors meeting the most exacting reliability standards are now yours through advanced TI processing techniques and 100% testing of pre-aged units.

134 ratings from 1-330 μf, 6-35 v. Exceeding all existing MIL specs over a full range of industry-standard ratings and case sizes, the subminiature SRM series features . . . new low dc leakage limits and long operating and storage life . . . standard ±10% tolerance . . . operation from −80°C to +125°C . . . ruggedized construction . . . reverse voltage capabilities . . . nominal voltage derating required at 125°C.

For your highest reliability requirements, specify *Texas Instruments* premium performance solid tantalum capacitors.

TI semiconductors and components are available off-the-shelf at factory prices in the following quantities:
1-999
silicon transistors germanium transistors silicon diodes and rectifiers carbon film resistors. sensistor silicon resistors: 1-499
tan-TI-cap tantalum capacitors: 1-99.

Lafayette Radio

Department TI-D
BOSTON 10, Mass.
110 Federal St.
HU 2-7850
JAMAICA 33, N.Y.
165-08 Liberty Ave.
AX 1-7000
PLAINFIELD, New Jersey
139 W. 2nd St.
PL 6-4718
NEWARK 2, New Jersey
24 Central Ave.
MA 2-1661
NEW YORK 13, N.Y.
100 6th Ave.
WO 6-5300

for
100,000 CYCLES
and
800,000 BREAKS

NEW
miniaturized
solenoid actuated
CAM SWITCH

- ✓ Hermetically sealed
- ✓ Extremely compact, light weight
- ✓ "Reliability engineered" for guaranteed performance
- ✓ Shock & vibration tested in conformance with MIL-E-5272A
- ✓ Operates 24 to 30 volts, DC, at 125°C ambient
- ✓ Rating, 1 amp.
- ✓ Size, 1¾" x 1 21/32" x 2¾"
- ✓ 7-pole, 18-position shorting with interrupter and homing

Designed to meet standards for guided missile systems, this new Cam Switch is typical of special designs by Tech Labs which can be easily adapted to specific needs. Write for complete data.

TECH LABORATORIES, INC. — PALISADES PARK, NEW JERSEY

intervals ± 1 percent; characteristic impedance, 3,000 ohms ± 5 percent; delay linearity, ± 1.0 percent, 300 cps to 25 kc; ripple, ± 1.0 percent; insertion loss, 1.0 db maximum; frequency response, ± 1.0 db, 300 cps to 10 kc; dimensions, 9 in. by 5⅜ in. by 4¾ in.

CIRCLE NO. 416 READER SERVICE CARD

Parametric Amplifier
pretuned unit

TAPETONE, INC., Webster, Mass. Parametric amplifier cavity series HPA operates at fixed frequencies at 400-500 mc. Bandwidth is about 1 percent; gain, approximately 15 db with proper pump amplitude and frequency; permits 3-10 db improvement in most receiving systems in this frequency range.

CIRCLE NO. 417 READER SERVICE CARD

Electronic Timers
two types

WEBSTER ELECTRIC CO., Racine, Wisc. Types T-1 and T-3 electronic timers were designed for on-off timing in life tests of products, proportioning controls, and repeat timing of a variety of processes and machines. They are for continuous

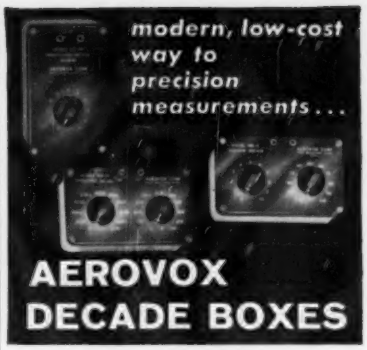

AEROVOX
DECADE BOXES

Inductance, Resistance and Capacitance Decades in extra-compact and rugged design for accurate and dependable performance. Quality components used throughout to provide the same precise quality standards, electrically and mechanically, as finest lab-type equipment.

Units housed in heavy-duty, seamless steel cases with durable gray finish. All one size—5⅛"L x 3⅛"W x 2 13/16"H. Black face plates with white markings. Highest value multiplier on left.

Available from all Aerovox Parts Distributors, write for descriptive literature...

AEROVOX CORPORATION
DISTRIBUTOR DIVISION
New Bedford Massachusetts

CIRCLE NO. 264 READER SERVICE CARD

No quicker, more accurate way to get information on PRODUCTS and SERVICES than . . . .

electronics
BUYERS'
GUIDE

keep it
at your
fingertips!

ABC ABP
electronics
BUYERS' GUIDE
A McGRAW-HILL PUBLICATION
330 WEST 42nd ST. NEW YORK 36, N. Y.

cycle operations which are turned on or off for a given period, with the cycle continuous until the initiating switch is opened. The T-1 has a single relay and one time control knob; the T-3, two relays and two knobs.

CIRCLE NO. 418 READER SERVICE CARD

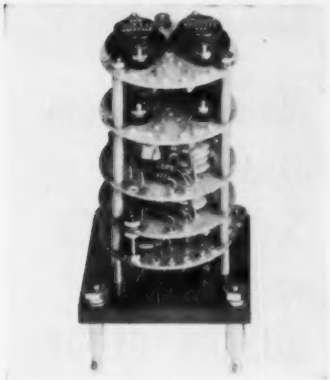

High Speed Relay
semiconductor type

RIXON ELECTRONICS, INC., 2414 Reedie Drive, Silver Spring, Md. Semiconductor relay with keying speed up to 2,000 band (bits/sec) for telegraphic or teletypewriter applications will accept either polar or neutral inputs. It has all electronic parts, can operate at high speeds without mechanical delay or failure. It operates as a spst relay with input coil and output contact isolation.

CIRCLE NO. 419 READER SERVICE CARD

Double-Ended Relay
4pdt

HI-G INC., Bradley Field, Windsor Locks, Conn. The HG4DM relay, approximately ⅜ in. diameter, may be used as an in-cable assembly, with the coil leads being connected

PHAZOR
PAT. PEND
PHASE METER

MODEL 200AB

PRICE $419.00

- 2° absolute accuracy
- Readings not affected by noise and harmonics
- Frequency range 15 CPS — 30KC
- Accuracy to .01 degree with simple circuit techniques
- High sensitivity on input & reference channels
- Can measure in-phase & quadrature voltage component

For further information contact your nearest representative or write for brochure

ITECO
INDUSTRIAL TEST EQUIPMENT CO.
55 E. 11th ST. · NEW YORK 3 · GR. 3-4684

CIRCLE NO. 266 READER SERVICE CARD

PERMANENT MARKING

TRI MARK will permanently mark ANY surface—rough or polished—metal or textile—hot or cold. Temperature range —° F. to 300-400° F. Resists dyes, most acids, alkalis, oils, and weather. Successfully used in every industry under all conditions. Write on a company letterhead for FREE sample (state color) and complete information, colors available and price list.

TRI MARK—the Ball Point Tube of color for Better, Faster, and more Economical Marking on ANY surface.

EXCLUSIVE
STAINLESS HARDENED
HEAT-TREATED
STEEL TIP

TRI CHEM
TRI-CHEM, INC.
DEPT. EL. WEST ORANGE, N. J.

CIRCLE NO. 217 READER SERVICE CARD



SEE answers to noise & vibration analysis problems quickly, accurately with..

PANORAMIC'S sonic spectrum LP-1a analyzer



Rugged . . Reliable . . Economical

A basic component for waveform study and frequency response curve tracing, the LP-1a is widely used for:

- Vibration and noise measurements
- Harmonic and IM analysis
- Acoustic waveform studies
- Medical electronics

Check these LP-1a features:

- "Quick-look" log sweep; 40 cps to 20,000 cps in 1 second.
- Adjustable linear frequency analysis for 20 cps to 22,500 cps.
- Automatic optimized resolution with variable IF bandwidth options.
- Residual spurious down more than 60 db.
- Optional "M" internal markers at 60 cps, 500 cps and 5 kc (and harmonics).
- Optional "Z" flat face CRT, edge-lit reticule and camera mount bezel.

Panoramic
RADIO PRODUCTS, INC.

Ask for new Catalog Digest and the Panoramic Analyzer
530 South Fulton Ave., Mount Vernon, N.Y.
Phone: OWen 9-4600
Cables: Panoramic, Mt. Vernon, N. Y. State

both ends internally. It uses two parallel, magnetically isolated structures and one common coil. The two armatures are of the balanced rotary type, making the relay suitable for use under vibration of 20 g to 2,000 cps. Contacts are rated at 2 amperes resistive at 28 v d-c or 115 v a-c for a life of 100,000 cycles.

CIRCLE NO. 420 READER SERVICE CARD



Time Delay Relays for military uses

THE A. W. HAYDON CO., Waterbury, Conn. Special digital time delay relays for military applications where adjustable, accurate and legible time delay settings are required. Housing is 2¼ in. round, extending less than 4½ in. behind panel mounting flange with only setting knob exposed. Delays of $\frac{1}{10}$ sec to 30 sec, in $\frac{1}{10}$ sec increments, are set by rotating full diameter knob containing setting and switching mechanism.

CIRCLE NO. 421 READER SERVICE CARD



Servo Amplifier transistorized

AVION DIVISION, ACF Industries, Inc., 11 Park Place, Paramus, N. J. Model 412 series subminiature transistorized, sealed, self-contained low-power servo amplifier. It will drive a 3.5-w servomotor, such as the 40-v, center-tapped, size

DO YOU KNOW?

You Can Locate Nearest SALES OFFICES in this year's BUYERS' GUIDE

A one-step method for locating the nearest sales office of every manufacturer listed in the GUIDE. The nearest sales offices to you (with addresses and phone numbers) are listed directly after manufacturers' names in the Manufacturers' Index.

One more reason why advertisers and users of the BUYERS' GUIDE receive extra benefits available in no other place.

electronics BUYERS' GUIDE and Reference Issue

A McGraw-Hill Publication
330 West 42nd St.
N. Y. 36, N. Y.

ABC
ABP

AC/DC RATIO STANDARD

For those who require an AC/DC RATIO STANDARD in a single package, Gertsch offers its Models 1001 and 1002. Like all GERTSCH RATIO STANDARDS (1000 Series), these units feature: heavy duty instrument switches, transient suppression, AC Ratios up to 1.11111, bold in-line readout and extra-heavy mechanical construction to insure TRUE STANDARDS PERFORMANCE.

	AC	DC
Linearity:	1 part per million (0.0001%)	10 parts per million (0.001%)
Resolution:	6 Place (0.0001%)	6 Place (0.0001%)

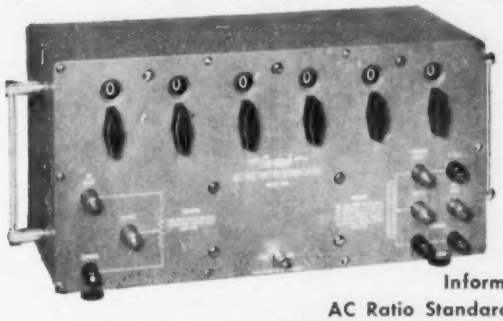

Information on AC Ratio Standards in the GERTSCH RATIO STANDARDS SERIES, Models 1000, 1003 and 1004, is also available.

GERTSCH PRODUCTS, Inc.

3211 South La Cienega Boulevard, Los Angeles 16, California
UPton 0-2761 - VErmont 9-2201

Gertsch

CIRCLE NO. 268 READER SERVICE CARD

CONSIDER THE **MAGIC** OF

CAST Teflon* FILM

THE DIELECTRIC OF THE FUTURE!

*Trademark DuPont TEFLON tetrafluoroethylene resin

UNLIMITED VERSATILITY

plus . . .

- High Dielectric Strength
- Zero Void Content
- Complete Freedom From Stresses
- Uniform Physical Dimensions
- Chemical Inertness
- High Heat Resistance

JUST DEVELOPED . . . UNIQUE METALLIZED TEFLON FILM

THICKNESSES
0.004" (TOL ± 0.0003)
0.00025" (TOL ± 0.00005)

FOR EXACTING SPECIAL REQUIREMENTS CONTACT
Research And Development Department

NEW FULL DETAIL CATALOGUE AVAILABLE
WRITE ON YOUR PROFESSIONAL LETTERHEAD

DILECTRIX CORPORATION

Allen Blvd. & Grand Ave. • Farmingdale, L. I., N. Y.

PIONEERS IN THE DEVELOPMENT OF CAST TEFLON FILM

CIRCLE NO. 269 READER SERVICE CARD

Malco IS YOUR BEST SOURCE

FOR

SOLDERING LUGS
TERMINALS
PRINTED CIRCUIT
HARDWARE

HERE'S WHY:

- Specialized high production techniques afford lowest possible unit cost.
- Precision tooling, rigid quality control assure tolerances to critical specifications.
- Ample stocks of over 1000 different parts permit prompt delivery.
- Malco specializes in a complete line of small stampings for Radio-TV, electrical/electronic and automotive industries.
- Our line includes terminals and printed circuit hardware in loose or in chain form for automatic insertion.

Let Malco show you how you can save on production time and costs. Contact us today.

REQUEST BULLETIN 552

Malco MANUFACTURING COMPANY

4023 W. LAKE ST. • CHICAGO 24, ILL.

CIRCLE NO. 219 READER SERVICE CARD

★ ULTRA LOW capacitance & attenuation

TYPE	μμf/ft	IMPED.Ω	O.D.
C 1	7.3	150	.36"
C 11	6.3	173	.36"
C 2	6.3	171	.44"
C 22	5.5	184	.44"
C 3	5.4	197	.64"
C 33	4.8	220	.64"
C 4	4.6	229	1.03"
C 44	4.1	252	1.03"

WE ARE SPECIALLY ORGANIZED TO HANDLE DIRECT ORDERS OR ENQUIRIES FROM OVERSEAS
SPOT DELIVERIES FOR U.S.
BILLED IN DOLLARS—SETTLEMENT BY YOUR CHECK
CABLE OR AIRMAIL TODAY

TRANS T RADIO

NEW 'MX and SM' SUBMINIATURE CONNECTORS Constant 50Ω 63Ω 70Ω impedances

TRANSRADIO LTD. 138A Cromwell Rd. London SW7 ENGLAND CABLES: TRANSRAD, LONDON

CIRCLE NO. 270 READER SERVICE CARD

PLATING *of electronic components*

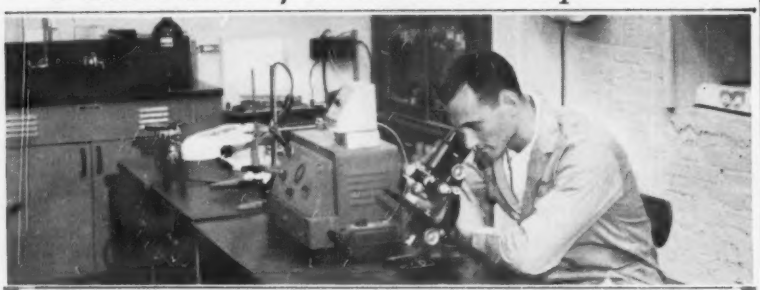

Diodes... Transistors... Rectifiers... Capacitors

Know how...our present customers include many leading manufacturers of electronic components, several of whom use us as a secondary plating source.

Our modern equipment insures tight conformity to specifications...volume production...quality control.

Manufacturers of transistors, diodes, rectifiers and capacitors have found our Research & Development Unit familiar with today's precious metal plating difficulties. **30,000 sq. ft.** devoted to electronic plating and research.

Send for our electronic plating brochure...or have our representative call.

GOLD · SILVER · RHODIUM · PLATINUM · PALLADIUM · NICKEL

Specialists in Metal Plating since 1936

SPECTRONIC PLATING CO., INC.
A Division of Spectranome Plating Co., Inc.
330 W. 13th STREET · NEW YORK 14, N.Y. · AL 5-8677

10 and 11 servomotors from low-level a-c signals. Gain is 2,500 ±5 percent with 10-v output; excitation, 28-v d-c; size, 1 cu in.; temperature range, −55 C to +100 C.

CIRCLE NO. 422 READER SERVICE CARD

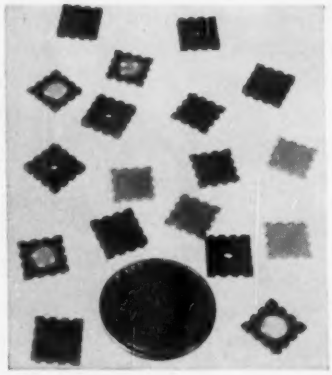

Tiny Wafers high-temperature

CORNING GLASS WORKS, Corning, N. Y. Wafers of Fotoceram, a rugged, high-temperature glass-ceramic, enable production of micro-module circuit assemblies. The wafers serve as resistor, transistor, capacitor and diode bases.

CIRCLE NO. 423 READER SERVICE CARD

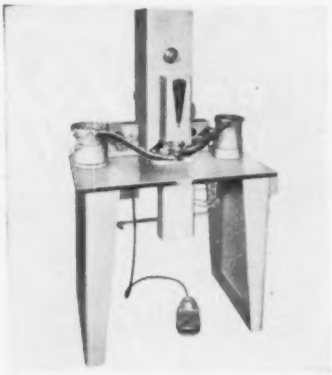

Inserting Machine for small parts

HILL MACHINE CO., 1301 Eddy Ave., Rockford, Ill. Sertomat automatic machine feeds and inserts a wide variety of small parts such as the newly-developed two-piece Teflon bushing and feed-through type circuit board terminals. Parts fed from two hoppers through chutes are pressed into place by cam-oper-

No quicker, more accurate way to get information on PRODUCTS and SERVICES than . . . .

electronics
BUYERS' GUIDE

keep it
at your
fingertips!

ABC ABP
electronics
BUYERS' GUIDE
A McGRAW-HILL PUBLICATION
330 WEST 42nd ST. NEW YORK 36, N. Y.

MEET TOM EMMA

Associate Editor, **electronics**
FINANCE EXPERT

Thomas Emma, BA, Columbia, is a U.S. Naval Reserve officer who was formerly a technical writer with IT&T. Tom prepares "Financial Roundup"—a regular weekly business feature. In the coming months Tom will be concerned with radio communications, but he will be specifically involved with spectrum useage problems. To keep abreast of finance in electronics, turn to Tom's weekly coverage of latest developments. To subscribe or renew your subscription, fill in box on Reader Service Card. Easy to use. Postage free.

ABC **electronics** ABP
A McGraw-Hill Publication
West 42nd Street, New York 36, N. Y.

ated ram adjustable for pressing force, speed, and stroke. A lower unit has retracting pin to facilitate accurate positioning of small parts. Insertion of 3,000 pieces per hr is feasible.

CIRCLE NO. 424 READER SERVICE CARD

Servo Plotter
5 ft high, 2 ft sq

REPUBLIC AVIATION CORP., Farmingdale, L. I., N. Y. Plotter automatically checks out servo systems and reproduces test results in graphic form. It produces a selection of 40-point curves within 12 minutes from beginning of test. It detects and plots phase and amplitude relationships in the data-frequency range from 0.3 to 30 cycles. Harmonic distortions are compensated for automatically.

CIRCLE NO. 425 READER SERVICE CARD



P-C Trimmer Pot
½ in. in diameter

MAUREY INSTRUMENT CORP., 7924 S. Exchange Ave., Chicago 17, Ill. The 50-M7 miniature trimmer pot. One terminal is polarized for quick assembly, needs no shaft-locking device, available from 25 to 10,000 ohms, sealed construction. Pots are built to applicable requirements of MIL-R-19A, MIL-E-5272A, MIL-R-19518, MIL-R-12934B, NAS 710.

CIRCLE NO. 426 READER SERVICE CARD

DO YOU KNOW?

More Detailed
PRODUCT BREAKDOWNS
Are contained
in the 1959-1960
BUYERS' GUIDE

More than 2,500 verified product categories; approximately 4,000 manufacturers of electronics and allied products compiled from scratch for this issue . . .

One more reason why advertisers and users of the BUYERS' GUIDE receive extra benefits available in no other place.

electronics
BUYERS' GUIDE
and Reference Issue
A McGraw-Hill Publication
330 West 42nd St.
N. Y. 36, N. Y.
ABC
ABP

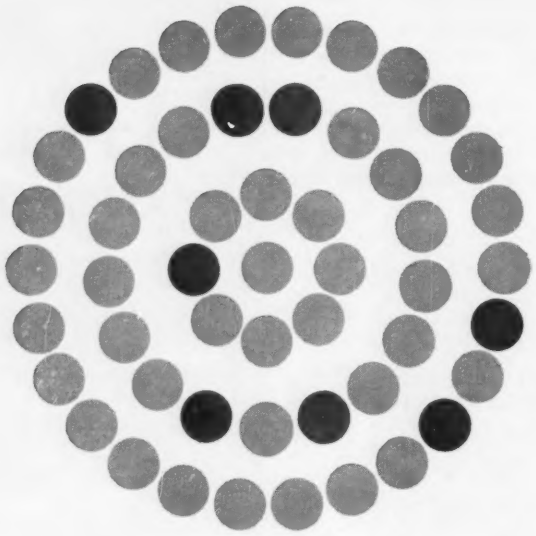

At MOTOROLA in PHOENIX...
There's an uncommon opportunity to BE RECOGNIZED in engineering circles

It's the nature of us humans to be stimulated... to do better work... when others in the same profession know about our accomplishments. At Motorola in Phoenix, the *project approach* assures the engineer that his sparks will not be smothered by anonymity. Every Motorola engineer is provided responsibility commensurate with his ability; his contributions as a member of a project team form the basis for his career advancement. Motorola, heavily engaged in diversified electronics research and production, encourages each engineer to carry his idea through to practical reality. If you are attracted by a creative atmosphere such as this — and by the sunny atmosphere of the nation's most enjoyable climate — write to Mr. Kel Rowan, Department A-9.

MOTOROLA

Western Military Electronics Center 8201 E. McDowell Rd., Scottsdale, Arizona

OPPORTUNITIES

Electronic Engineers, Mechanical Engineers, Physicists—SYSTEM ANALYSIS, DESIGN AND TEST—Radar • Missile Guidance • Navigation • Combat Surveillance • Communications • Field Engineering • Data Processing and Display—CIRCUIT DESIGN, DEVELOPMENT AND PACKAGING—Microwave • Pulse and Video • Antenna • Transistor • R-F and I-F • Servos • Digital and Analog
TECHNICAL WRITERS AND ILLUSTRATORS, QUALITY CONTROL ENGINEERS, RELIABILITY ENGINEERS
Motorola also offers opportunities at Riverside, California and Chicago, Illinois

Literature of

MATERIALS

Protective Surface Coatings. Columbia Technical Corp., 61-05 Thirty-First Ave., Woodside 77, N. Y., has available a chart providing thermal, physical, chemical and electrical characteristics of HumiSeal protective surface coatings for electronics applications.
CIRCLE NO. 450 READER SERVICE CARD

COMPONENTS

Switching Transistor. Texas Instruments Inc., P. O. Box 312, Dallas, Texas. A 6-page folder describes the type 2N705 *pnp* diffused-base mesa germanium transistor.
CIRCLE NO. 451 READER SERVICE CARD

Precision Stock Gears. U. S. Gear Corp., 81 Bay State Road, Wakefield, Mass. A complete line of precision stock gears, 48 through 200 pitch, is covered in a 96-page catalog.
CIRCLE NO. 452 READER SERVICE CARD

Tantalum Slug Capacitors. Ohmite Mfg. Co., 3639 Howard St., Skokie, Ill. Bulletin 159C covers high temperature vibration-shock resistant tantalum slug capacitors.
CIRCLE NO. 453 READER SERVICE CARD

Selenium Rectifiers. Syntron Co., Homer City, Pa., announces a revised catalog on "Selenium Slims" high voltage, cartridge-type rectifiers.
CIRCLE NO. 454 READER SERVICE CARD

EQUIPMENT

Modular Enclosures. Elgin Metalformers Corp., 630 Congdon Ave., Elgin, Ill. Catalog 106 covers the complete line of basic frames and components of the Emcor modular enclosure system.
CIRCLE NO. 455 READER SERVICE CARD

Packaged Modular Control Systems. Airborne Accessories Corp., 1414 Chestnut Ave., Hillside 5,

the Week

N. J. A bulletin describes new packaged modular control systems which are built or assembled entirely from standard units, assemblies and subassemblies. The matched systems are suitable for use in the aircraft, missile, electronic control and related fields.

CIRCLE NO. 456 READER SERVICE CARD

Linear Actuator. Lear, Inc., 110 Ionia Ave., N. W., Grand Rapids 2, Mich. Product Data 102-11 describes model 320 linear actuator, a compact unit especially suited to applications requiring a high degree of positioning accuracy.

CIRCLE NO. 457 READER SERVICE CARD

Basic Noise Source. Kay Electric Co., Maple Ave., Pine Brook, N. J. A recent mailing piece fully describes the Therma-Node, a commercial portable noise generator covering a frequency range of 0.5-1,000 mc.

CIRCLE NO. 458 READER SERVICE CARD

Electronic Generator. Industrial Test Equipment Co., 55 E. 11th St., New York 3, N. Y. A single-page bulletin gives a description and specifications for model 150 precision 160 va electronic generator.

CIRCLE NO. 459 READER SERVICE CARD

FACILITIES

Industrial Rubber Products. Irving B. Moore Corp., 65 High St., Boston, Mass. Purpose of a recent brochure is to acquaint the reader with the company and its facilities for the research, development and manufacture of rubber products for industry.

CIRCLE NO. 460 READER SERVICE CARD

Drawn Metal Shell Production. Cly-Del Mfg. Co., Waterbury, Conn., has available technical and reference material on single multiple-step operations in drawn shell manufacture.

CIRCLE NO. 461 READER SERVICE CARD

Linde RARE GASES
MAKE THEM EQUAL
One tiny glow lamp made by Signalite Incorporated now replaces a standard electron tube. The secret: a fill gas LINDE technicians created from rare gases—neon, argon, krypton, and radioactive krypton 85—allowing Signalite's new manufacturing techniques to be put on a production line basis. LINDE gases aided in increasing current from 0.3 to 20 milliamperes—in light or total darkness—a change that would otherwise require a 40-fold increase in size. Best of all, the cost went from $3.00 to $.17 per lamp.
Uses for these lamps include subminiature voltage regulating tubes, switching devices, lightning arrestors, electronic power supplies, protective devices on explosive equipment, and bright pilot lights. Your own products might similarly benefit from LINDE's technical service and experience in rare gases. For data on the physical and electrical properties of these materials, write Dept. BD, Linde Company, Division of Union Carbide Corporation, 30 East 42nd Street, New York 17, N.Y. In Canada: Linde Company, Division of Union Carbide Canada Limited.
Linde RARE GASES
Symbol of Highest Purity
UNION CARBIDE
LINDE and UNION CARBIDE are registered trade marks of Union Carbide Corporation.

CIRCLE NO. 223 READER SERVICE CARD

Sola Building New Plant

THE SOLA ELECTRIC CO. of Chicago, manufacturer of precision electronic and electric products and components, has begun construction of a 200,000 sq ft plant in Elk Grove Village just northwest of Chicago.

The new building will approximately double Sola's present facilities and enable the firm to effect a production increase of, says company president Joseph G. Sola, "at least 50 percent within the next five years."

Sola Electric, a division of Basic Products Corp. of Milwaukee, will sell its present plant when it shifts operations to Elk Grove Village sometime next summer. Company officials said the new building, equipment and moving would cost about $2 million.

The firm was founded in 1930 as an engineering laboratory. Since then it has grown to become one of the leading designers and producers of specialty dry-type transformers. Its accounts include manufacturers of computers and radar and missile guidance systems.

Office space of approximately 50,000 sq ft in the new building will be air-conditioned. The 150,000 sq ft production area will be thoroughly ventilated and air-filtered for comfort and dirt control.

Arthur L. Myers, Sola vice president-manufacturing, said the new plant, in addition to greater space, will have a more efficient production layout, faster material flow and handling. The plant will also be convenient to railroad, highway and air transportation.

Joins EECO as Head Engineer

KENNETH GOODMAN has been named chief engineer of Engineered Electronics Co., Santa Ana, Calif. He leaves a post of chief customer engineer at Helipot Division of Beckman Instruments, Fullerton, Calif. Prior to that he was engaged as engineering manager of Aerovox Corp., Monrovia, Calif.

Goodman comes to EECO with a complete background in engineering design work, having done such work at AiResearch Mfg. Co., Bardwell and McAlister, Inc., and Logistics Research, Inc., before going to Aerovox.

Engineered Electronics is a subsidiary of Electronic Engineering Co. of California, also located in Santa Ana, which pioneered the use of plug-in electronic circuits for missile and industrial instrumentation control and data handling systems.

Sylvania Sets Up Second N. H. Plant

SYLVANIA'S Semiconductor Division will begin transistor production early next year in Manchester, N. H., planning employment build-up to nearly 1000 people within two years in its second Granite State location.

Company purchased one-story building containing 25,000 sq. ft. on one-acre site. It was formerly occupied by the Arrow Needle Co. Manchester plant will be strictly a production facility, with engineering and other operations continuing at the Woburn, Mass., headquarters of the Semiconductor Division.

At Hillsboro, N. H., Sylvania manufactures diodes.

Hi-G, Inc. Hires Chief Engineer

J. A. GARRATT recently joined Hi-G, Inc., Bradley Field, Windsor Locks, Conn., as chief engineer. He was formerly with Thomas A. Edison Co., having served there as chief product engineer of the instrument division.

Approve License For Sandynamics

SANDYNAMICS, INC., Ramsey, N. J., has been licensed to produce the Markite precision conductive plastic potentiometers. The new facility has been approved by the Dept. of Defense and Dept. of Commerce as a dispersed production source.

Markite Products Corp., New York City, has been formed to handle all sales, and provide extensive technical service for both Markite Corp. and Sandynamics, Inc.

Epsco Appoints Production Mgr.

PHILIP HOOD has been named production manager by Epsco, Inc., Cambridge, Mass. He was formerly with the AC Spark Plug Division of the General Motors Corp., where he held managerial positions in the production and engineering departments.

In his new post, Hood will work closely with the managers of the three Epsco Boston divisions—the

BENDIX-PACIFIC NEEDS SYSTEMS AND CIRCUIT DESIGNERS FOR

advanced submarine detection systems

Unusual Creative Opportunities for

- Electronic engineers with a well rounded background to participate in a unique research and development program.
- Qualified mechanical design engineers including structural thermo-dynamicists in this challenging new field.

SEND RESUME OF YOUR QUALIFICATIONS TO MR. WALKER AT

Bendix-Pacific
DIVISION OF BENDIX AVIATION CORPORATION

WOOD, CALIFORNIA

MUCON perfects a new family of SUBminiature CERAMIC CAPACITORS

NARROW-CAPS to fit



1/10 INCH MODULAR SPACING

"NARROW-CAPS" subminiature ceramic capacitors and 1/10 inch modular spacing of printed circuitry form the newest 'hand-in-glove' team to speed the still smaller assemblies required today.

5 CAPACITANCE VALUES in STOCK

100 mmf. ± 20% . . . 250 mmf. ± 20%
500 mmf. ± 20% . . . 750 mmf. ± 20%
1000 mmf. ± 20% with ambient temperature range –60°C. to 125°C. and a voltage rating of 50WVDC.

MUCON CORPORATION
NINE SAINT FRANCIS STREET
NEWARK 5, NEW JERSEY

CIRCLE NO. 273 READER SERVICE CARD

CIRCULATORS

Basically, the Rantec circulator is a non-reciprocal hybrid junction with three or more ports. Non-basically, the circulator is finding more and more use in advanced radar and microwave systems. In addition, Rantec research and development has led to many other sophisticated "active" and "passive" microwave ferrite components. Your inquiry is welcomed.

rantec *corporation • calabasas, california*

CIRCLE NO. 225 READER SERVICE CARD

10 mc to 44,000 mc with ONE tuning head



PANORAMIC'S SPA-4 SPECTRUM ANALYZER

More exclusive advantages for applications demanding extreme sensitivity, stability, versatility, accuracy.

- Three precisely calibrated amplitude scales—40 db log, 20 db linear, 10 db power.
- Two independent frequency dispersion ranges—continuously adjustable—0-70 mc and 0-5 mc. Negligible internal frequency modulation permits extremely narrow analysis free of FM problems.
- Variable I.F. bandwidth from 1 kc to 80 kc.
- Push-button frequency selector.
- Synchroscope output with 40 db gain.
- Accurate measurement of small frequency differences. A self-contained marker oscillator, modulated by a calibrated external generator, provides accurate differential marker pips as close as 10 kc.

BAND	RF SENSITIVITY*
10 — 420 MC	—95 to —105 dbm
350 — 1000 MC	—90 to —100 dbm
910 — 2200 MC	—90 to —100 dbm
1980 — 4500 MC	—80 to — 95 dbm
4.5 — 10.88 KMC	—80 to — 95 dbm
10.88 — 18.0 KMC	—70 to — 90 dbm
19.0 — 26.4 KMC	—70 to — 85 dbm
26.4 — 44.0 KMC	—55 to — 85 dbm

Tremendous flexibility and many unique advances of Panoramic's compact SPA-4 make it unsurpassed for visually analyzing FM, AM and pulsed signal systems; instabilities of oscillators; noise spectra; detection of parasitics; studies of harmonic outputs; radar systems and other signal sources.

*measured when signal and noise equal 2X noise

Write, wire or phone today for detailed SPA-4 specification bulletin.

the pioneer is the leader

Panoramic
RADIO PRODUCTS, INC.

Ask for new Catalog digest and the PANORAMIC ANALYZER
530 So. Fulton Ave., Mount Vernon, N. Y.
OWens 9-4600
Cables: Panoramic Mt. Vernon, N. Y. State

Systems Division, the Instruments and Equipment Division, and the Components Division—to insure efficient manufacturing operations.

Wilson Directs New Division

BRUSH INSTRUMENTS has appointed Gardner P. Wilson as manager of its newly formed Western Engineering Division in Pasadena, Calif.

Most recently Wilson was with the Electro-Data Division of Burroughs Corp. as manager of the company's Western Engineering Branch. Earlier he served as chief development engineer for Consolidated Electrodynamics Corp.

News of Reps

Lee Mark Associates of St. Louis and Kansas City, Mo., will cover Kansas, Missouri, Nebraska and southern Illinois for Scientific-Atlanta, Inc., Atlanta, Ga., manufacturer of antenna pattern range equipment and related accessories.

Perkin Engineering Corp. Electronic Division, El Segundo, Calif., has named **Law Instruments** of Angola, Ind., its sales rep for Indiana.

Mechtron Laboratories, Peekskill, N. Y., manufacturer of miniature Teflon film insulated magnet wire has appointed several new sales representatives. Reps and their territories are:

W. H. Hicks of Roslyn, N. Y.—New York City and Long Island;

ADVERTISEMENT

On the Market . .

Cold Cathode Tubes
many circuit uses

KIP ELECTRONICS CORP., Box 562, Dept. 96, Stamford, Conn., announces a group of subminiature, cold cathode trigger/timer tubes for precision time delay, relay, pulse, series regulator, timer, & other circuits. These tubes, known also as "krytrons," feature very short anode delay times, exceptionally negligible variation in delay (low "jitter") high hold-off voltages, and all in subminiature envelopes.



One model, KP-130, will replace a timer, trigger, and spark gap tube all in one circuit.

The KP-104 (see cut) is available from stock, as well as the KP-130.

CIRCLE NO. 212 READER SERVICE CARD

Transistor Indicators
single or dual control

The KP-145A and KP-150, subminiature, grid-controlled indicator tubes for single signal and coincidence monitor service in transistor circuits, are now available in production quantities.

Both tubes are made by KIP ELECTRONICS CORP., Box 562, Dept. 97, Stamford, Conn., and they provide a "ball of fire" glow discharge when triggered with low voltage, low current signals. The tubes monitor, indicate & control transistor circuitry.

CIRCLE NO. 274 READER SERVICE CARD

Samuel A. Jeffries, Inc., of Harbeth, Pa.—southern New Jersey, Pennsylvania, Delaware, Maryland, Virginia, West Virginia and Washington, D. C.; **Barrett Border** of Tenafly, N. J.—northern New Jersey; **W. K. Hile** of Charlotte, N. C.—North Carolina, South Carolina, Georgia and Florida; **Roger E. Schlemmer** of Cincinnati, Ohio—Ohio, Indiana and Kentucky; **Lawrence Sales Co.** of Dallas, Texas—Texas, Oklahoma and New Mexico.

Consolidated Avionics Corp., Westbury, N. Y., recently appointed additional reps for its line of transistorized power supplies for electronic equipment. They are: **Roland Olander and Co.** of Los Angeles, for California and Arizona; **J. Y. Schoonmaker** of Dallas, for Texas, Oklahoma, Arkansas and Louisiana; **J. Neal and Co.** of Miami, for Florida, Alabama, Tennessee, Georgia and South Carolina; and **Lowry Dietrich Co.** of Pittsburgh, Cleveland and Dayton, for western Pennsylvania, Ohio, West Virginia and Kentucky.

Electrosources, Inc. of Palo Alto, Calif., was recently named as sales rep for the northern California-Nevada territory by Aircom, Inc., a Winthrop, Mass., firm engaged in design, development and fabrication of microwave components and equipment.

Jim Hastin has acquired sole ownership of Hastin & Browne, manufacturers' rep firm in Honolulu, Hawaii, from Burton Browne. The firm is now known as **Jim Hastin Sales Co.** Browne remains available as a consultant when ever needed.

Bob Gibson has joined **E. V. Roberts and Associates,** Los Angeles electronic engineering reps, as electronics sales engineer.

The United Transformer Corp., New York, N. Y., names **Comtronic Associates** of Mineola, N. Y., as its rep in the New York metropolitan area, servicing industrial accounts.

This is not and is under no circumstances to be construed as an offer to sell, or as an offer to buy, or as a solicitation of an offer to buy, any of the securities herein mentioned. The offering is made only by the Prospectus.

NEW ISSUE

August 25, 1959

353,535 Shares

Cohu Electronics, Inc.

Common Stock

(Par Value $1 per share)

The Company is offering to the holders of its Common Stock the right to subscribe for additional shares of Common Stock at the rate of one share for each three shares held of record at the close of business on August 21, 1959. The subscription offer will expire at 3:30 p.m., Eastern Daylight Saving Time, on September 9, 1959.

Subscription Price $5.25 per share

Copies of the Prospectus may be obtained in any state only from such dealers participating in this issue, including the undersigned, as may legally offer these Securities under the securities laws of such State.

Hayden, Stone & Co.

Winslow, Cohû & Stetson Incorporated

Blair & Co. Incorporated

Francis I. duPont & Co.

Goodbody & Co.

E. F. Hutton & Company

CIRCLE NO. 275 READER SERVICE CARD

Adherence to tightest specifications by skilled assemblers —100% inspection for for perfect construction— precision parts—closely controlled spacing guarantees RELIABLE PERFORMANCE in every SUPERIOR electron gun mount.

At your service for any type of electron gun mount. Samples, catalogs, prices available on request.

DON'T BE FOOLED BY LOOK-ALIKES

Superior Electronics Corporation

208 Piaget Avenue, Clifton, New Jersey • GRegory 2-2500

CIRCLE NO. 227 READER SERVICE CARD

Professional Opportunities Are Available For

Electrical Engineers

with interest and experience in the following fields:

- Design and Development of:
  Industrial Electronics and Power Controls and Instrumentation Electronics
- Operation & Maintenance of Nuclear Devices

For information please write to:

Personnel Manager

Brookhaven National Laboratory

UPTON, LONG ISLAND, N. Y.

BROOKHAVEN NATIONAL LABORATORY
A Center for Nuclear Research and Development
UPTON-NEW YORK

500-2500 BAUD DATA TRANSCEIVER FOR VOICE BANDWIDTH CIRCUITS

TYPICAL ERROR RATE
2 HITS/HOUR

Recorded during 200 hours of operation at 2500 baud over more than 25 different private wire voice circuits.

CONDENSED SPECIFICATIONS

REQUIRED SIGNAL TO RMS NOISE	12 db for error rate < 1 in 10^4; 14 db for error rate < 1 in 10^6
SPEED	600, 1200, and 2400 baud, 1500, 1667, and 2500 baud; any 3 predetermined rates between 500 and 2500 baud with internal synchronization or any rate between 500 and 2500 baud with external synchronization.
DELAY EQUALIZATION	Adjustable from 0.8 to 3.5 ms; frequency of max. delay settable from 1 to 2 kc.
TRANSMITTER INPUT LEVEL	+5 volts min., +50 volts max., ground-referenced digital information at bit rate.
TRANSMITTER OUTPUT LEVEL	−20 to +6 dbm
RECEIVER INPUT LEVEL	−40 to +10 dbm (Automatic Gain Control)
RECEIVER OUTPUT LEVEL	±2 volts ±10%, ground-referenced information at bit rate.

THE SEBIT-25 is a wire line terminal unit for transmitting and receiving binary information at 500 to 2500 baud (bits/sec) in a nominal 3-kc voice band, such as a long distance toll circuit. This simple AM system (SEBIT-25) uses vestigial sideband transmission and synchronous operation. It includes time delay and amplitude distortion compensating circuits. The equipment is 100% transistorized and has been carefully engineered to function properly under a wide variety of environmental conditions. Voice override is included so that the circuit can be used as an order wire. The SEBIT-25 finds use in transmitting: high speed data between business machines and computers; high speed facsimile information; time division multiplex information; and sequential transmitting of telemetering data. Write or phone for technical literature, prices, and delivery time.

RIXON
ELECTRONICS, INC.
2414 Reedie Dr. • Silver Spring, Md. • LO 5-4578

COMMENT

Temperature Chart

In attempting to use your Temperature Rise Chart (p 106, Oct. 10 '58) we uncover an apparent error. It is that the extreme right-hand scale marking on the upper scale is omitted. In assuming that this marking was 20 C rise, as indicated by comparison of the rest of the scale and lack of any marks indicating a break or discontinuity, then the temperature rise of the example in the next-to-last paragraph would be 26 C instead of the indicated answer of 20 C.

On the other hand, examination of slopes of the lines below 30 C and the slopes above 30 C indicates a change in the scale and that the scale mark should be 0 C. If this modified scale is accounted for, then the rise of the example would be 20 C as indicated. It is obvious, therefore, that the chart was modified at 30 C in order to fit the available space, and that the extreme right-hand scale marking was omitted.

Another problem encountered in attempting to use this information is that it is unwise to assume that the material being tested is copper of 100-percent conductivity. Therefore the use of the constant 234.5 as referenced, without experimental proof for the particular material, is not recommended. The determination of a factor K to replace your value of 234.5 by measurement of resistance variation during a known temperature change is suggested in order to make your information more universal.

BERNARD C. BARNES
NORTH AMERICAN AVIATION
COLUMBUS, O.

More on Diode Terms

The editorial comment on the use of the words *diode* and *rectifier* (p 95, July 3) is well put, but reader Rogers' remarks on symbol polarity are unfortunate.

A diode—whether detecting, conducting, blocking or rectifying—is always a sink, and as such its positive terminal is the anode. A d-c power supply employing one or

Get out your pencil and help yourself to

electronics READER SERVICE

it's free—it's easy—
it's for your convenience

Use these handy READER SERVICE CARDS for more information on:

ADVERTISEMENTS—NEW PRODUCTS—
LITERATURE OF THE WEEK

1—Circle the number on the postpaid card below that corresponds to the number at the bottom of Advertisement, New Product item, or Literature of the Week selection.

2—Please print carefully, as it is impossible to process cards that are not readable.

A

FOR SPECIFIC ITEMS IN MULTI-PRODUCT ADVERTISEMENTS

For more information on specific items in multi-product advertisements, print carefully on the Reader Service Card below in Box "A" the circle number of the advertisement and the specific product(s) on which you desire more information.

**HOW TO SUBSCRIBE—
HOW TO RENEW YOUR SUBSCRIPTION
TO electronics**

If you are not a subscriber, or if your subscription is about to expire, to receive **electronics** regularly, fill in the section "FOR SUBSCRIPTIONS" on a card below. Send no money, **electronics** will bill you at the address indicated on the Reader Service Card.

Correct amount of POSTAGE must be affixed for all FOREIGN MAILINGS

Correct amount of POSTAGE must be affixed for all FOREIGN MAILINGS

SEPT 11-59
CARD EXPIRES
NOV 11-59

electronics • READER SERVICE CARD • Please Print Carefully

YOUR NAME _____ POSITION _____

COMPANY _____

ADDRESS _____

CIRCLE THESE NUMBERS WHEN INTERESTED IN ALL ITEMS SHOWN IN ANY ADVERTISEMENT

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42
43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63
64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84
85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105
106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126
127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147
148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168
169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189
190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210
217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237
244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264
271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291
298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318
325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345
352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372
379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399
406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426
433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453
460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480
487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507
514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534
541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561
568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588

211	212	213	214	215	216															
238	239	240	241	242	243															
265	266	267	268	269	270															
292	293	294	295	296	297															
319	320	321	322	323	324															
346	347	348	349	350	351															
373	374	375	376	377	378															
400	401	402	403	404	405															
427	428	429	430	431	432															
454	455	456	457	458	459															
481	482	483	484	485	486															
508	509	510	511	512	513															
535	536	537	538	539	540															
562	563	564	565	566	567															
589	590	591	592	593	594															

FOR SUBSCRIPTIONS:
(CHECK ONE BOX)

☐ NEW ☐ RENEWAL

(CHECK ONE BOX BELOW)

DOMESTIC	☐ 1 yr.	— $ 6.00
	☐ 3 yrs.	— $12.00
CANADA	☐ 1 yr.	— $10.00
FOREIGN	☐ 1 yr.	— $20.00

Product(s) manufactured: _____

or Service(s) Performed: _____

A	Circle No.	Product

INSIDE FRONT COVER INSIDE BACK COVER

ONE!

In every industry there's always ONE accepted Product and Data Buying Book... in electronics it's the BUYERS' GUIDE — fundamental in any sales program aimed at the electronics and allied industries. Its 52,000 paid subscribers are important Design-Research/Production/Management Engineers, who, individually, or working in combination with one another, influence the purchase of products, materials and services... whatever is bought by the entire industry.

electronics

A McGRAW-HILL PUBLICATION

330 West 42nd Street • New York 36, N.Y.

BUSINESS REPLY MAIL

NO POSTAGE STAMP NECESSARY IF MAILED IN THE UNITED STATES

FIRST CLASS
PERMIT NO. 64
(SEC. 34.9 P.L.&R.)
NEW YORK, N. Y.

6¢ Postage Will Be Paid By

ELECTRONICS

Reader Service Dept.

330 West 42nd Street

New York 36, N. Y.

ACE PLASTIC EXTRUSIONS

SHAPES • CHANNELS SPLINES • PROFILES CORNER MOLDINGS RODS • TUBES

IN THESE PLASTICS

ACRYLICS • ACETATE • BUTYRATE
STYRENE • POLY CARBONATE
POLY PROPYLENE • METHYL STYRENE
ETHYL CELLULOSE • POLYETHYLENE
VINYLS — *ELASTOMERIC AND RIGID*

FAST DELIVERY

Write, wire phone for Bulletin ES, samples and prices . . . or send specifications, blueprints for immediate quotations.

ACE PLASTIC COMPANY
91-33 Van Wyck Expwy., Jamacia 35, N. Y.
JAmaica 3-5500

CIRCLE NO. 277 READER SERVICE CARD

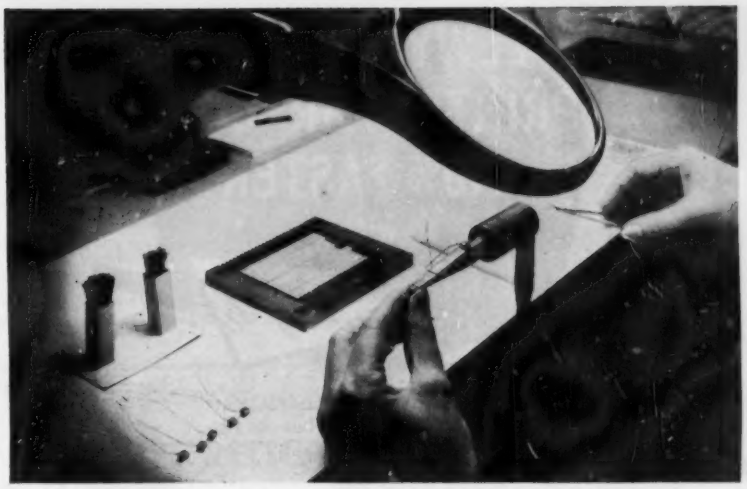

Attach Leads to Ultra-Fine Magnet Wire? Sure!! ...and Economically

Send for samples illustrating how Deluxe Coils' advanced engineering and manufacturing know-how can supply miniaturized coils (48-56 gauge wire) *with leads.* Cut your scrap and termination problems.

DELUXE COILS, INC.
POST OFFICE BOX 318 • WABASH, INDIANA

CIRCLE NO. 278 READER SERVICE CARD

GOERZ FOR INSTRUMENT CALIBRATION TO... ±0.05%

PHYSICS RESEARCH LABORATORIES, Inc. proudly announces the availability of the famed C. P. Goerz AC/DC Comparator. The Goerz Comparator is a basic standardizing instrument offering accuracies in the ±0.05% class. The accuracy of ±0.05% is referred to *true value, not* full scale. It holds for *current, voltage* and *power* in the following ranges up to and including 1000 c. p. s.:

CURRENT: 0-50 ma; 0.2/0.5/1/2/5/10/20/50/100/125 amperes;

VOLTAGE: 0-15; up to 600 volts in 5-volt steps;

POWER: Up to 600 volts; up to 100 amperes.

All quoted accuracies are based on the accessories supplied with the instrument. Higher current and voltage available with special accessories.

For Optical Equipment: Write To
Goerz American Optical Co.
Inwood, L.I., N.Y.

Further details are available upon request in PRL technical note 319 ADC.

Physics Research LABORATORIES
House of Fine Instruments
P.O. Box #555 Hempstead, L. I., N. Y.

CIRCLE NO. 231 READER SERVICE CARD

LEWYT DRILLS PRINTED CIRCUITS 110% FASTER with Engravograph

Writes Lewyt engineer Murray Berman:

"... Not only did New Hermes Engravograph increase our production by this amazing figure, but it also enabled us to achieve consistently better quality."

- Pantograph reproduces drill pattern from template in any reduction ratio—assuring high accuracy with unskilled labor.
- Allows drilling and routing of different size holes in one operation without changing tools.

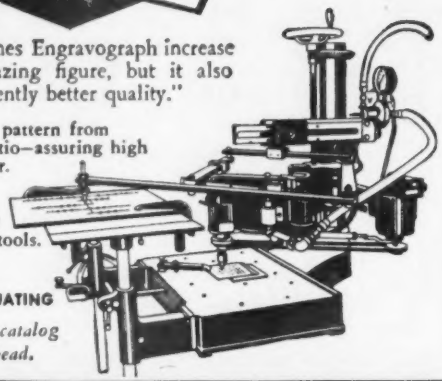

Also for tracer-guided
ENGRAVING · PROFILING · GRADUATING

Request our 28-page illustrated catalog ZP-2 on your business letterhead.

new hermes ENGRAVING MACHINE CORP. 154 West 14th Street, New York 11, N. Y.

CIRCLE NO. 279 READER SERVICE CARD

SIEMENS

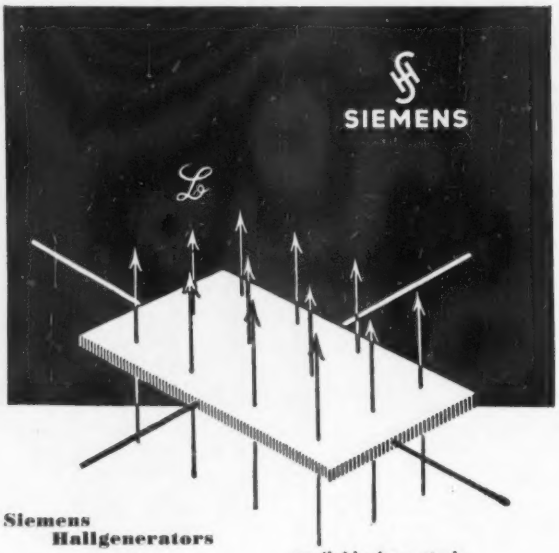

Siemens Hallgenerators

GRH Gaussmeters

GRH Coercimeters

available from stock ranges from 0-50 up to 0-20000 gauss, no amplifier for instant indication of H_{ci}

GRH Halltest Company

authorized US representative for Siemens Hallgenerators

157 S. Morgan Blvd., Valparaiso, Ind.

GRH

232 CIRCLE NO. 232 READER SERVICE CARD

more diodes as rectifiers may, of course, be treated as a source, with its positive output terminal that to which the cathodes of the component diodes are connected. But the components themselves do not lose their status as sinks, and should not otherwise be marked.

It would be helpful if manufacturers of open-stack metallic rectifiers would content themselves with marking the terminals of their products black and red to denote anode and cathode, and avoid using either color for the body of the device. If suppliers of cylindrically encapsulated units would follow suit, and abandon all reference to *plus* or *minus* terminals, then life would be much more tranquil for those of us who use such diodes in nonrectifying applications.

JAMES R. WYLIE
LEICH ELECTRIC CO.
GENOA, ILL.

Our Far-Flung Correspondents

Today we received your shipment of ELECTRONICS Buyers' Guides for our radio-television repair school. . . . Please allow me to express our appreciation to you and your magazine for your wonderful interest and assistance in our (repair school) project.

J. VON KANEL
LONDON PRISON FARM
LONDON, O.

Reader von Kanel is director of education at the London Prison Farm, and has great aspirations for using electronics training as part of the rehabilitation program there.

Security and Mr. Greene

I have just read the article by Howard Janis on the matter of security and its effect on W. L. Greene ("New Security Policy Coming?" p 34, July 31).

The article describes quite well a state of affairs which one believed to exist on another continent.

I am an immigrant from Europe; the direction in which I travelled was *west*, wasn't it?

STANLY FROUD
MONTREAL, QUE.

We profoundly hope that the direction will continue to have some significance.

•CONTACTS•

FOR THE FIELD OF ELECTRONICS

"HOW TO MAKE MONEY IN Mobile Radio Maintenance"

AUTHORITATIVE GUIDEBOOK ABOUT THE BOOM IN TWO-WAY MOBILE RADIO! GIVES FACTS, FIGURES, PAY RATES, WRITE TODAY!

FREE

LAMPKIN LABORATORIES, INC. Instrument Div. BRADENTON, FLA.

BEST PLACE TO STAY IN L.A.

New super-MOTEL, luxury furnishings. Swimming pool, utter privacy, free TV, 24-hr. tel. service. Single rooms or suites. Heart of S.E. industrial area. 10 mins. from dntn. L.A. Handy all freeways. Clean. Commercial rates.

DOWNEY-CAPRI MOTEL, 8220 Telegraph Rd. between Lakewood & Paramount Blvds.

PROFESSIONAL SERVICES

YARDNEY ELECTRIC CORP.

"Pioneers in Compact Power" *

Electro-Chemical Generators of Energy

"from milliwatts to megawatts" *

40-50 Leonard Street, New York 13, N. Y. WOrth 6-3100 * T.M.

Your Inquiries to Advertisers Will Have Special Value...

—for you—the advertiser—and the publisher, if you mention this publication. Advertisers value highly this evidence of the publication you read. Satisfied advertisers enable the publishers to secure more advertisers and—more advertisers mean more information on more products or better service—more value—to YOU.

EMPLOYMENT OPPORTUNITIES

The Advertisements in this section include all employment opportunities—executive, management, technical, selling, office, skilled, manual, etc.

Positions Vacant	Civil Service Opportunities	Employment Agencies
Positions Wanted	Selling Opportunities Wanted	Employment Services
Part Time Work	Selling Opportunities Offered	Labor Bureaus

DISPLAYED ——RATES—— **UNDISPLAYED**

The advertising rate is $28.67 per inch for all advertising appearing on other than a contract basis. Contract rates quoted on request.

An advertising inch is measured ⅞" vertically on a column—8 columns—30 inches to a page.

Subject to Agency Commission.

$2.40 per line, minimum 3 lines. To figure advance payment count 5 average words as a line.

Box Numbers—counts as 1 line.

Discount of 10% if full payment is made in advance for 4 consecutive insertions.

Not subject to Agency Commission.

Send NEW ADS to CLASSIFIED ADV. DIV. of ELECTRONICS, P.O. Box 12, N. Y. 36, N. Y.

High Level Openings at AVCO for

- **THEORETICAL PHYSICISTS**
- **EXPERIMENTAL PHYSICISTS**
- **PHYSICAL CHEMISTS**
- **ENGINEERS**

New and expanding programs concerned with the design, development, and flight evaluation of the Titan and Minuteman re-entry vehicles have opened up exceptional opportunities in the following areas:

Plasma Jets, Gaseous Discharge Phenomena, Plasma Physics

High-temperature Chemistry of Solids and Gases, High-temperature Properties of Materials, Vapor Pressure, Decomposition Species, Radiation Measurements

Microwaves, Telemetry, Propagation through Ionized Gases, Basic Space Communication Studies

Upper-Atmosphere Phenomena, Missile Detection and Discrimination, Advanced Missile Warfare Concepts

Hypervelocity Ballistics and Advanced Ballistic Techniques

Development of new sensors and recording devices for measuring high-temperatures, pressure, velocity, etc. under unusual conditions, microminiaturization

Advanced electronic circuits for missile-borne, missile detection, and monitoring instrumentation, including transistorized circuitry development. Ultra-high-speed optical and electronic instrumentation for laboratory and ballistics application. Radiometric measurements in the ultra-violet, visible and infrared.

Energy Conversion and Power Supply Studies

Broad solid-state program for theoretical and experimental research on high-temperature materials involving materials preparation, measurement of electrical and other properties, and device fabrication.

Challenging opportunity to apply unusual high temperature techniques developed in the Division to these areas.

The division's fully equipped laboratory and new suburban location provide an unusually attractive working, and recreational environment. Excellent opportunities exist for independent research .

Write to: Mr. Richard Rubino
Scientific & Technical Relations
Dept. E-9

Your reply will be accorded absolute confidence and you will receive a prompt answer.

AVCO
Research & Advanced Development

201 Lowell St., Wilmington, Mass.

Scheduled to open about the first of the year, Republic's new Research & Development Center at Farmingdale, Long Island, New York, will comprise seven different laboratory facilities. Included are an Electronic Development Laboratory and a Guidance and Control Systems Laboratory. These modern facilities will contain the most up-to-date equipment obtainable for the research, development and test of advanced astrionic and avionic systems, equipments and components.

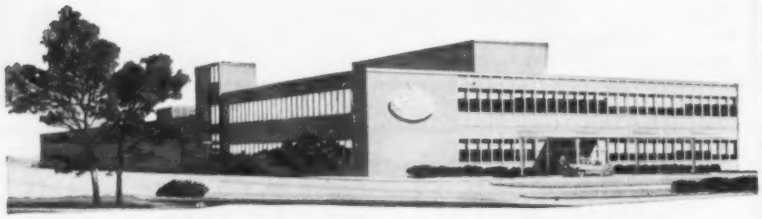

ELECTRONIC ENGINEERS...

■ You can be one of the R&D men who'll help guide exotic projects at Republic Aviation's new $14,000,000 Research and Development Center

IN-AT-THE-BEGINNING OPPORTUNITIES at Republic's new Research Center encompass the electronic aspects of a wide diversity of projects and investigations, from space probes to ballistic missiles, from high Mach aircraft to helicopters, from automatic ground control equipment to exotic detection systems. Today Republic's dynamic expansion in research and development activities offers you assignments where you can win technical renown — and rapid personal advancement — in any of these areas:

■ INERTIAL GUIDANCE & NAVIGATION ■ SYSTEMS ENGINEERING ■ DIGITAL COMPUTER DEVELOPMENT ■ INFORMATION THEORY ■ TELEMETRY-SSB TECHNIQUE ■ RECEIVER & TRANSMITTER DESIGN ■ JAMMING & ANTI-JAMMING ■ RANGING SYSTEMS ■ GROUND SUPPORT EQUIPMENT ■ DOPPLER RADAR ■ COUNTERMEASURES ■ RADOME & ANTENNA DESIGN ■ MICROWAVE CIRCUITRY & COMPONENTS ■ AIRBORNE NAVIGATIONAL SYSTEMS ■ MINIATURIZATION-TRANSISTORIZATION ■ PROPAGATION STUDIES ■ INFRARED & ULTRA-VIOLET TECHNIQUES

Address your resume in confidence to:
Mr. George R. Hickman
Engineering Employment Manager, Dept. 11J-2

REPUBLIC AVIATION

Farmingdale, Long Island, New York

ENGINEERS

A FINER CLIMATE

TO WORK IN...

...TO LIVE IN

At Sylvania's Mountain View Operations in California
(SAN FRANCISCO BAY AREA)
you'll discover more than just one kind of climate.

PROFESSIONAL CLIMATE – Advanced programs will challenge your technical creativity. You'll make major contributions in the fields of electronic defense, radar, communications and data processing systems. Because Sylvania is one of the nation's fastest growing electronics organizations, there are an unusual number of growth opportunities.

LIVING CLIMATE–You and your family will enjoy the healthful atmosphere and sunny climate of the San Francisco Peninsula. You'll find plentiful housing, excellent shops, fine schools and year round recreation.

Openings in:

System Studies / Circuit Design / Computers & Data Handling / Electronic Packaging / Development Engineering / Concept & Planning / Advanced ECM Circuitry / Equipment Development / Product Engineering / Tube Engineering / Tube Application Engineering / Mechanical Engineering / Tube Production Engineering / Theoretical Physics / Experimental Physics / Mathematics / Microwave Engineering / Engineering Writing / Tube Research Engineering

You may communicate in confidence to Wayne L. Pearson

Mountain View Operations / SYLVANIA ELECTRONIC SYSTEMS
A Division of
SYLVANIA
Subsidiary of GENERAL TELEPHONE & ELECTRONICS

P.O. Box 188
Mountain View, California

CAREER OPPORTUNITIES AT TI



CIRCUIT DEVELOPMENT ENGINEER

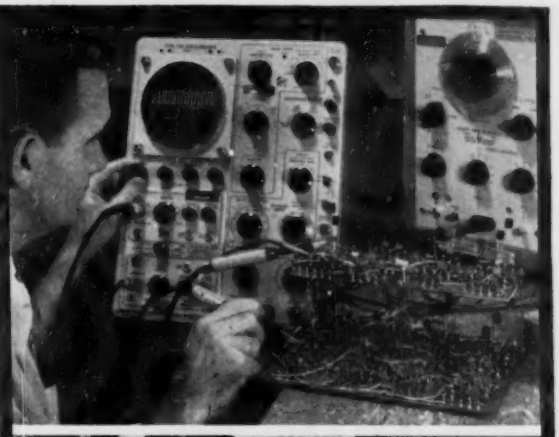

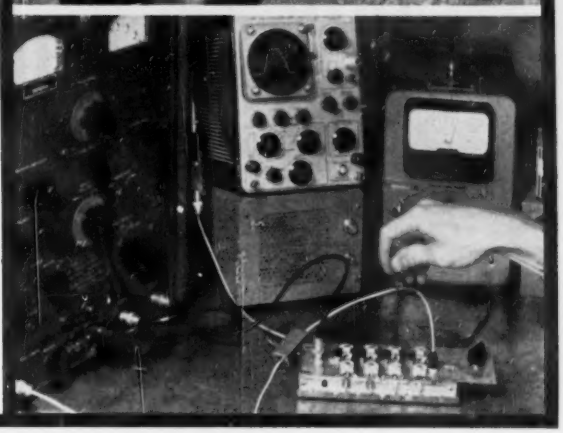

your future: a challenging opportunity with an industry leader

At Texas Instruments, your future is filled with specific, stimulating growth assignments in evaluating and characterizing transistors and special semiconductor devices. You'll participate in such transistorization projects as:

- **AM, FM, and TV receivers**
- **audio and video, i-f and r-f amplifiers**
- **hi-fi and electronic organs**
- **nonlinear and switching circuits**
- **computer system logic**
- **servo and power amplifiers**

With TI . . . receive liberal company-paid benefits, including profit sharing *(last year 15% of base salary)* . . . enjoy premium living in a moderate climate with excellent neighborhoods, schools and shopping facilities . . . work in a plant selected as one of the 10 outstanding U. S. industrial buildings of 1958.

Interviews will be held in your area soon. If you have an Electrical Engineering degree and/or knowledge of transistor circuitry, please send a resume to

C. A. Besio, Dept. 200

For immediate Eastern appointment, contact H. C. Laur Dept. 200-E 1141 E. Jersey St. Elizabeth, N. J.

TEXAS INSTRUMENTS INCORPORATED

SEMICONDUCTOR - COMPONENTS DIVISION

POST OFFICE BOX 312 • DALLAS, TEXAS

electronic engineers

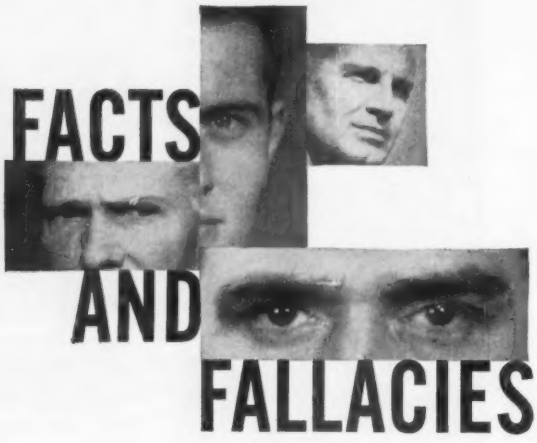

FACTS AND FALLACIES

ABOUT CAREERS IN COMMERCIAL COMMUNICATION SYSTEMS

ideas worth re-examination, from General Electric's Communication Products Department

TECHNICAL CHALLENGE Many of the engineers we talk with are genuinely amazed at the sophistication of the systems under development here. Far from the "bread boxes" filled with routine circuitry they expected, they find advanced electronic systems utilizing parametric and tunnel effect devices, transistor and miniature tube circuitry, piezoelectric and electromechanical filters, etc.

SCOPE OF PROJECTS Don't anticipate a narrow range of products and opportunities here. CPD's diversified product line includes complete Microwave Radio Relay, Mobile and Personal communication systems, to name only a few. Work in these areas has found application in other projects for the Military, e.g., developing a 24 channel SSB Tropospheric scatter system. Our continued expansion is from a broad and stable base.

SHARE IN MANAGEMENT ASPECTS Rather than confining your activities to the technical aspects of your project exclusively, you have the opportunity to operate in management areas as well. Here you would be making broad decisions, based on the results of idea interchange between you and your counterparts in Marketing, Product Planning, Manufacturing, Field Service, etc. This exposure to both engineering and management functions is seldom found elsewhere in industry.

but this is only part of the CPD story. Learn more about the opportunities and advantages awaiting you, both on and off the job, by mailing your resume today to Mr. Arthur Guy at the address below.

IMMEDIATE OPENINGS IN THESE AREAS **MICROWAVE: R.F. Circuit Design, Multiplex Equipment, Systems Design. ADVANCE ENGINEERING: Microwave Circuitry, Plumbing, Antennas, Solid State Devices. MOBILE SYSTEMS: Transmitter Design, Receiver Design, Product Production Engineering, Equipment Mechanical Design. AUTOMATIC TEST EQUIPMENT: Design and Development.**

Forward your resume in confidence to Mr. Arthur Guy, Dept. 69-W J

COMMUNICATION PRODUCTS DEPARTMENT

GENERAL ELECTRIC

Mountain View Road, Lynchburg, Virginia

PROFESSIONAL GROWTH IN A NEW FIELD:

DATA SYSTEMS IN UNDERWATER RESEARCH

Work is expanding at IBM on the design of new information-handling techniques required to explore the depths of the ocean. These investigations in oceanography are expected to have far-reaching scientific and military implications. Original and basic work will be needed in acoustics, information theory, advanced network theory, delay lines and cross-correlation techniques. Work will include systems design, real-time data processing, analysis of experimental equipment, and hybrid analog-digital techniques in unique data processing configurations. All phases of these varied projects will provide excellent career opportunities for Data Processing Systems Engineers.

DATA PROCESSING SYSTEMS ENGINEERS

B.S., M.S. or Ph.D. in E.E. Experience desirable in development of one or more of these areas: Navy sonar, fire control, ASW, or navy navigational data processing systems. Experience desired in analog and digital special-purpose instrumentation, conversion equipment, electronic correlation devices, displays and delay lines.

You will enjoy unusual professional freedom and the support of a wealth of systems knowledge. Comprehensive education programs are available—plus the assistance of specialists of many disciplines. Working independently or with a small team, your individual contributions are quickly recognized and rewarded.

Write, outlining your qualifications and experience, to:

Mr. R. L. Lang, Dept. 554121
IBM Corporation
Owego, New York

IBM

INTERNATIONAL BUSINESS MACHINES CORP.

VITRO EXPANDS

Increased R&D activities at Vitro Laboratories at West Orange, New Jersey, have created opportunities for engineers and scientists interested in diversified projects.

SENIOR SYSTEMS ANALYSTS

Analysis and synthesis of complex weapons systems involving aircraft, naval vessels, guided missiles or torpedos.

ELECTRONIC ENGINEERS

Circuit Design of specialized instrumentation related to radar systems.
Transistor Circuitry.
Digital Systems (Logical design, data handling).

MATHEMATICAL STATISTICIANS

Advanced navigational systems.
Information Analysis.
Reliability.

OPERATIONS RESEARCH ANALYSTS

Complex Military Systems requiring familiarity with military tactics and logistics.

PHYSICISTS

Plasma, nuclear and solid state physics involving studies of electromagetic theory, effects at high altitudes and high temperatures, and the formation and application of exotic materials.

Liberal benefits include a tuition refund plan and relocation allowances. All inquiries in confidence. Send resume including salary requirements to Mr. S. Roberts.

Vitro LABORATORIES

Division of Vitro Corp. of America

200 Pleasant Valley Way,
West Orange, New Jersey

(Other laboratories located at Eglin AF Base, Florida & Silver Spring, Maryland.)

ELECTRONICS ENGINEERS

Check Your Knowledge Of America's "Most Surprising City"...



TAKE THE MAN who's never seen Detroit . . . or Philadelphia . . . or Los Angeles . . . and he can give you a passably accurate description of those cities. But ask that same fellow to describe Kansas City and—if he's never been here—he'll give you some funny answers. He may think, as many do, that our terrain is flat and tree-less. (Fact is, it's fairly hilly and heavily-wooded.)

Because of their preconceived ideas, newcomers to Kansas City are always surprised. Visitors from overseas tell us this is one of America's most beautiful cities. Easterners are first puzzled, then envious when they encounter the midwesterner's casual living, open friendliness and enthusiasm. Many visiting editors have rushed home to write barbed editorials prodding their civic leaders to follow our example in rejuvenating depressed areas, in solving traffic problems and in providing adequate well-rated schools.

You needn't take our word for all this . . . come see this "most surprising city" for yourself. Particularly do we hope you'll visit us at Bendix. We sincerely believe we can help you to advance your professional career. As a long term prime contractor for the AEC, we are an expanding, engineer-managed, engineering corporation. Obviously, we offer you a congenial professional climate, highly conducive to your personal progress.

We have openings for electronics engineers in numerous activities at various levels of responsibility. To feel at home in these positions you'll need at least a BS in EE or physics and a minimum of 5 years' recent applicable experience. May we tell you more about the following?

CAN YOU MATCH THESE WITH PHOTOS ABOVE?

- ☐ LINDA HALL LIBRARY. One of the nation's finest technical libraries.
- ☐ STARLIGHT THEATRE. Huge outdoor theatre featuring top theatrical talent.
- ☐ UNIV. OF KANSAS. One of several universities offering advanced study.
- ☐ LAKE OF THE OZARKS. All water sports. Near enough for summer weekends.
- ☐ K. C. PHILHARMONIC. Under the baton of renowned conductor Hans Schwieger.
- ☐ MUNICIPAL STADIUM. Home of the American League Kansas City "Athletics".

SOLUTION: By curious coincidence, the answer spells B-E-N-D-I-X, a word which might also spell the answer to your professional future.

- **DESIGN & DEVELOPMENT**
- **RELIABILITY**
- **COMPONENTS**
- **ELECTRONIC AUTOMATION**
- **VACUUM TUBE APPLICATION**

Mail brief confidential resume to
Mr. T H. Tillman,
Professional Personnel,
Bendix, Box 303-KU
Kansas City, Missouri

Bendix AVIATION CORPORATION

KANSAS CITY DIVISION

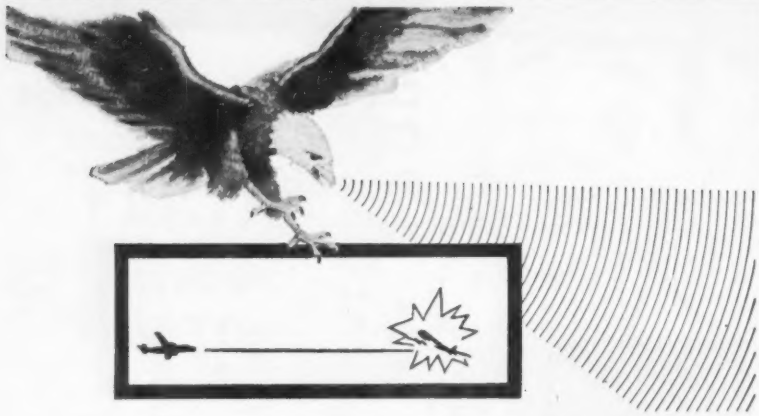

Engineers Face New Challenge as **SANDERS**

"SHARPENS THE EYES OF THE EAGLE"

Latest among many exciting projects now at Sanders Associates is development of a complex terminal guidance seeker system for the Navy's exceptionally accurate air-to-air Eagle missile that can seek out, maneuver to intercept and destroy a target at long range.

Advancing the state-of-the-art is expected at Sanders, where technical firsts include PANAR® radar, TRI-PLATE® microwave products, FLEXPRINT® flexible printed circuits and cabling, subminiature rate gyros and blowers.

If you are an engineer with a creative turn of mind, Sanders offers you a dynamic working environment . . . where ideas are respected and encouraged by engineering management . . . and assignments in a variety of areas.

You will receive competitive salaries plus extensive benefits, and your whole family will enjoy the advantages of Sanders' location in Nashua, New Hampshire, just an hour from downtown Boston. This thriving community in the beautiful New Hampshire hills has excellent schools, fine homes, every recreational facility—and the cost of living is low.

Immediate Openings In:

SYSTEMS ENGINEERING —*All levels of engineers to conduct studies, design and analyses of missile and other weapons systems. Applicable areas of interest include: systems integration, coherent radar and missile systems, steerable antenna array techniques, acquisition and surveillance radars, countermeasures, CW pulse transmitters, data processing and guidance. R&D and Field.*

RELIABILITY ENGINEERING —*All levels of engineers to assume responsibilities for reliability prediction, design reviews, components evaluation, failure effect analysis, redundancy in design and environmental testing.*

SPECIFICATION ENGINEERING—*All levels of engineers to assure conformance of system, environmental, component and process specifications with applicable military formats. Also to establish and revise company standards.*

CIRCUIT DESIGN— *Engineer & Sr. Engineer levels to perform design of basic circuits relating to missile and other weapons systems. Areas of interest include tube and transistor application to receivers, modulators, transmitters, range tracking, logic, power supplies, parametric amplifiers and other allied circuits. Knowledge of MIL specs desired.*

MECHANICAL ENGINEERING —*All levels of engineers to perform broad phases of mechanical engineering activities as pertaining to electronic, missile, airborne and ground equipments. Responsibilities relate to such specialized areas as vibration, stress analysis, heat transfer, plastics and metals, airborne and missile packaging, RF shielding, chassis and structures design, and machine shop techniques.*

If you are qualified and interested in one of the above areas, send your resume to
Lloyd R. Ware, Staff Engineer

SANDERS ASSOCIATES, INC.

®Trademark reg. US Patent Office

NASHUA, NEW HAMPSHIRE

TRANSFORMER ENGINEERS

Exp. design audio, power, pulse x'formers. MIL and commercial specs.
All Benefits.
MICROTRAN CO., 145 E. Mineola Ave., Valley Stream, L. I., N. Y. LOcust 1-6050

ADDRESS BOX NO. REPLIES TO: Box. No. Classified Adv. Div. of this publication. Send to office nearest you.
NEW YORK 36: P. O. BOX 12
CHICAGO 11: 520 N. Michigan Ave.
SAN FRANCISCO 4: 68 Post St.

POSITION VACANT

B.S. and M.S. Electrical Engineers for research work on instrumentation and control problems related to the steel industry. Salary commensurate with training and experience. Large Research Laboratory, Pittsburgh Area. Forward complete resume and salary requirements to P-2283, Electronics.

For Additional Information

About Classified Advertising,

Contact The McGraw-Hill Office Nearest You.

ATLANTA, 3
1301 Rhodes-Haverty Bldg. JAckson 3-6951
M. MILLER

BOSTON, 16
350 Park Square HUbbard 2-7160
D. J. CASSIDY

CHICAGO, 11
520 No. Michigan Ave. MOhawk 4-5800
W. HIGGENS - E. S. MOORE

CLEVELAND, 13
1164 Illuminating Bldg. SUperior 1-7000
W. B. SULLIVAN - T. H. HUNTER

DALLAS, 2
1712 Commerce St., Vaughn Bldg. RIverside 7-5117
GORDON JONES - F. E. HOLLAND

DETROIT, 26
856 Penobscot Bldg. WOodward 2-1793
J. R. PIERCE

LOS ANGELES, 17
1125 W. 6th St. HUntley 2-5450

NEW YORK, 36
500 Fifth Ave. OXford 5-5959
H. T. BUCHANAN - R. P. LAWLESS
T. W. BENDER

PHILADELPHIA, 3
Six Penn Center Plaza LOcust 8-4330
H. W. BOZARTH

ST. LOUIS, 8
3615 Olive St. JEfferson 5-4867

SAN FRANCISCO, 4
68 Post St. DOuglas 2-4600
S. HUBBARD

TELEVISION PROJECT ENGINEER

Growth & diversification program provides opportunity for several development and design engineers. Background should include three to four yrs. of video circuit design, pulse techniques, r-f, camera tube circuitry and similar activity.

PHOTOSURFACE PHYSICIST

Must be well grounded in development, formation and measurement of photosensitive surfaces. Background should include high vacuum technique, tube design, electron optics and associated skills.

Well established company has impressive record of achievement in industrial field and seeks well qualified men to continue this progress.

Please send resume to:

General Manager, Electronics Div.
Diamond Power Specialty Corp.
Box 415, Lancaster, Ohio

ELECTRONIC ENGINEERS

A leading, independent research organization has two positions available for men with BS or MS degrees in electronic engineering from accredited colleges. Men with 1-10 years' experience in development of vacuum tube, transistor or relay circuits, or recent college graduates will be considered. Salary commensurate with qualifications. Interesting, unusual work in data transmission and retrieval and digital computing. Non-military work within small group. Individual effort recognized—good job security—ideal working conditions. All benefits. Long-established firm located on Chicago's North Shore. Forward your resume in confidence.

P-2404 Electronics
520 N. Michigan Ave., Chicago 11, Ill.

ELECTRONICS ENGINEER

Our Company is setting up a new Industrial Electronic group and may have just the position you are seeking. We would like to engage a man capable in the application of electronic measuring and control systems to industrial processes. Prefer he be familiar with electrical laboratory test equipment and current in knowledge of available instrumentation. Knowledge of pulse techniques and transistor circuitry background would be very helpful. Reply immediately giving education, experience, age and salary expected.

P-2479, Electronics
520 N. Michigan Ave., Chicago 11, Ill.

Micro-wave Radio

TELECOMMUNICATIONS ENGINEER

Major eastern railroad now actively engaged in every area of communications is seeking experienced communications engineer who desires:

- Practical application of his training and experience in an essential industry.
- Good salary and benefits with definite growth potential leading to management position.

Candidate should have 3 to 5 years experience in communications field.
Send confidential resume to

MR. R. R. HICKS
Director of Personnel Services
N. Y. CENTRAL SYSTEM
New York 17, N. Y.

ELECTRONIC ENGINEERS

STAVID
Engineering, Inc.

STAVID offers: Career Opportunities based on solid, long-term growth . . . Top Earnings fully commensurate with experience . . . Challenging Assignments made possible by project diversification. Degree or graduate degrees in Electrical or Mechanical Engineering, Physics or Math required.

■ DESIGN ENGINEERS — WEAPONS SYSTEMS

Broad experience desired in weapons systems. Creative and analytical abilities required in missile guidance systems, radar, I R, inertial devices, computers and countermeasures. These positions are in Stavid's Preliminary Design Department.

■ DESIGN ENGINEERS — PULSE MODULATORS & TRANSMITTERS

Design and development background in very high power UHF RF amplifiers (100 kilowatt region) including design of associated grid and plate distributed parameter circuits. Design of high power line-type pulse modulator circuits for driving high power transmitter tubes.

Additional Career Opportunities Available In:

■ ANALOG & DIGITAL COMPUTERS ■ ANTENNA DESIGN ■ COMMUNICATION SYSTEMS ■ SEARCH AND BOMBING RADARS ■ MISSILE GUIDANCE AND DETECTION SYSTEMS ■ TEST EQUIPMENT DESIGN ■ ELECTRONIC PACKAGING ■ DATA PROCESSING SYSTEMS ■ ENVIRONMENTAL TESTING

STAVID's facilities in Plainfield, New Jersey, at the foothills of the Watchung Mountains, are near excellent schools, modern shopping facilities and ample housing accommodations. With New York City just 45 minutes away, and the New Jersey shore within one hour's drive, the Plainfield area provides an ideal environment for work, recreation and comfortable suburban living.

For complete details, please send detailed resume to:

J. R. CLOVIS, Personnel Department "E"

STAVID Engineering, Inc.

U.S. HIGHWAY 22, PLAINFIELD, NEW JERSEY PLAINFIELD 7-1600

Imaginative Electronics . . .

engineers

What kind of professional climate is essential to you as a creative man?

The "right" Professional Climate doesn't just happen. It has to be created — painstakingly, with careful planning, foresight and creative inspiration.

If you would like to know how General Electric's Advanced Electronics Center at Cornell University has built an ideal creative environment — and the many opportunities and rewards that await you as an engineer or scientist at the Center — please clip and return the coupon below for your free copy of the brochure entitled "Professional Climate."

GENERAL ELECTRIC

Mr. James R. Colgin, Div. 69-WJ
Advanced Electronics Center at Cornell University
General Electric Company
Ithaca, New York

Please send me a free copy of the brochure "Professional Climate."

NAME

ADDRESS

City & State

DEGREE(S)

My field of interest is (please check) ☐ Data handling ☐ Radar ☐ Human Engineering ☐ Infrared ☐ Electronic Systems ☐ Communications ☐ Vehicle Guidance ☐ Engineering Data & Publications ☐ Engineering Physics ☐ Servo Systems ☐ Advanced Circuit Design ☐ Countermeasures.

ENGINEERS
Research and Development

DAYSTROM INSTRUMENT Division

Offers qualified engineers
CREATIVE ASSIGNMENTS
in the following fields

- RADAR
- COMMUNICATIONS
- NUCLEAR INSTRUMENTS
- COMPUTERS
- TRAINERS & SIMULATORS
- COUNTERMEASURES
- TELEMETERING

Live, work and play near the famous POCONO Mountains resort area

Send full resume in complete confidence to
Robert M. Hill, Technical Employment Supervisor

DAYSTROM INSTRUMENT
Division of Daystrom Inc. Archbald, Penna.

MAN HUNTERS
....ATTENTION!

When you are in need of specialized men for specialized jobs—from general managers to supervisors—contact them through the EMPLOYMENT OPPORTUNITIES SECTION of McGraw-Hill publications.

The EMPLOYMENT OPPORTUNITIES SECTION is the national market place for those wanting the services of men in technical, engineering and operating capacities in the fields served by these publications.

AMERICAN MACHINIST
AVIATION WEEK
BUSINESS WEEK
CHEMICAL ENGINEERING
CHEMICAL WEEK
COAL AGE
CONSTRUCTION METHODS AND EQUIPMENT
CONTROL ENGINEERING
ELECTRICAL CONSTRUCTION AND MAINTENANCE
ELECTRICAL MERCHANDISING
ELECTRICAL WHOLESALING
ELECTRICAL WORLD
ELECTRONICS
ENGINEERING AND MINING JOURNAL
ENGINEERING NEWS-RECORD
FACTORY
FLEET OWNER
FOOD ENGINEERING
NATIONAL PETROLEUM NEWS
NUCLEONICS
PETROLEUM WEEK
POWER
PRODUCT ENGINEERING
PURCHASING WEEK
TEXTILE WORLD

The men you need are the men who read the
EMPLOYMENT OPPORTUNITIES SECTION of

McGRAW-HILL PUBLICATIONS
Classified Advertising Division
P. O. BOX 12, NEW YORK 36, N. Y.

PERSONNEL MANAGERS

LOOKING FOR
Experienced Engineers . . .
Technical Personnel?

Write for a free copy of:

"How You Can Reach The Experienced Engineer . . ."

The top-flight engineers and technical personnel you want are at a premium . . . as this twelve page booklet points out. How you can reach and influence these men is the story told.

The booklet tells where to find the experienced engineer. It explains how you can make contact . . . channel and concentrate your employment advertising to just the men with the job qualifications you want. Included are testimonials from personnel men who use technical publications successfully . . . sample advertisements that got results . . . helpful hints to consider and pitfalls to avoid when you prepare your copy and layout for an Employment Opportunity advertisement.

Write for your free copy to:

V. C. Downey
Classified Advertising Division
McGraw-Hill Publishing Co., Inc.
P.O. Box 12
New York 36, New York

ENGINEERS

Diverse New R & D Programs
Create Immediate Opportunities at

GENERAL DYNAMICS
ELECTRIC BOAT DIVISION

Pioneer in design and development of nuclear-powered submarines, Electric Boat Division is embarked upon a broad program of expansion and diversification in advanced technological areas. Typical of the challenging projects now under way is the control system for a 140-ft. precise radio telescope to be constructed for the National Radio Astronomy Observatory. This control system will enable research scientists and astronomers to steer and point this large radio telescope with greater precision than previously has been possible for any size radio telescope.

Other stimulating projects in progress include:

LARGE CONTROL SYSTEMS
• *World's largest wind tunnel* • *Submarine control systems*

TRAINING EQUIPMENT
• *Simulators and training devices for missiles, submarines and other weapons systems*

ADVANCED SUBMARINE DEVELOPMENT
• *Integrated control systems for weapons guidance, missile launching, navigation, ship control, sonar*

▶ *IMMEDIATE OPENINGS FOR KEY PERSONNEL:*

MISSILE CONTROL SYSTEMS

Engineers with 2 or more years of professional experience in the mechanical, marine, electrical or electronics fields are needed to take complete charge of static and operational tests of equipment and systems in Polaris missile fire control and navigation, missile launching and handling, nuclear reactor control and instrumentation, electric power generation and distribution, high-pressure air and hydraulic service systems and many other equally challenging submarine systems.

CIRCUITS & EQUIPMENT

Development of circuits and equipment in conjunction with missile and navigation systems installations aboard submarines. Requires EE degree with advanced courses and experience in servomechanisms.

ELECTRICAL SYSTEMS

1. 5 years experience on shipboard electrical systems design. For design of electrical power and control systems for prototype nuclear propulsion systems for a marine gas cooled reactor plant.

2. EE, ME or Physics degree required. Responsible for conceptual engineering and systems analysis of large complex devices employing a combination of electrical, electronic, electromechanical, hydraulic and pneumatic systems. Should be familiar with servomechanisms theory, experienced in use of analog or digital computers as a design tool, and have a good grasp of mathematics. Will work on proposal preparations, feasibility studies and execution of hardware contracts.

SERVOMECHANISMS

For engineering design of servomechanisms in both the instrument and multiple horse-power class. Will interpret performance specifications and be responsible for design of a system in accordance with the specifications, including stability studies, and the calculation of other performance criteria.

COMPUTERS

Responsible for conceptual engineering and programming of special purpose digital and analog computers. Should be familiar with system engineering, experienced in programming and check systems for both analog and digital computers with good grasp of simulation techniques. Requires EE, Physics or Mathematics degree.

CIRCUITS

Responsible for conceptual and production engineering of electronic equipment. Familiar with servomechanisms and analog computer theory. Experienced in use of semiconductors, magnetic amplifiers and vacuum tube circuit elements; good grasp of mathematics; EE or Physics degree.

OPERATIONS RESEARCH

PhD in physical sciences required. To be responsible for operations research studies of submarine and anti-submarine weapons systems.

Electric Boat Division is located on the beautiful Connecticut shore near New London. Situated half way between Boston and New York City, it affords gracious New England living and year round recreation for you and your family.

To arrange convenient appointment, write in confidence to James P. O'Brien, Technical Employment Supervisor.

GENERAL DYNAMICS
ELECTRIC BOAT DIVISION

GROTON CONNECTICUT

ELECTRONIC
WAR TERMINATION INVENTORIES

WRITE OR WIRE FOR INFORMATION ON OUR COMPLETE LINE OF SURPLUS ELECTRONIC COMPONENTS. ALL PRICES NET F.O.B. PASADENA, CALIFORNIA

C&H SALES CO.
2176-B East Colorado St.
Pasadena 8, California
RYan 1-7393

SIMPLE DIFFERENTIAL WITH BALL-BEARING SUN GEARS



The 1:1 reverse ratio spur gears are 48-tooth, 32 pitch brass with 3/16" available face. On one side, the shaft is 23.64" dia. for 11/16" and has a pin hole, then increases in dia. to .377" for the remaining 3/16" of length. On the other side, the shaft is .377 dia. ¼" lg. 2-13/16" dia. is required to clear the body.
Stock no. A6-115.....each **$15.00**

SIMPLE DIFFERENTIAL WITH SPACED-OUT SUN GEARS



1:1 reverse ratio spur gears are aluminum, 3/32" face, 32 pitch, 32 tooth on one side, 48 tooth on the other. The body is ¾" thick, but the sun gears are spaced out so that they are 1½" apart. ¼" dia. shaft on each side is 23/32" long. OA length 3⅛". Requires 1-23/32" dia. to clear the body.
Stock no. A6-124.....each **$4.50**

SIMPLE DIFFERENTIAL



1:1 reverse ratio, 60 teeth on large gear; ¼" shaft. Size: 3" long with 1-15/16" dia.
Stock no. A6-104.....each **$3.95**

DUAL SIMPLE DIFFERENTIAL



1:1 reverse ratio on both. Size: 3¼" long x 1-7/16" dia. Shaft size: ⅛" and 5/32".
Stock no. A6-107.....each **$7.50**

SPERRY VERTICAL GYRO

Part #653265. Motor 115 volts, 3 phase, 400 cycle, 8 watts, 20,000 RPM. 3-minute runup, synchro pickoffs, roll 360°, pitch 85°. Synchro excitation 26 volts, 400 cycle, 150 m.a. Vertical accuracy ±½°. Weight 3½ lbs. Approx. dim. 5¾" L., 4½" W., 4½" H.
Price $35.00

MINNEAPOLIS-HONEYWELL RATE GYRO (Control Flight)

Part no. JG7005A, 115 volts A.C., 400 cycle, single phase potentiometer take off resistance 530 ohms. Speed 21,000 r.p.m. Angular momentum 2½ million, CM²/sec. Weight 2 lbs. Dimensions 4-7/32 x 3-29/32 x 3-31/64.
Price $22.50

VARIABLE SPEED BALL DISC INTEGRATORS (All Shafts Ball Bearing Supported)

No. 145 Forward & Reverse 2¼-0-2¼. Input shaft spline gear 12 teeth 9/32" dia. ⅜" long. Output shaft 15/64" dia. x 15/32" long. Control shaft 11/32" x ⅜" long. Cast aluminum construction. Approx. size 3" x 3" x 2¾".....**$17.50**

No. 146 Forward & Reverse 4-0-4. Input shaft 5/16" dia. x ¾" long: Output shaft 15/64" dia. x 9/16" long. Control shaft 11/64" dia. x 11/16" long. Cast aluminum construction. Approx. size 4½" x 4½" x 4".
$18.50 ea.

SMALL DC MOTORS



(approx. size overall 3¾" x 1¼" dia.:)

5067043 Delco 12 VDC PM 1" x 1" x 2", 10,000 rpm.	$7.50
5067126 Delco PM, 27 VDC, 125 RPM, Governor Controlled	15.00 ea.
5069600 Delco PM 27.5 VDC 250 rpm	12.50
#5069625 120 rpm, mfr. Delco, 27 VDC governor controlled	$15.00
5069230 Delco PM 27.5 VDC 145 rpm	15.00
5068750 Delco 27.5 VDC 160 rpm w. brake	6.50
5068571 Delco PM 27.5 VDC 10,000 rpm (1x1x2")	5.00
5069790 Delco PM, 27 VDC, 100 RPM, Governor Controlled	15.00 ea.
#5069800 575 rpm, mfr. Delco, 27 VDC, PM reversible governor controlled, equipped with 27 VDC clutch	$17.50
5072735 Delco 27 VDC 200 rpm governor controlled.	15.00
5BA10A118 GE 24 VDC 110 rpm	10.00
5BA10AJ37 GE 27 VDC 250 rpm reversible	10.00
5BA10AJ52 27 VDC 145 rpm reversible	12.50
5BA10AJ50, G.E., 12 VDC, 140 rpm	15.00
5BA10FJ401B, G.E. 28 VDC, 215 rpm, 10 oz. in., .7 amp. contains brake	15.00
5BA10FJ421, G.E. 26 VDC, 4 rpm, reversible, 6 oz. in., .65 amp	15.00

SYNCHROS SERVOS



FPE-25-11 Diehl Servo 75/115 v 60 cy.	12.50
FPE 49-7 Diehl servo motor, 115 volts, 60 cycle, 10 watts	30.00
FPE-43-1 Resolver 400 cy.	19.50
FJE-43-9 Resolver 115V 400 cy.	15.00
R110-2A Kearfott Cont. Mfr.	17.50
R111-2A	20.00
R112-2D-B	22.50

HONEYWELL VERTICAL GYRO MODEL JG7003A-1

115 volts, 400 cycles, single phase, 35 watts. Pitch and roll potentiometer pickoffs 890 ohms, 40 volts max. AC or DC. Speed 20,000 rpm, ang. momentum 12,500,000 gm-cm ²/sec. Erection system 27 VAC, 400 cycles, time 5 min. to ½°. Weight 5.5 lbs. Price **$35.00** each

lab grade TEST EQUIPMENT for sale
standard brands—military surplus
(new or professionally reconditioned)
experienced problem solvers and budget-cutters
ENGINEERING ASSOCIATES
434 Patterson Road Dayton 19, Ohio

WANTED
ALLEN-BRADLEY
RESISTORS & POTENTIOMETERS
LEGRI S COMPANY
391 Riverdale Ave. Yonkers 5, N. Y.

SEARCHLIGHT Equipment Locating Service

NO COST OR OBLIGATION

This service is aimed at helping you, the reader of "SEARCHLIGHT", to locate Surplus new and used electronic equipment and components not currently advertised. (This service is for USER-BUYERS only).

How to use: Check the dealer ads to see if what you want is not currently advertised. If not, send us the specifications of the equipment wanted on the coupon below, or on your own company letterhead to:

Searchlight Equipment Locating Service
c/o ELECTRONICS
P. O. Box 12, N. Y. 36, N. Y.

Your requirements will be brought promptly to the attention of the equipment dealers advertising in this section. You will receive replies directly from them.

Searchlight Equipment Locating Service
c/o ELECTRONICS
P. O. Box 12, N. Y. 36, N. Y.

Please help us locate the following equipment components.

.....

.....

.....

NAME .....

TITLE .....

COMPANY .....

STREET .....

CITY 9/11/59

INDEX TO ADVERTISERS

ACDC Electronics, Inc. 169
AMP Incorporated 65
Ace Electronics Associates Inc. 202
Ace Plastics Co. 231
Acoustica Associates, Inc. 87
Acton Laboratories, Inc. 186
Aerovox Corporation 216
Airpax Electronics, Inc. 135
Alford Mfg. Co. 197
Allen-Bradley Co. 83
Allied Chemical Corporation 163
American Lava Corp. 155
American Smelting and Refining Company 82
American-Standard 210
Associated Research, Inc. 208

Baird-Atomic, Inc. 84
Ballantine Laboratories, Inc. 138
Bell Telephone Laboratories 31
Bendix Aviation Corp. Pioneer Central Div. 191
Bendix-Pacific 225
Bird Electronic Corp. 62
Blaw-Knox Company 141
Boesch Mfg. Co., Inc. 126
Borden Chemical Co., Resinite Department 54
Borg Equipment Division Amphenol-Borg Electronics Corp. 134
Bourns Laboratories, Inc. 75
Bradley Semiconductor Corp. 148
Bristol Co., The 195
British Industries Corp. 244
Brookhaven National Laboratory 228
Bruno-New York Industries Corp. 211
Burnell & Co., Inc. 3

CBS Electronics 88
California Technical Industries, Division of Textron, Inc. 57
Cannon Electric Company 151
Centralab, A Division of Globe-Union, Inc. 149
Chester Cable Corp. 63
Cinema Engineering 243
Clare & Co., C. P. 69
Clarostat Mfg. Co., Inc. 71
Columbus Electronics Corp. 52
Computer Instruments Corporation 39
Computer Measurements Company 49
Convair 201
Coors Porcelain Company 67
Couch Ordinance, Inc. 245
Crane Packing Company 140
Curtis Universal Joint Co., Inc. 208
Curtis-Wright Corp. 174, 215

Dale Products, Inc. 143
Daven Co., The ..... 3rd Cover
Deeco, Inc. 23
DeJur-Amsco Corp. 34
Deluxe Coils, Inc. 231
DeMornay-Bonardi 76
Dilectrix Corp. 219
Douglas Aircraft Co., Inc. 28, 29
Dow Corning Corp. 12, 13
Drakenfeld & Co., Inc. 214
Downey-Capri Motel 233
Driver-Harris Co. 129
DuPont De Nemours & Co., (Inc.) E. I. Freon Products Division 164
Polychemicals Dept. 17, 18, 19, 20
Durant Mfg. Co. 194

Edgerton, Germeshausen & Grier, Inc. ... 146
Edo Corporation 176
Eitel-McCullough, Inc. 10
Electro Instruments, Inc. 2
Electronic Instrument Co., Inc. (EICO) 176
Electro-Measurements, Inc. 200
Electronic Measurements Co., Inc. 167
Electronic Research Associates, Inc. 127
Electro-Pulse, Inc. 180
Empire Devices Products Corp. 24
Erie Resistor Corp. 152
Esterline-Angus Company, Inc. 196

Fairchild Controls Corp. 53
Fansteel Metallurgical Corp. 37, 38
Filtors, Inc. 105
Frenchtown Porcelain Company 168

You are there – with Cinema...

Professor Reginald Upjohn

(Somewhere west of the Thames)

"By Jove, anything for a laugh. Those nuclear lab chaps said they'd give me a jolly gift for my birthday, and here it is. Claimed I'd receive a bloody big bang out of it. Glad they're still not angry with me for tossing that firecracker into the blockhouse test chamber during the last countdown. Ho, ho, did they jump. The tag on this whatsit says, MINIATURE DO-IT-YOURSELF DEMOLITION KIT. What a bully joke. I'll press this tiny button and count to three, like the instructions read. Wonder what humorous little thing will pop up. One ...Two...Thr...."

Keep right on smiling, Professor, it won't explode. You're looking at CINEMA ENGINEERING'S new miniature audio attenuator for dialogue mixing and master control. This outstanding scientific achievement is the result of three years of engineering and two years of field testing. Available in both the new "Preferred" and "Custom" series, these rotary tap units represent one of the most reliable of their type on the market today. Include CINEMA'S new miniature in your next replacement or console job. Write for catalog 18A.

CINEMA
ENGINEERING
DIVISION AEROVOX CORPORATION
1100 CHESTNUT · BURBANK, CALIF.

G-L Electronics 158
GRH Hailtest Company 232
General Electric Co.
Apparatus Division 43, 169
Lamps Metals and Components Dept... 6
Military Electronics Dept. 153, 198
General Findings & Supply Corp..... 246
General Instrument Corp. 160, 161
General Products Corp. 213
General Public Utilities Corp. 166
General Transistor Corp. 123
Gertsch Products, Inc. 219
Good-All Electric Mfg. Co. 42
Goodrich Company, B. F. 70
Gries Reproducer Corp. 210

Handy & Harman 86
Hart Manufacturing Company 192
Haydon, Stone Co., Inc. 227
Haydon Division of General Time Corp.. 66
Heath Company 181
Helipot Div. of Beckman Instruments, Inc. 175
Hewlett-Packard Co. 8, 9
Hoyt Electrical Instruments 164
Hughes Aircraft Company 25

Illinois Water Treatment Co. 189
Industrial Test Equipment Co. 217
Industrial Timer Corp. 58
Instruments for Industry 171
Intermetall 207
International Business Machines Corp... 121
International Instruments, Inc. 172

J F D Electronics Corp. 137
Jet Propulsion Laboratory 78

Kearfott Company, Inc. 32
Keithley Instruments, Inc. 198
Kellogg Switchboard & Supply Co. 170
Kip Electronics, Inc. 226
Kleinschmidt-Division of Smith-Corona.. 68

Lafayette Radio 215
Lampkin Laboratories, Inc. 233
Linde Company 165, 223
Link Aviation, Inc. 133

World's most accurate Laboratory Standards

Resistance—Inductance—Capacitance

H. W. SULLIVAN LTD.



Model AC440 Direct-Reading, Non-Reactive Decade Resistance. 11,111 ohms, 5 dials, 0.1 ohm increments, 0.01% Accuracy.

NON-REACTIVE DECADE RESISTORS 0.01% ACCURACY DC to 50 kc.

H. W. Sullivan decades and slidewires are guaranteed accurate to 0.01% from DC to at least 50 kc, **direct reading** without corrections of any kind and without reference to calibration certificates. Units are available from 100 to 100,000 ohms, with 1 to 5 dials. A patented method of reactance compensation permits choice of minimum inductance error, minimum resistance error, or best compromise. The effect of shielding capacity is entirely eliminated. These are the most stable alternating current standards known, and they may be used with equal success on DC. Sullivan DC Resistance Standards are available with accuracies as high as 0.001%. Kelvin and Wheatstone Bridges may be had covering the range of 0.0000001 ohms to 10 megohms, with accuracies of 0.01% to 0.05%.

STANDARDS OF SELF AND MUTUAL INDUCTANCE 0.01% ACCURACY

H. W. Sullivan air cored standards of self and mutual inductance are available in fixed values, in single or multiple decades, and continuously variable. They range in values from 1 μH to 1 H with an accuracy of 0.01%—direct reading. They have a stability of 1 part in 10^5 over long periods and a temperature coefficient less than 5 parts in 10^6 per degree C due to a novel method of geometrical compensation, with high "Q" values and good and known frequency characteristics. **These inductances are integral parts of the SULLIVAN Inductance Bridge which covers the range of 1 μH to 100 H with an overall accuracy of measurement better than 0.1% over most of the range.**

STANDARDS OF CAPACITANCE 0.01% Accuracy

H. W. Sullivan produces a complete range of capacitors and capacitor decades, fixed or variable, air and mica dielectric, from a few $\mu\mu$F up to 5 μF in value. The guaranteed accuracy of most of these is 1 part in 10^4 and their stability is 1 part in 10^5. Temperature coefficients of less than 10 parts in 10^6 per degree C are obtained and are cyclic to 1 part in 10^6. Power factors of 0.00001 (as two terminal capacitances) are maintained up to 10^5 or 10^6 cps. Low residual inductance and high insulation resistance are features of all. **These capacitors are integral parts of the SULLIVAN Capacitance Bridge which covers the range of 0.1 $\mu\mu$F to 100 μF, accurate to 0.01% over part of the range.**

Sullivan Standards of Inductance, Capacitance and Resistance are known throughout the world for unequalled accuracy and stability.

We invite inquiries regarding your specific requirements.

B.I.C. ENDORSED QUALITY

Address Dept. ZM169
Special Instruments Division
BRITISH INDUSTRIES CORP
PORT WASHINGTON, N. Y.

0-15mc with ONE BASIC MULTI-PURPOSE SPECTRUM ANALYZER

PANORAMIC'S SPA-3

for maximum economy ...maximum application

Combines the most desirable features of a whole series of equipments and MORE . . . in one compact functional unit:

- 3 mc wide sweepwidth continuously adjustable down to 0
- Variable tuning control calibrated from 0 to 13.5 mc
- Variable resolution 200 cps to 30 kc
- Variable scan rate 1 cps to 60 cps
- Lin, log and square law amplitude scales
- High sensitivity — 20 μ full scale
- Calibrated 100 db attenuator

SPA-3/25 EXTENDS RANGE —200 cps to 25 mc

Same basic circuitry as SPA-3, but with greatly extended frequency range. Controls and parameters similar, except variable tuning control is calibrated 0 to 23.5 mc.

Ask for Catalog Digest and the PANORAMIC ANALYZER

the pioneer is the leader

PANORAMIC
RADIO PRODUCTS, INC.

530 So. Fulton Ave., Mt. Vernon, N. Y.
OWens 9-4600
Cables: Panoramic, Mt. Vernon, N. Y. State

CIRCLE NO. 286 READER SERVICE CARD

Lockheed Missiles and Space Division... 212
Los Alamos Scientific Laboratory 206
Lumatron, Inc. 59

Malco Mfg. Co. 219
Mallory & Co., Inc., P. R. 72, 73
Marconi Instruments 154
Marion Instrument, Div. of Minneapolis-Honeywell Regulator Co. 176
Martin Company 144, 145
McGraw-Hill Book Company 199
Micromech Mfg. Corp. 209
Micro-Switch Div. of Honeywell 16
Minneapolis-Honeywell 213
Minnesota Mining and Manufacturing Company 157
Mobay Chemical Company 48
Motorola, Inc. 222
Mucon Corp. 225
Mycalex Corp. of America 106

NJE Corporation 77
New Hermes Machine Engraving Co.... 232
Non-Linear Systems, Inc. 46
North Atlantic Industries, Inc. ..189, 191, 193
Northern Radio Company, Inc. 196

Ohmite Mfg. Co. 15
Ozalid, A Division of General Aniline & Film Corporation 36

Packard Bell Electronics 147
Panoramic Radio Products, Inc. ..218, 226, 244
Philco Corporation 108
Philco Government & Industrial Division 107
Phillips Gloeilampenfabrieken, N. V. 21
Physics Research Labs. 231
Pitometer Log Corp. 213
Plastics & Coal Div. of Allied Chemical Corp. 26, 27
Polytechnic Research & Development Co., Inc. 211
Potter Company 190
Potter Instrument Co., Inc. 179
Precision Scientific Co. 193

Radio Corporation of America ..... 4th Cover
Rantec Corp. 225
Raytheon Company 45, 80, 81, 177

Raytheon relies on

COUCH RELAYS*

for the

HAWK . . .

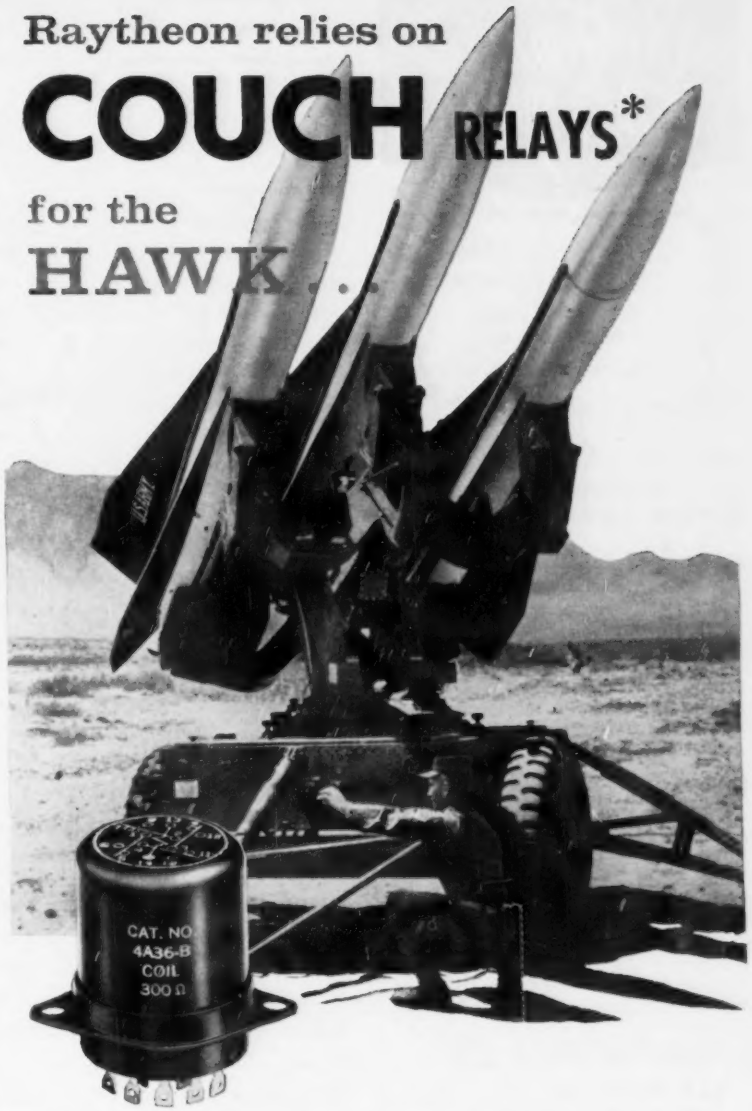

IMPORTANT SPECIFICATIONS

Contacts: 4PDT - Dry circuit to 3 amperes
Size: 1 3/32" D x 1 1/2"
Weight: 3.2 oz.
Pull-in power: ½ watt
Ambient Temperature: −65°C to +125°C
Vibration Resistance: 20G, 5 to 2000 cps
Shock Resistance: 75G operating, 200G non-operating

Couch Relays are used in the successful Hawk missile now being produced by Raytheon Company for the U.S. Army. Designed primarily to attack low flying aircraft from mobile launchers at a battle front, or from fixed installations in populated areas of the United States, the Hawk's mission leaves no room for error or unreliability of its systems. The production quantities of Couch Relays used in these systems measure up to this required reliability.

Write for our new catalog on the full Couch line of rugged rotary relays.

Couch ORDNANCE INC.

A subsidiary of S. H. Couch, Inc.

*CVE TYPE

3 Arlington Street North Quincy, Mass.

WHICH IS *Your* CONTACT PROBLEM ?

- ☐ Finish
- ☐ Delivery
- ☐ Wear
- ☐ Unit Cost
- ☐ Choice of Alloy
- ☐ Tooling Costs
- ☐ Dimensional Accuracy

NOW THAT YOU'VE DESIGNED IT, HAVE **GENERAL FINDINGS AND SUPPLY COMPANY** MAKE IT!

After design, contact problems really begin! You may have already experienced a problem listed above, or are anticipating one. General Findings & Supply, specialists in precious metal miniature contacts, can solve these problems, and help with design, too! Please check appropriate box or boxes and mail with a blueprint of sketch. Your blueprint and specifications will receive our immediate attention, and prompt quotation.

Some of the thousands of precision contacts and assemblies custom made by General Findings & Supply are shown above.

For special applications, the following Technical Data Sheets are available:

- ☐ No. 301 Contact Materials
- ☐ No. 401 Collector or Slip Rings
- ☐ No. 601 226H Alloy for Contact Blades

Manufacturers of precious metal miniature contacts for:
POTENTIOMETERS • SYNCHROS
RELAYS • SWITCHES

INDUSTRIAL DIVISION
GENERAL FINDINGS
AND SUPPLY COMPANY
ATTLEBORO, MASS.

Sales Offices: Attleboro, New York, Detroit Cleveland, Dayton, Chicago, and Los Angeles

52 Pearl Street, Attleboro, Massachusetts

Reflectone 169
Rixon Electronics, Inc. 228
Rotron Mfg. Co., Inc. 187
Royal Electric Corporation 160

Sanborn Company 79
Sarkes Tarzian, Inc. 173
Schober Organ Corp. 185
Servo Corporation of America 182
Shalleross Mfg. Co. 162
Sigma Instruments, Inc. 178
Simpson Electric Company 30
Spectrol Electronics Corporation 188
Spectronic Plating Co., Inc. 220
Sperry Gyroscope Company Division of Sperry Rand Corporation 125
Sprague Electric Company 5
Stackpole Carbon Company 85
Stoddart Aircraft Corp. 205
Stonite Coil Corp. 194
Superior Cable Corp. 156
Superior Electric Company, The 55, 56
Superior Electronics Corporation 227
Superior Tube Company 44

Tech Laboratories, Inc. 216
Technical Information Corporation 207
Technology Instrument Corp. 131
Tektronix, Inc. 64
Temco Aircraft Corp. 7
Texas Instruments Incorporated 22, 33, 139
Thermocal 130
Transco Products, Inc. 183
Transradio, Ltd. 220
Transitron Electronic Corp. 60, 61
Tri-Chem, Inc. 217
Trio Laboratories, Inc. 41

United States Testing Company, Inc. 150
United Transformer Corporation ..... 2nd Cover

Varian Associates 159
Veeder-Root, Inc. 50, 51
Vitramon, Inc. 184

Walsco Electronics Mfg. Co. 176
Western Devices, Inc. 214
Westinghouse Electric Corp. 14, 35, 74
Williams & Co., C. K. 212

■

Professional Services 233

■

CLASSIFIED ADVERTISING
F. J. Eberle, Business Mgr.

EMPLOYMENT OPPORTUNITIES 233-241

EQUIPMENT
(Used or Surplus New)
For Sale 242

WANTED
Equipment 242

ADVERTISERS INDEX

Avco Research & Advanced Development. 233
Bendix Aviation Corp., Kansas City Div.. 237
C & H Sales Co. 242
Daystrom Instrument 240
Diamond Power Specialty Corp. 239
Engineering Associates 242
General Dynamics-Electric Boat Div. 241
General Electric Co. 236, 240
International Business Machines Corp. ... 236
Legri S Co. 242
Microtan Co. 238
New York Central System 239
Republic Aviation Corp. 234
Sanders Associates Inc. 238
Stavid Eng. Inc. 239
Sylvania (Mt. View) 234
Texas Instruments Inc. 235
Vitro Laboratories Div. of Vitro Corp. of America 237

This index is published as a service. Every care is taken to make it accurate, but ELECTRONICS assumes no responsibilities for errors or omissions.

Daven precision wire wound resistor...

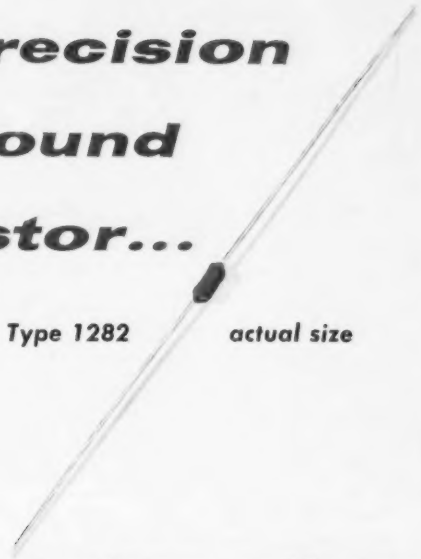

Type 1282 *actual size*

makes other miniatures look like giants!

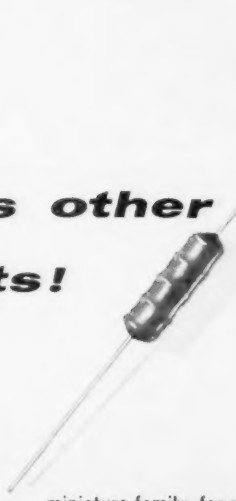

DOWN, DOWN, DOWN go the dimensions of Daven precision wire wound resistors. The latest: a micro-miniature resistor that is the **smallest ever made!** Developed for a major missile program to meet stringent space requirements without sacrificing reliability, this Type 1282 meets all specifications of MIL-R-93B, Amendment 3, except physical size.

Specify Type 1282, or other units in the Daven micro-miniature family, for all of your small-size, high-reliability wire wound resistor requirements. Available in all tolerances and temperature coafficents.

Type	Diam	Length	Max Watts	Max Ohms
1250	1/4	1/2	.33	1 megohm
1273	1/4	5/16	.25	400K
1274	3/16	3/8	.25	250K
1282	1/8	1/5	.05	100K
1284	1/4	27/64	.25	1 megohm

Write today for complete information!

THE DAVEN CO. LIVINGSTON, NEW JERSEY

TODAY, MORE THAN EVER, THE DAVEN ⓓ STANDS FOR DEPENDABILITY

Another RCA Contribution to Microwave Electronics

Economies in equipment size, weight, and power consumption begin with...

RCA PPM TRAVELING-WAVE TUBES

for **X-Band** *operation*

RCA Dev. Type 1140 PPM Traveling-Wave Tube—cut away to show self-contained periodic permanent magnets

RCA TRAVELING-WAVE TUBES FOR X-BAND OPERATION

RCA Type No.	Frequency (MC)	Typical Performance		Duty Factor	Focusing Method	Approx. Size	
		Power Output	Low-level Gain (db)			Weight (lb.)	Length (in.)
A-1140	8000-12000	10 mw	40	CW	PPM	5½	14
A-1133	8000-12000	1 w	35	CW	PPM	6	15
A-1181	7500-11200	50 peak watts	35	0.05	PPM	6	14

RCA Microwave-Tube Engineers invite inquiries for customized versions

RCA's continuing program to provide designers with a comprehensive and reliable line of traveling-wave tubes is exemplified by three new PPM focused X-band TWT's.

Focusing by means of Periodic Permanent Magnets makes possible more compact and lighter equipment designs. Waveguide couplings significantly reduce power loss, improve performance and efficiency in this complimentary family of developmental X-band traveling-wave tubes for ECM, drone target systems, and radar applications. And all three tubes are designed for high-altitude airborne operation.

For traveling-wave tubes in any application in the L, S, C, and X bands, call the RCA Field Office nearest you. Your RCA Field Representative will be happy to give you detailed information on RCA commercial and developmental types—or customized versions—for your specific system needs.

GOVERNMENT SALES

HARRISON, N. J.
415 S. 5th Street, HUmboldt 5-3900

DAYTON 2, OHIO
224 N. Wilkinson St., BAldwin 6-2366

WASHINGTON 6, D. C.
1625 "K" St., N.W., District 7-1260

INDUSTRIAL PRODUCTS SALES

DETROIT 2, MICHIGAN
714 New Center Building, TRinity 5-5600

NEWARK 2, N. J.
744 Broad St., HUmboldt 5-3900

CHICAGO 54, ILLINOIS
Suite 1154, Merchandise Mart Plaza, WHitehall 4-2900

LOS ANGELES 22, CALIF.
6355 E. Washington Blvd., RAymond 3-8361

RADIO CORPORATION OF AMERICA
Electron Tube Division *Harrison, N. J.*